


SAE FFORX45

Female SAE flat face 'O' ring swivel.
45° swept elbow.

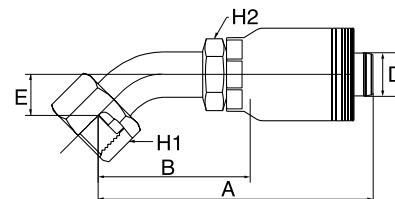


D									
-size	DN	"		A	B	E	H1	H2	REF.
				mm	mm	mm	mm	mm	GSM
-24	40	1.1/2	2" - 12 UN	236.6	141.4	38.0	60.0	55.0	24GSM24FFORX45-038

-24 size is 28.0 MPa (4000 psi).

SAE FFORX90

Female SAE flat face 'O' ring swivel.
90° swept elbow.

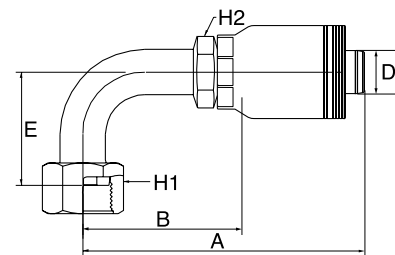


D									
-size	DN	"		A	B	E	H1	H2	REF.
				mm	mm	mm	mm	mm	GSM
-24	40	1.1/2	2" - 12 UN	227.4	132.3	86.0	60.0	55.0	24GSM24FFORX90M

-24 size is 28.0 MPa (4000 psi). / M: Medium drop per ISO 12151-1.

SAE FL

SAE 'O' ring flange. Code 61.



D								
-size	DN	"		A	B	K	KIT	REF.
				mm	mm	mm		GSM
-24	40	1.1/2	1.1/2"	180.0	85.0	60.3	24 PA-FL	24GSM24FL
-32	50	2	2"	251.4	137.4	71.4	32 PA-FL	32GSM32FL

Details on flange kits see page 250.

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.