

## MANUAL

Both the drum and the bracket in the **S. 430 manual hose reels** are in painted steel or AISI 304 or AISI 316 stainless steel. This contributes to their resistance in time and in particularly aggressive environments.

PAINTED  
STEEL

AISI 304 - 316  
STAINLESS  
STEEL



Note: All the hose reels in the table are without hose

Fluid - Pressure	PAINTED STEEL	AISI 304 S. STEEL	AISI 316 S. STEEL	Connection	
	P/N	P/N	P/N	inlet	outlet
Air - Water <b>20 bar</b> - brass swivel joint - Viton® seals	74300/10	74320/10	-	F 1/2" G	F 1/2" G
Water max 130° C <b>100 bar</b> - AISI 304 stainless steel swivel joint - Viton® seals	74300/20	74340/20 *	74350/20 **	F 1/2" G	F 1/2" G
Water max 130° C <b>200 bar</b> - AISI 304 stainless steel swivel joint - Viton® seals	74300/30	74340/30	74350/30 **	F 3/8" G	F 1/2" G
Water max 130° C <b>400 bar</b> - AISI 304 stainless steel swivel joint - Teflon® seals	74300/35	74340/35	74350/35 **	F 3/8" G	F 1/2" G
Oil and similar <b>150 bar</b> - galvanized steel swivel joint - "polyurethane" seals	74300/40	-	-	F 1/2" G	F 1/2" G
Grease <b>600 bar</b> - galvanized steel swivel joint - "polyurethane" seals	74300/50	74320/50	-	F 3/8" G	F 1/2" G
Diesel fuel <b>10 bar</b> - brass swivel joint - Viton® seals	74300/60	74320/60	-	F 1/2" G	M 1/2" G
				for hoses from 5/8" and 3/4"	

Note: for special fluids see the compatibility table at page 26


\* suitable also for oil

\*\* AISI 316 stainless steel swivel joint

### Hose reel capacity

ø hose external		Series 430
1/4"	14 mm	Length max 40 m
3/8"	17 mm	Length max 18 m
1/2"	20 mm	Length max 15 m
5/8"	21 mm	Length max 12 m
3/4"	27 mm	Length max 8 m

### Overall dimensions (mm)

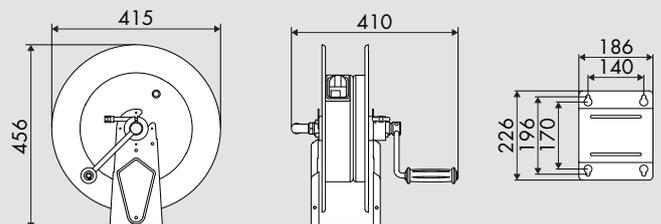

No.1 packing m<sup>3</sup> 0,110 kg 11