




Counterbalance, On A and B, Cross-Piloted





Pilot-To-Open Check, On A and B, Cross-Piloted



Reducing, On A and B, drain to opposite port



Reducing/Relieving, On A and B, Tanks and Drains to Opposite Port

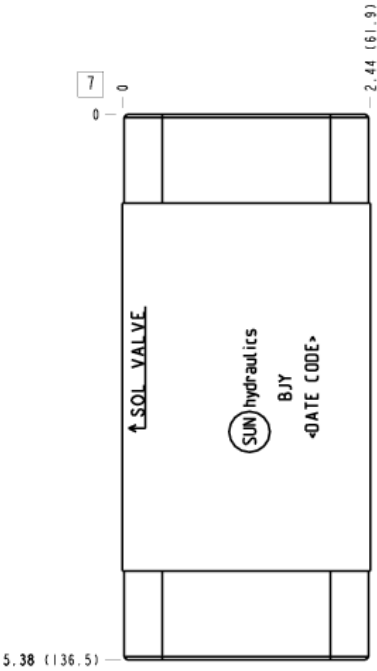

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 05 - X&Y
Body Features	On A and B with cross pilot
Stack Height	2.49 in.
Seal Plate Included (see notes)	No
Open Cavities	2
Cavity	T-2A
Model Weight	2.51 lb.

NOTES

- Stack height value in technical data table includes seal retainer plate.
- This installation requires a retainer and seal kit which are purchased separately. See "Related Accessories" section.
- Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

INCLUDED COMPONENTS

Part	Description	Quantity
340-001	Pipe Plug	2

CONFIGURATION OPTIONS

Model Code Example: BJJ

MODIFIER


- 6061-T651 Aluminum, Buna-N
- /11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- /10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- /S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
- /S4 65-45-12 Ductile Iron, Buna-N, Chem. Black
- /S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 2

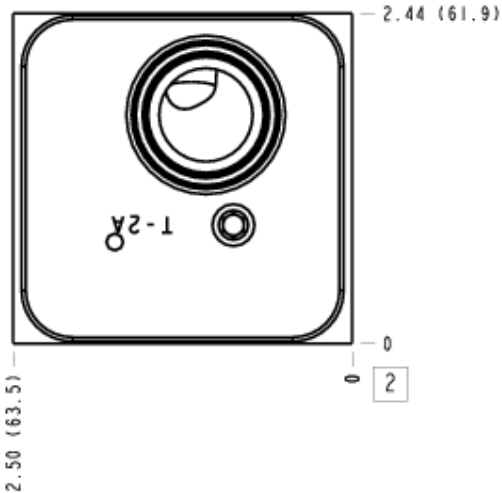


Face 5

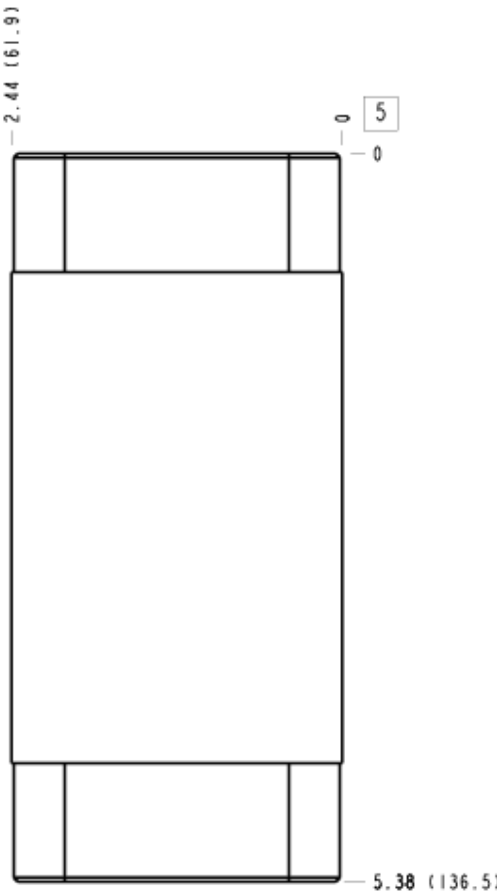


Face 6

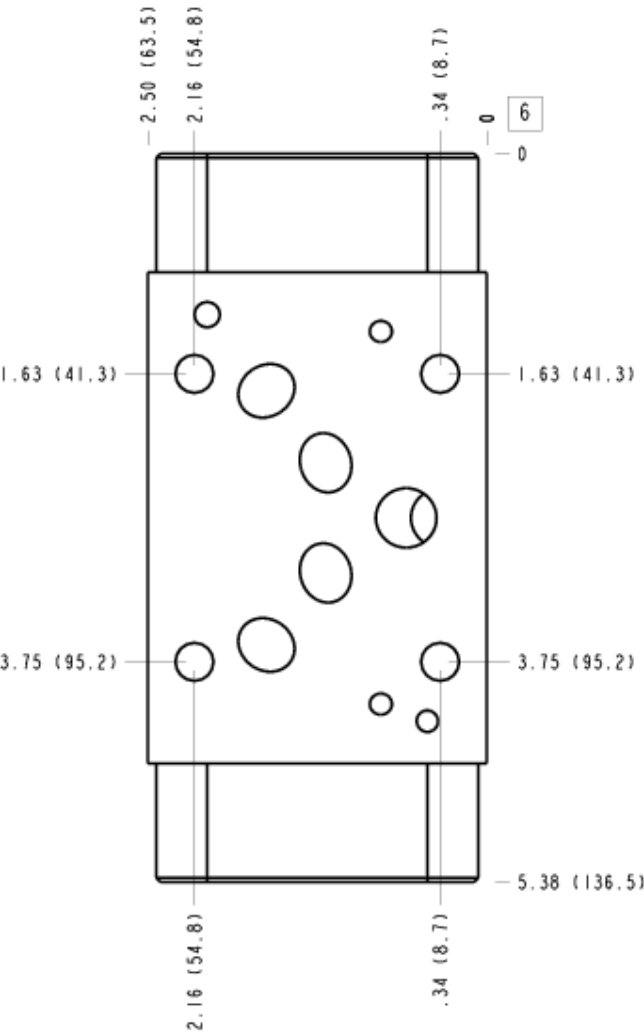

Face 7

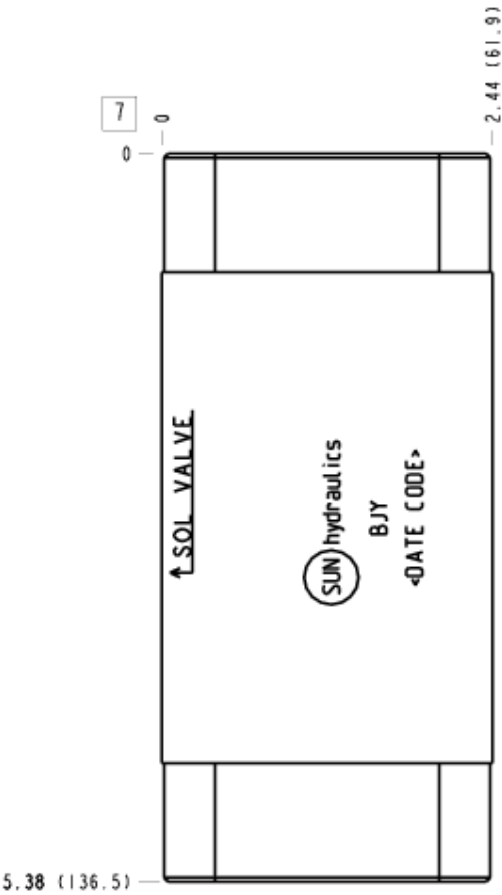

Face 8

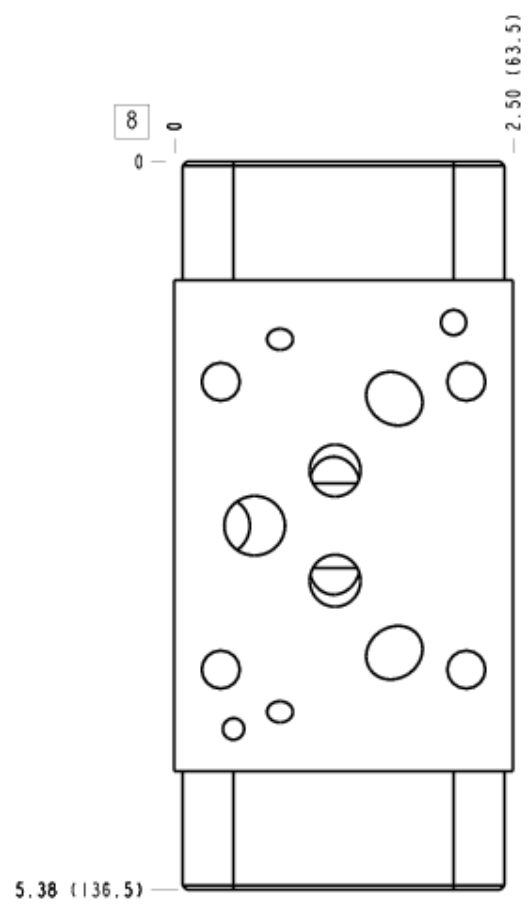

Face 10

