


37° - FLARED TUBE CONNECTORS

102209

Connector swivel female JIC - male Metric with O.R. and retaining ring ISO 9974 ports

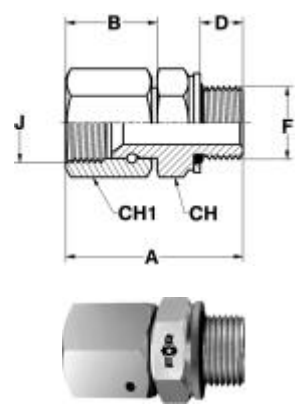

T		RIFERIMENTO REFERENCE	J	F	A	B	D	CH	CH ₁
MM.	IN.								
6	1/4	A102209-0610	7/16-20 UNF-2A	M10x1-6g	35,5	18,5	8,5	14	14
6	1/4	A102209-0612	7/16-20 UNF-2A	M12x1,5-6g	37,5	18,5	9,5	17	14
8	5/16	A102209-0810	1/2-20 UNF-2A	M10x1-6g	37,5	20,5	8,5	14	17
8	5/16	A102209-0812	1/2-20 UNF-2A	M12x1,5-6g	40	20,5	9,5	17	17
8	5/16	A102209-0814	1/2-20 UNF-2A	M14x1,5-6g	40	20,5	9,5	19	17
10	3/8	A102209-1014	9/16-18 UNF-2A	M14x1,5-6g	41	21,5	9,5	19	17
10	3/8	A102209-1016	9/16-18 UNF-2A	M16x1,5-6g	42,5	21,5	11	22	17
12	1/2	A102209-1216	3/4-16 UNF-2A	M16x1,5-6g	44	23	11	22	22
12	1/2	A102209-1218	3/4-16 UNF-2A	M18x1,5-6g	46	23	12,5	24	22
14÷16	5/8	A102209-1618	7/8-14 UNF-2A	M18x1,5-6g	49	26	12,5	24	27
14÷16	5/8	A102209-1620	7/8-14 UNF-2A	M20x1,5-6g	49,5	26	12,5	27	27
14÷16	5/8	A102209-1622	7/8-14 UNF-2A	M22x1,5-6g	52	26	13,5	27	27
18-20	3/4	A102209-2022	1"1/16-12 UN-2A	M22x1,5-6g	53,5	27,5	13,5	27	32
18-20	3/4	A102209-2027	1"1/16-12 UN-2A	M27x2-6g	57,5	27,5	16,5	32	32
22	7/8	A102209-2226	1"3/16-12 UN-2A	M26x1,5-6g	57	29	14	36	36
25	1"	A102209-2527	1"5/16-12 UN-2A	M27x2-6g	60	30	16,5	32	38
25	1"	A102209-2533	1"5/16-12 UN-2A	M33x2-6g	62	30	16,5	41	38
30-32	1"1/4	A102209-3242	1"5/8-12 UN-2A	M42x2-6g	66	32,5	17	50	50
38	1"1/2	A102209-3848	1"7/8-12 UN-2A	M48x2-6g	76	38	19,5	55	57
8	5/16	SA102209-0818	1/2-20 UNF-2A	M18x1,5-6g	44,5	20,5	12,5	24	17
10	3/8	SA102209-1018	9/16-18 UNF-2A	M18x1,5-6g	45,5	21,5	12,5	24	17
18-20	3/4	SA102209-2020	1"1/16-12 UN-2A	M20x1,5-6g	52,5	27,5	12,5	27	32

FOR S.P.A. - NORME E DIMENSIONI SOGGETTE A MODIFICHE SENZA PREAVVISO.
FOR S.P.A. - DESIGN DETAILS AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.