



KITS



PUMPS



METERS



METERED NOZZLES



NOZZLES



WASTE OIL EQUIPMENTS

ST

FEATURES

- RAY TO USE
- EASY TO INSTALL
- STURDY STRUCTURE
- COMPACT DESIGN
- AVAILABLE WITH DIFFERENT PUMPS

The PIUSI ST is a versatile and compact diesel transfer station that can be used to fill mobile tanks or interact with distribution units. It is fitted with check valve, filter, nozzle and 4mt delivery hose. Its sturdy structure makes this dispenser suitable to be used in the harshest environments. It can be integrated with a protective metal box and water separating filter.

PERFORMANCE

UP TO

30 L/MIN

FLOW RATE

AC/DC


VOLTAGE

POWER

4MT

LENGTH

DELIVERY HOSE

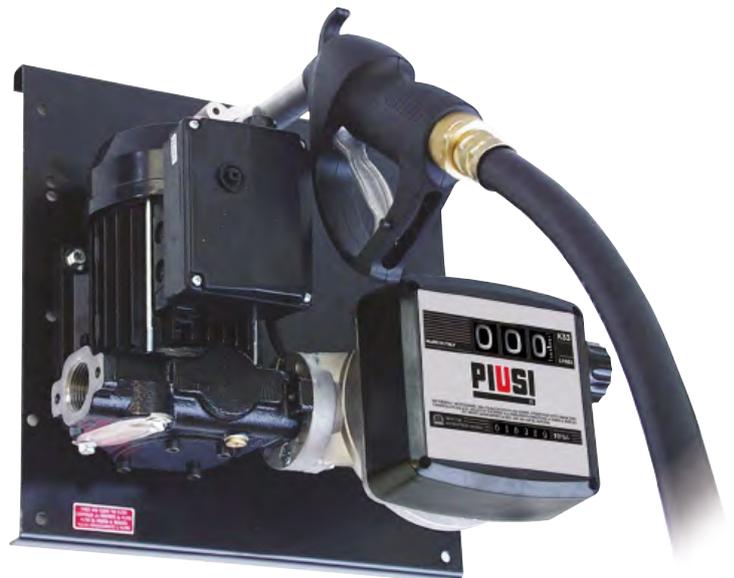

PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
00024800B	20	44	357X357X275	14,1X14,1X10,8	1
000256000	10	22	357X357X275	14,1X14,1X10,8	1



FILTRATION



FLUID MONITORING



TANK MONITORING



HOSE REELS



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER



WINDSCREEN

COMPONENTS



VISCOMAT VANE



SELF 3000



K33

IN THE BOX

- ST UNIT
- DELIVERY HOSE
- NOZZLE
- NOZZLE HOLDER
- INSTRUCTION MANUAL

DETAILS




SELF 3000



K33

DIMENSIONS

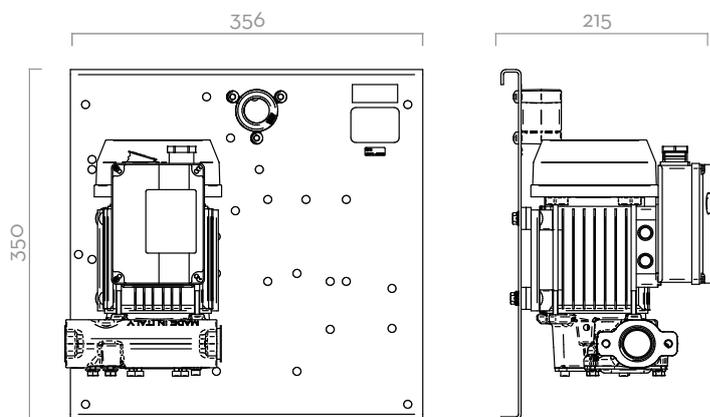

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			METER	NOZZLE	FILTER	DELIVERY HOSE		OUTLET	
			L/MIN	GPM	AC V/ HZ	DC VOLT	POWER WATT				AMP. MAX.	TYPE	LENGTH	Ø
00024800B	ST VISCOMAT 70		30	8	230/50	950	4,6	NO	MAN.	NO	4M	1"	1"	
000256000	ST VISCOMAT 70/M K33		30	8	230/50	950	4,6	K33	MAN.	NO	4M	1"	1"	