


BSP MBSP

Male BSP Parallel. 60° inverted cone.

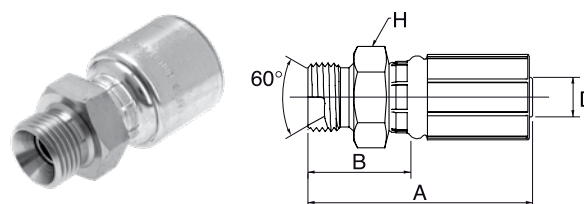

D				A	B	H1	REF.
-size	DN	"		mm	mm	mm	G
-4	6	1/4	G 1/4" - 19 BSP	51.9	25.9	19.0	4G4MBSP
-4	6	1/4	G 3/8" - 19 BSP	53.8	27.8	22.0	4G6MBSP
-4	6	1/4	G 1/2" - 14 BSP	55.9	29.9	27.0	4G8MBSP
-5	8	5/16	G 1/4" - 19 BSP	49.4	25.5	19.0	5G4MBSP
-5	8	5/16	G 3/8" - 19 BSP	49.7	25.8	22.0	5G6MBSP
-6	10	3/8	G 1/4" - 19 BSP	54.0	26.1	19.0	6G4MBSP
-6	10	3/8	G 3/8" - 19 BSP	56.0	28.1	22.0	6G6MBSP
-6	10	3/8	G 1/2" - 14 BSP	58.0	30.1	27.0	6G8MBSP
-8	12	1/2	G 3/8" - 19 BSP	65.5	28.0	22.0	8G6MBSP
-8	12	1/2	G 1/2" - 14 BSP	71.5	34.0	27.0	8G8MBSP
-8	12	1/2	G 5/8" - 14 BSP	68.5	31.0	30.0	8G10MBSP
-8	12	1/2	G 3/4" - 14 BSP	72.5	35.0	32.0	8G12MBSP
-10	16	5/8	G 5/8" - 14 BSP	72.0	34.5	30.0	10G10MBSP
-10	16	5/8	G 3/4" - 14 BSP	74.0	36.5	32.0	10G12MBSP
-12	20	3/4	G 3/4" - 14 BSP	90.0	39.0	32.0	12G12MBSP
-16	25	1	G 1" - 11 BSP	101.0	44.2	41.0	16G16MBSP
-20	32	1.1/4	G 1.1/4" - 11 BSP	110.0	51.0	50.0	20G20MBSP

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.