


# LIGHT RANGE

## Mild Steel Zinc Protected

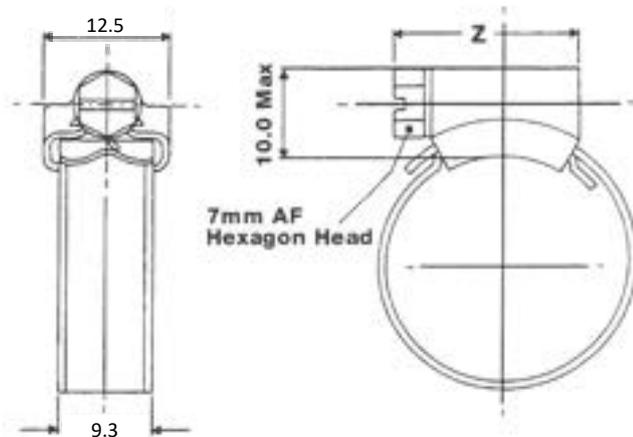

Part No.	Adjustment mm	Band Width mm	Band Thickness mm	Recommended Torque Nm	Maximum Torque Nm	Maximum Pressure PSI	Part No.
000MS	9.5-12	9.3	0.7	3.4	4.5	203	000MS
M00MS	11-16	9.3	0.7	3.4	4.5	203	M00MS
O0MS	13-20	9.3	0.7	3.4	4.5	203	O0MS
LR022MS	12-22	9.3	0.7	3.4	4.5	182	LR022MS
LR027MS	16-27	9.3	0.7	3.4	4.5	182	LR027MS
LR032MS	20-32	9.3	0.7	3.4	4.5	92	LR032MS
LR040MS	25-40	9.3	0.7	4.5	6.0	92	LR040MS
LR045MS	30-45	9.3	0.7	4.5	6.0	92	LR045MS
LR050MS	32-50	9.3	0.7	4.5	6.0	92	LR050MS
LR060MS	40-60	9.3	0.7	4.5	6.0	92	LR060MS
LR070MS	50-70	9.3	0.7	4.5	6.0	92	LR070MS
LR080MS	60-80	9.3	0.7	4.5	6.0	39	LR080MS
LR090MS	70-90	9.3	0.7	4.5	6.0	39	LR090MS
LR100MS	80-100	9.3	0.7	4.5	6.0	39	LR100MS
LR110MS	90-110	9.3	0.7	4.5	6.0	39	LR110MS
LR120MS	100-120	9.3	0.7	4.5	6.0	39	LR120MS
LR130MS	110-130	9.3	0.7	4.5	6.0	39	LR130MS
LR140MS	120-140	9.3	0.7	4.5	6.0	39	LR140MS
LR150MS	130-150	9.3	0.7	4.5	6.0	17	LR150MS
LR160MS	140-160	9.3	0.7	4.5	6.0	17	LR160MS

### Quality Assurance



SAE J1508 Surface Vehicle Standards-Hose Clamp Specifications, Type FE is referenced in the quality control methods for the design/manufacture of Lightweight Range Jubilee Clips.

### Corrosion Resistance

240 hours NSS Test

### Fastening

7mm A/F screw

### Industry Recommendations



**Mild Steel Zinc Protected**