


PIPE SCREW JOINTS H EQUAL CROSSES

THE WORLD OF TUBE FITTINGS

H EQUAL CROSSES

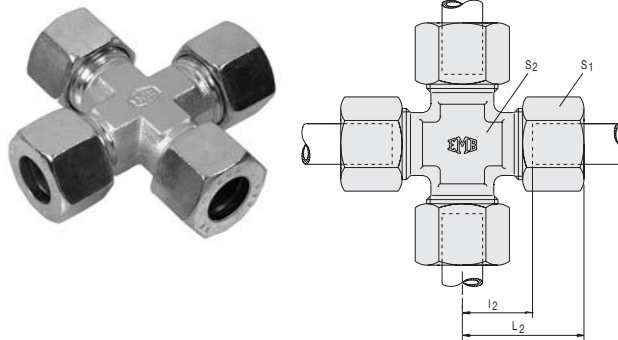

description	pipe OD	PN series	S ₁	S ₂	L ₂	l ₂	kg % pc
DS-H 6-L	6	L 500 (2200)	14	12	27	12.0	7.7
DS-H 8-L	8	L 500 (2200)	17	12	29	14.0	10.9
DS-H 10-L	10	L 500 (2200)	19	14	30	15.0	15.5
DS-H 12-L	12	L 400 (1700)	22	17	32	17.0	19.2
DS-H 15-L	15	L 400 (1700)	27	19	36	21.0	31.1
DS-H 18-L	18	L 400 (1700)	32	24	40	23.5	48.3
DS-H 22-L	22	L 250 (1100)	36	27	44	27.5	72.4
DS-H 28-L	28	L 250 (1100)	41	36	47	30.5	101.2
DS-H 35-L	35	L 250 (1100)	50	41	56	34.5	122.8
DS-H 42-L	42	L 250 (1100)	60	50	63	40.0	175.6
DS-H 6-S	6	S 800 (3400)	17	12	31	16.0	12.3
DS-H 8-S	8	S 800 (3400)	19	14	32	17.0	14.8
DS-H 10-S	10	S 800 (3400)	22	17	34	17.5	23.0
DS-H 12-S	12	S 630 (2700)	24	17	38	21.5	28.2
DS-H 14-S	14	S 630 (2700)	27	19	40	22.0	35.4
DS-H 16-S	16	S 630 (2700)	30	24	43	24.5	45.1
DS-H 20-S	20	S 400 (1700)	36	27	48	26.5	70.4
DS-H 25-S	25	S 400 (1700)	46	36	54	30.0	125.7
DS-H 30-S	30	S 400 (1700)	50	41	62	35.5	150.3
DS-H 38-S	38	S 400 (1700)	60	50	72	41.0	205.1

L₂ = approximate length with nut tightened

Please see "Engineering and technical data - Selecting the correct tube fitting" for more information on pressure.