


DIN EN 14420-7 Camlock Fittings
Camlock Unions AISI 316

Female Camlock coupling with serrated hose shank
Type C

Stainless Steel AISI 316

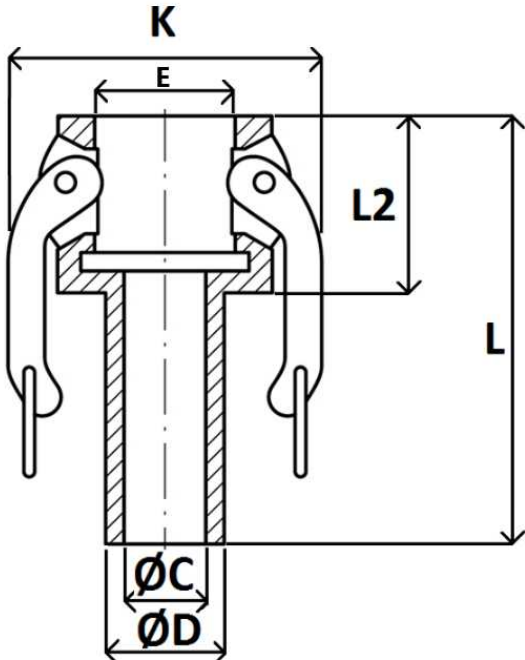

Norms: Male thread according to EN10226-1
Female thread according to ISO 228-1
PN: 1/2": 150 PSI --- 3/4"-2": 250 PSI --- 3": 125 PSI --- 4": 100 PSI

Part nº	DN	DN	L	L2	ØC	ØD	K	E
ZC012	1/2"	12	69	28	8,5	14	46	24.2
ZC015	1/2"	20	75,5	30	9,7	14	55,3	32.4
ZC020	3/4"	20	80	50	14,7	20,4	62,8	32.4
ZC025	1"	25	94	38,2	20,6	26,5	62,8	37.3
ZC032	1"1/4	32	106	44	27,5	33	78,5	46
ZC040	1"1/2	40	107	44	34	40	80	54
ZC050	2"	50	126	48,3	45	53	96	63.8
ZC065	2"1/2	65	122	52,2	53	66	104	76.5
ZC080	3"	80	152	53,4	66	78	130	92.2
ZC100	4"	100	175	62	92	103	158	120.3

The dimensions in micro-casting parts are approximated in those elements without mechanization.
NBR gasket