




Type M22



Umeta Button-Head Grease Fittings with plunger check

- head Ø 21.9 mm (7/8")
- according to SAE J-534
- straight version A/180°
- standard versions according to SAE are made of steel, hardened, zinc plated, passivated and top coated
- salt spray resistance > 72 hours

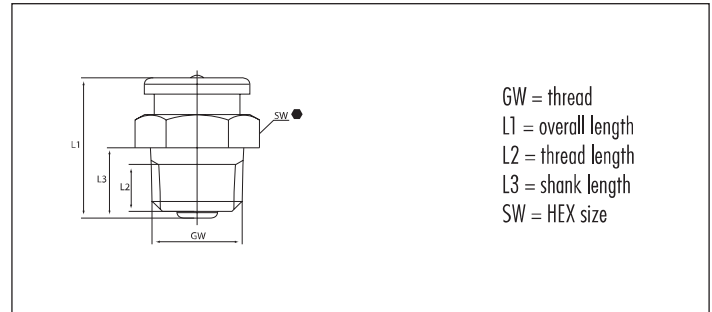

GW 1/2" N.PTF				Ref.- No.:		
L1	L2	L3	SW	Steel	SST303	Alemite
1 1/6"	25/64"	1/2"	7/8" HEX	● *5546120		1820-1


*with plunger check

UMETA ADAPTER (USA VERSION)

Adapters / elbow bodies



- elbow version 180°/45°/90°
- optionally available with square or hexagonal body
- standard version made of steel, according to SAE zinc plated, passivated and top coated
- salt spray resistance > 72 hours

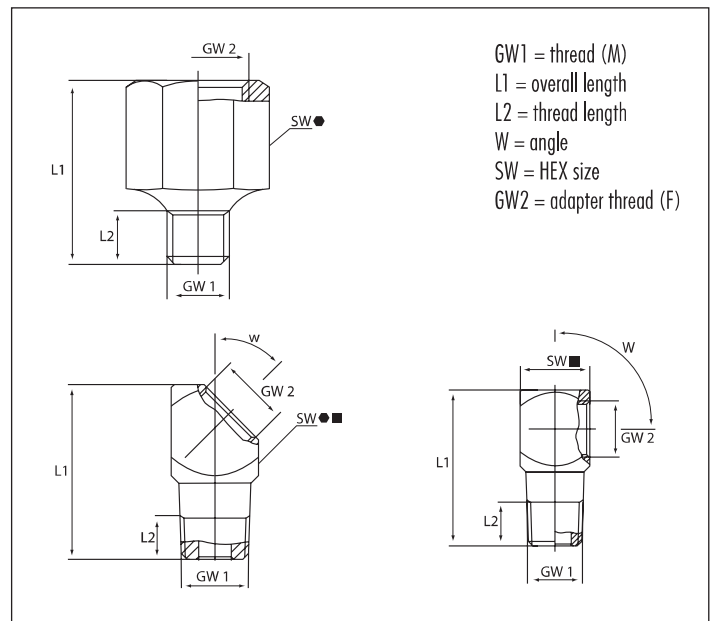

GW1 (M) 1/8" - 27 NPT/PTF					Ref.- No.:	
L1	L2	W	GW2 (F)	SW	Steel	Alemite
1"	7/32"	45°	1/8" - 27 NPT/PTF	1/2" SQ	■ 5546134	43716
1 1/8"	17/64"	90°	1/8" - 27 NPT/PTF	1/2" SQ	■ 5546132	43706

GW1 (M) 1/4" - 28 NF/UNF/SAE					Ref.- No.:	
L1	L2	W	GW2 (F)	SW	Steel	Alemite
3/4"	13/64"	180°	1/8"-NPTF	1/2" HEX	5546135	51942
13/16"	13/64"	45°	1/8"-NPTF	1/2" HEX	5546157	310912
1 1/32"	7/32"	90°	1/8"-NPTF	1/2" SQ	5546159	51943

UMETA GREASE FITTING ASSORTMENTS ACCORDING TO SAE J-534

UMETA's grease fitting assortments ensure you always have the right one available. The kits carry an assortment that should cover all application purposes.

Sort 110



- standard version according to SAE, made of steel, hardened, zinc plated, passivated and top coated
- salt spray resistance > 72 hours

Sort 110 consisting of:			6110100
Ref.- No.:	UMETA-Type	Alemite-Type	Steel Quantity
5546006	H1, 1/8" PTF, 11/16"	1610-BL	25
5546040	H2, 1/4" - 28 SAE-LT, 13/16"	1637-B1	15
5546024	H3, 1/8" PTF, 27/32"	1613-B	15
5546030	H1, 1/4" - 28 SAE-LT, 35/64"	1641-B	25
5546017	H2, 1/8" PTF, 57/64"	1688-B	15
5546044	H3, 1/4" - 28 SAE-LT, 3/4"	1911-B1	15
Total number of pieces			110