




Female JIC 37° Flare Swivel - 90° Bent Tube

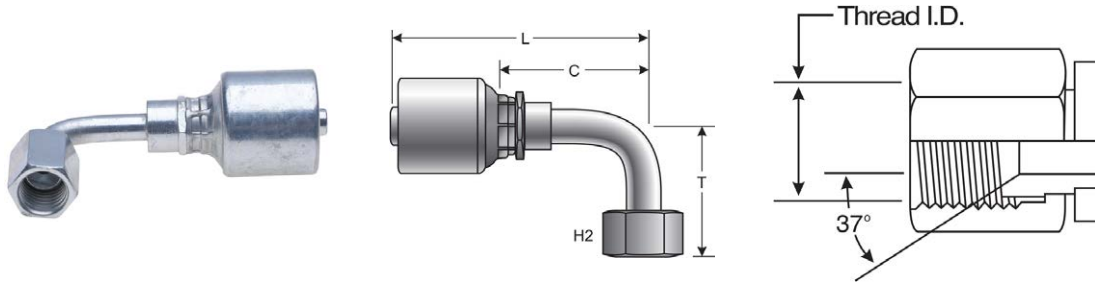

Part No.	Descr.	Prod. No.	⌀			H2	T		L		C	
			"	mm		mm	"	mm	"	mm	"	mm
G25179-0404	4G-4FJX90S	7103-47045	1/4	6.4	7/16-20	14	0.83	21.0	2.48	63.0	1.46	37.1
G25180-0404	4G-4FJX90M	7103-47055	1/4	6.4	7/16-20	14	1.26	32.0	2.48	63.0	1.46	37.1
G25181-0404	4G-4FJX90L	7103-47065	1/4	6.4	7/16-20	14	1.81	46.0	2.48	63.0	1.46	37.1
G25179-0405	4G-5FJX90-023	7103-47075	1/4	6.4	1/2-20	17	0.91	23.1	2.45	62.2	1.43	36.2
G25180-0405	4G-5FJX90M	7103-47095	1/4	6.4	1/2-20	17	1.26	32.0	2.25	57.2	1.23	31.2
G25181-0405	4G-5FJX90L	7103-47105	1/4	6.4	1/2-20	17	1.81	46.0	2.25	57.2	1.23	31.2
G25179-0406	4G-6FJX90S	7103-47125	1/4	6.4	9/16-18	19.1	0.91	23.1	2.80	71.1	1.78	45.1
G25180-0406	4G-6FJX90M	7103-47135	1/4	6.4	9/16-18	19.1	1.50	38.1	2.56	65.0	1.53	38.9
G25181-0406	4G-6FJX90L	7103-47145	1/4	6.4	9/16-18	19.1	2.13	54.1	2.73	69.3	1.70	43.2
G25179-0506	5G-6FJX90S	7103-47165	5/16	7.9	9/16-18	19.1	0.91	23.1	2.96	75.2	1.86	47.2
G25180-0506	5G-6FJX90M	7103-47175	5/16	7.9	9/16-18	19.1	1.50	38.1	2.99	76.0	1.89	48.0
G25179-0604	6G-4FJX90S	7103-47195	3/8	9.5	7/16-20	14	0.83	21.0	2.60	66.0	1.50	38.2
G25181-0604	6G-4FJX90L	7103-47635	3/8	9.5	7/16-20	14	1.81	46.0	2.37	60.2	1.27	32.3
G25179-0606	6G-6FJX90S	7103-47205	3/8	9.5	9/16-18	19.1	0.91	23.1	3.09	78.6	1.99	50.6
G25180-0606	6G-6FJX90M	7103-47215	3/8	9.5	9/16-18	19.1	1.50	38.1	3.01	76.5	1.91	48.5
G25181-0606	6G-6FJX90L	7103-47225	3/8	9.5	9/16-18	19.1	2.13	54.1	2.78	70.6	1.68	42.7
G25179-0608	6G-8FJX90S	7103-47245	3/8	9.5	3/4-16	24.1	1.14	29.0	3.18	80.7	2.08	52.8
G25180-0608	6G-8FJX90M	7103-47255	3/8	9.5	3/4-16	24.1	1.61	40.9	3.31	84.1	2.21	56.2
G25181-0608	6G-8FJX90L	7103-47265	3/8	9.5	3/4-16	24.1	2.52	64.0	3.33	84.5	2.23	56.6
G25180-0610	6G-10FJX90M	7103-47235	3/8	9.5	7/8-14	26.9	1.85	47.0	3.25	82.5	2.15	54.6
G25179-0810	8G-10FJX90S	7103-47325	1/2	12.7	7/8-14	26.9	1.26	32.0	3.67	93.2	2.20	55.8
G25179-0806	8G-6FJX90S	7103-47275	1/2	12.7	9/16-18	19.1	0.91	23.1	3.53	89.7	2.05	52.1
G25179-0808	8G-8FJX90S	7103-47285	1/2	12.7	3/4-16	24.1	1.14	29.0	3.19	81.0	1.71	43.5
G25180-0808	8G-8FJX90M	7103-47295	1/2	12.7	3/4-16	24.1	1.61	40.9	3.04	77.3	1.57	39.9
G25180-0808T	8G-8FJX90M-TCX*	7321-51735	1/2	12.7	3/4-16	24.1	1.61	40.9	3.04	77.2	1.57	39.9
G25181-0808	8G-8FJX90L	7103-47305	1/2	12.7	3/4-16	24.1	2.52	64.0	3.04	77.3	1.57	39.9
G25180-0810	8G-10FJX90M	7103-47335	1/2	12.7	7/8-14	26.9	1.85	47.0	3.67	93.2	2.20	55.8
G25181-0810	8G-10FJX90L	7103-47345	1/2	12.7	7/8-14	26.9	2.76	70.1	3.67	93.2	2.20	55.8
G25179-0812	8G-12FJX90S	7103-47355	1/2	12.7	1 1/16-12	32	1.89	48.0	4.28	108.7	2.80	71.1
G25179-1010	10G-10FJX90-036	7103-47675	5/8	15.9	7/8-14	26.9	1.42	36.1	3.50	88.9	2.03	51.5
G25180-1010	10G-10FJX90M	7103-47375	5/8	15.9	7/8-14	26.9	1.85	47.0	3.68	93.4	2.20	55.9
G25180-1010T	10G-10FJX90M-TCX*	7321-51745	5/8	15.9	7/8-14	26.9	1.85	47.0	3.63	92.2	2.20	55.9
G25181-1010	10G-10FJX90L	7103-47385	5/8	15.9	7/8-14	26.9	2.76	70.1	3.38	85.9	1.91	48.4
G25179-1012	10G-12FJX90S	7103-47405	5/8	15.9	1 1/16-12	32	1.89	48.0	4.22	107.3	2.70	68.6
G25180-1012	10G-12FJX90M	7103-47415	5/8	15.9	1 1/16-12	32	2.28	57.9	4.03	102.3	2.52	64.0
G25181-1012	10G-12FJX90L	7103-47425	5/8	15.9	1 1/16-12	32	3.78	96.0	4.56	115.7	3.11	79.0
G25180-1210	12G-10FJX90M	7103-47435	3/4	19.1	7/8-14	26.9	1.85	47.0	4.49	114.0	2.48	63.0
G25179-1212	12G-12FJX90S	7103-47445	3/4	19.1	1 1/16-12	32	1.89	48.0	4.82	122.4	2.81	71.4

*TuffCoat Xtreme™ Plating

Parts Continued On Next Page

HOSE/CPLG.
SELECTION

EQUIPMENT

HOSE
SPECIFICATIONGLOBAL SPIRAL
COUPLINGSSTAINLESS
STEEL SPIRAL
COUPLINGSMEGACRIMP
COUPLINGSSTAINLESS
STEEL BRAID
COUPLINGSPOWER CRIMP
COUPLINGSFIELD
ATTACHABLE -
TYPE T
COUPLINGSFIELD
ATTACHABLE - C5
COUPLINGSFIELD
ATTACHABLE -
LOCK-ON
COUPLINGSC14 COUPLINGS
& ASSEMBLIESGLP & GL
COUPLINGS

GLX COUPLINGS

PCTS
THERMOPLASTIC
COUPLINGSPOLARSEAL
COUPLINGS
(ACA, ACB, ACC)POWER
STEERING
CPLGS. & TOC
ASSEMBLIES

ADAPTERS

QUICK
DISCONNECT
COUPLINGS

BALL VALVES

LIVE SWIVELS

ACCESSORIES

AIR BRAKE
CPLGS. &
ASSEMBLIES

KITS

BRASS

HOSE/CPLG. SELECTION
EQUIPMENT
HOSE SPECIFICATION
GLOBAL SPIRAL COUPLINGS
STAINLESS STEEL SPIRAL COUPLINGS
MEGACRIMP COUPLINGS
STAINLESS STEEL BRAID COUPLINGS
POWER CRIMP COUPLINGS
FIELD ATTACHABLE - TYPE T COUPLINGS
FIELD ATTACHABLE - C5 COUPLINGS
FIELD ATTACHABLE - LOCK-ON COUPLINGS
C14 COUPLINGS & ASSEMBLIES
GLP & GL COUPLINGS
GLX COUPLINGS
PCTS THERMOPLASTIC COUPLINGS
POLARSEAL COUPLINGS (ACA, ACB, ACC)
POWER STEERING CPLGS. & TOC ASSEMBLIES
ADAPTERS
QUICK DISCONNECT COUPLINGS
BALL VALVES
LIVE SWIVELS
ACCESSORIES
AIR BRAKE CPLGS. & ASSEMBLIES
KITS
BRASS


MEGACRIMP™ COUPLINGS



Female JIC 37° Flare Swivel - 90° Bent Tube - Continued

Part No.	Descr.	Prod. No.	⊖			H2	T		L		C	
			"	mm		mm	"	mm	"	mm	"	mm
G25180-1212	12G-12FJX90M	7103-47455	3/4	19.1	1 1/16-12	32	2.28	57.9	4.82	122.4	2.81	71.4
G25181-1212	12G-12FJX90L	7103-47465	3/4	19.1	1 1/16-12	32	3.78	96.0	4.82	122.4	2.81	71.4
G25179-1214	12G-14FJX90-054	7103-47615	3/4	19.1	1 3/16-12	36.1	2.13	54.1	4.88	124.0	2.87	72.9
G25179-1216	12G-16FJX90S	7103-47475	3/4	19.1	1 5/16-12	40.9	2.21	56.1	5.22	132.7	3.22	81.7
G25180-1216	12G-16FJX90M	7103-47515	3/4	19.1	1 5/16-12	40.9	2.80	71.1	4.78	121.3	2.77	70.3
G25179-1616	16G-16FJX90S	7103-47485	1	25.4	1 5/16-12	40.9	2.21	56.1	5.73	145.6	3.50	88.8
G25180-1616	16G-16FJX90M	7103-47495	1	25.4	1 5/16-12	40.9	2.80	71.1	4.73	120.1	2.50	63.5
G25181-1616	16G-16FJX90L	7103-47505	1	25.4	1 5/16-12	40.9	4.49	114.0	4.74	120.3	2.50	63.5
G25179-1620	16G-20FJX90S	7103-47535	1	25.4	1 5/8-12	50	2.52	64.0	6.18	157.0	3.95	100.2
G25180-2020	20G-20FJX90M	7103-47575	1 1/4	31.8	1 5/8-12	50	3.07	78.0	6.26	159.0	3.94	100.0
G25181-2020	20G-20FJX90L	7103-47585	1 1/4	31.8	1 5/8-12	50	5.08	129.0	6.22	158.0	3.90	99.1
G25183-2020	20G-20FJX90-089	7103-47595	1 1/4	31.8	1 5/8-12	50	3.50	88.9	6.21	157.8	3.89	98.8

Male SAE 45° Flare

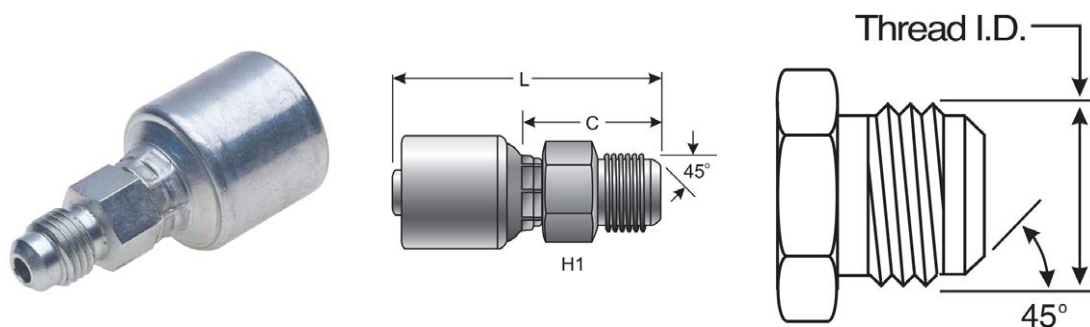

Part No.	Descr.	Prod. No.	⊖			H1	L		C	
			"	mm		"	"	mm	"	mm
G25195-0404	4G-4MS	7100-11815	1/4	6.4	7/16-20	1/2	2.50	63.5	1.08	27.5
G25195-0606	6G-6MS	7100-11835	3/8	9.5	5/8-18	5/8	2.38	60.5	1.28	32.5
G25195-0808	8G-8MS	7100-01855	1/2	12.7	3/4-16	13/16	2.89	73.5	1.42	36.1
G25195-1212	12G-12MS	7100-01875	3/4	19.1	1 1/16-14	1 1/16	3.78	96.0	1.77	45.0