

Description **Item No.**

High Pressure Safety Rubber Hose 300 mm with hook-on coupler for button head fittings

- RH-30SK16, 300 mm with SK-16, M10x1 32 566 78
- RH-30SK16, 300 mm with SK-16, R1/8" 32 566 92





High Pressure Safety Rubber Hose 300 mm with snap-on coupler and 4-jaw hydr. coupler

- RH-30CC with 4-jaw hydr. coupler 32 540 49



Important Safety Advice: Do never point parts which are under high pressure at individuals, animals or other objects! MATO quality lubrication equipment can reach hydraulic pressure rates of up to 1.000 bar (14.450 psi). For safety reasons we strongly recommend the use of our high pressure rubber hose assemblies (double steel wire reinforced) with a burst pressure of 1.650 bar (23.800 psi). Do not bend or twist hoses by force! The min. bend radius is 50 mm. Prior to use, check hoses carefully for traces of wear or leakage and replace items in case they appear damaged. Both nylon and rubber hoses are subject to the effects of ageing, replace hoses after a period of three years. Do never use pliers or pipe grips in the area of the end fitting, use spanners or wrenches of the correct size on the hexagonal end fittings only.

General advice: Use original MATO accessories to avoid unnecessary risks or injuries! We recommend our steel wire reinforced MATO high pressure safety rubber hoses.

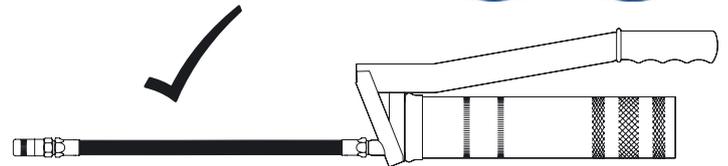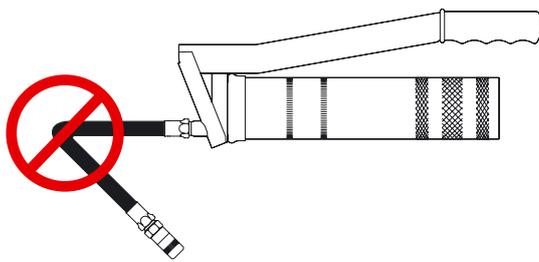

Lubrication Accessories

Description **Item-No.**

Swivel Joint

- straight swivel, M10x1 32 425 10
- straight swivel, R1/8" 32 425 34



Angled Adaptor eco for 4-jaw hydraulic coupler

For simple and secure conversion of direction of a 4-jaw hydraulic coupler to a 90 degree angle. Lubricate even in confined spaces.

- angled adaptor eco, M10x1 32 450 09
- angled adaptor eco, R1/8" 32 450 30



Angled Adaptor deluxe with Straight Swivel for 4-jaw hydraulic coupler

The straight swivel always warrants the correct working position of the 4-jaw hydraulic coupler.

- angled adaptor deluxe, M10x1 32 451 08
- angled adaptor deluxe, R1/8" 32 451 46



Description

Item No.

Filler Nipple / Air Venting Valve

for side lever and one hand grease guns, Accu-Greaser and one-hand air operated grease gun

combined filler nipple/air venting valve \varnothing 9 mm - DIN 1283	30 990 60
conical filler nipple (Suisse type)	30 991 07
giant filler nipple, \varnothing 15 mm	30 992 06
plug screw M10x1	30 991 21



Pressure Relief Valve for Grease Guns

Ideal for use in confined spaces where disconnection of the grease gun coupler is difficult. After the relief valve is opened and the pressure is reduced, the 4-jaw hydraulic coupler can be detached from the grease fitting with ease
 - safe method of disconnection from the grease fitting
 - extended lifetime for the 4-jaw hydraulic coupler

Pressure relief valve, M10x1	32 453 20
Pressure relief valve, R1/8"	32 453 44



Flow Indicator for Grease Guns

for easy, safe and reliable monitoring of the grease flow. An internal magnet, driven forward by the grease flow, moves a steel indicator-ball to show grease movement. **Please note the flow direction!**

Flow indicator for grease guns, M10x1	35 416 68
Flow indicator for grease guns, R1/8"	35 416 82



Spring for one hand grease gun

for TG500, Lube-Shuttle® TG and TG-LS500

Spring for one hand grease gun	30 920 16
--------------------------------	-----------



Fixing Clip for Grease Guns

and other devices with a tube of \varnothing 56 mm
 suitable for universal attachment to the workplace

Fixing clip for grease guns	32 460 75
-----------------------------	-----------



Fixing Clip for Grease Guns with Magnetic Bracket

with magnetic bracket (permanent magnet)
 for grease guns and other devices with a tube diameter of \varnothing 56 mm
 suitable for universal attachment on magnetic surfaces

Fixing clip for grease guns with magnetic bracket	32 460 44
---	-----------



Description **Item No.**

High Pressure Nylon Hoses

multiple braid, high pressure nylon hose \varnothing 9 mm, hexagonal end fittings for safe connection to grease gun

burst pressure 1.000 bar (14.450 psi)

PoS-design retail package with paper-headcard

PH-30, 300 mm, M10x1 - DIN 1283		32 531 03
PH-30, 300 mm, R1/8"		32 531 27

High Pressure Nylon Hoses

with 4-jaw hydraulic coupler

nylon hose **as seen above**, but includes 4-jaw hydraulic coupler (machined and hardened jaws)

PH-30C, 300 mm, M10x1 - DIN 1283		32 542 16
PH-30C, 300 mm, R1/8"		32 542 30

High Pressure Safety Rubber Hoses

high pressure safety rubber hose \varnothing 13 mm, steel wire reinforced, hexagonal end fittings for safe connection to grease gun

burst pressure 1.650 bar (23.900 psi)

PoS-design retail package with paper-headcard

RH-30, 300 mm, M10x1 - DIN 1283		32 565 31
RH-30, 300 mm, R1/8"		32 565 48

High Pressure Safety Rubber Hoses

with 4-jaw hydraulic coupler

high pressure safety rubber hose **as seen above**, but includes 4-jaw hydraulic coupler (machined and hardened jaws)

RH-30C, 300 mm, M10x1 - DIN 1283		32 565 79
RH-30C, 300 mm, R1/8"		32 565 86

Grease Gun Accessories Set, 5 pcs.

includes: high pressure nylon hose PH-30 or safety rubber hose RH-30, 4-jaw hydraulic coupler, angled delivery tube 150 mm, universal coupler for H and K grease fittings, pointed coupler for D fittings

packed together with HEAD card hanger

with PH-30C M10x1	32 600 40
with PH-30C R1/8"	32 600 64
with RH-30C M10x1	32 601 49
with RH-30C R1/8"	32 601 63



Description

Item No.

E4024 Angled Delivery Tube 150 mm
with 4-jaw hydraulic connector

PoS-design retail package with paper-headcard

E4024, M10x1



32 426 02

E4024, R1/8"

32 426 26



Straight Delivery Tube 150 mm
with 4-jaw hydraulic connector

PoS-design retail package with paper-headcard

straight delivery tube, M10x1



32 427 01

straight delivery tube, R1/8"

32 427 25



Lubrication Accessories Kit

This lubrication accessories kit is a professional supplement to your lubrication equipment. By means of a quick-coupler the accessories can rapidly be at- and detached to and from the outlet of your grease applicator. A quick on-site adaption to the different shapes of greasing points and fittings.

The kit includes

- rigid pipe with conical- and universal coupler
- hook on couplers sizes SK10, SK16, SK22
- Lube injector D
- extension F4020 for drive-shafts
- ISO 7241 B coupler for centralised lubrication reservoirs
- 300 mm safety rubber hose with safeLOCK coupler
- spare 4-jaw coupler, pointed coupler
- a cavity for a spare 400 gr. grease cartridge (cartridge not included)



Lubrication Accessories Kit

32 470 03

MATO 4-Jaw Hydraulic Coupler

Heavy duty quality coupler, DIN 1283, for grease fittings DIN 71412, with machined and hardened jaws for optimal sealing and long lifetime, hexagon 15 mm

2 pcs in PoS-design retail blister-pack

M10x1



32 443 23

R1/8"

32 443 30



Description

Item No.

Hook-on Couplers

for button head fittings

hook-on couplers made of steel with metallic seal for maximum load and durability

2 pcs. in PoS-design retail blister-pack

SK-10M10, (M10x1 / 10 mm)



32 410 18

SK-10R8, (R1/8" / 10 mm)

32 410 32

SK-16M10, (M10x1 / 16 mm)



32 416 12

SK-16R8, (R1/8" / 16 mm)

32 416 43



Grease Gun Couplers

2 pcs. in PoS-design retail blister-pack

conical couplers, M10x1



32 400 35

conical couplers, R1/8"

32 400 11

pointed couplers, M10x1, 2-teilig



32 399 09

pointed couplers, R1/8", 2-teilig

32 399 23

universal couplers, M10x1



32 398 00

universal couplers, R1/8"

32 398 24



Grease Gun Coupler Set, 4 pcs

Grease Gun Coupler Set includes:

- 4-Jaw Hydraulic Coupler
- Conical coupler
- Pointed coupler
- Universal coupler

M10x1



32 448 04

R1/8"

32 448 28

