


**DIN 24° MDH**

Male DIN parallel. 24° inverted cone.

Heavy series.

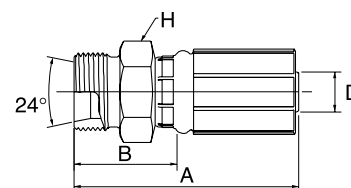


| D     |    |       |           | A    | B    | H    | REF.     |
|-------|----|-------|-----------|------|------|------|----------|
| -size | DN | "     |           | mm   | mm   | mm   | G        |
| -4    | 6  | 1/4   | M14 x 1.5 | 50.8 | 24.8 | 14.0 | 4G6MDH   |
| -4    | 6  | 1/4   | M16 x 1.5 | 53.0 | 27.0 | 17.0 | 4G8MDH   |
| -4    | 6  | 1/4   | M18 x 1.5 | 52.5 | 26.5 | 19.0 | 4G10MDH  |
| -5    | 8  | 5/16  | M18 x 1.5 | 49.7 | 25.8 | 19.0 | 5G10MDH  |
| -5    | 8  | 5/16  | M20 x 1.5 | 51.9 | 27.8 | 22.0 | 5G12MDH  |
| -6    | 10 | 3/8   | M18 x 1.5 | 55.0 | 27.1 | 19.0 | 6G10MDH  |
| -6    | 10 | 3/8   | M20 x 1.5 | 57.5 | 29.6 | 24.0 | 6G12MDH  |
| -6    | 10 | 3/8   | M22 x 1.5 | 59.5 | 31.6 | 24.0 | 6G14MDH  |
| -8    | 12 | 1/2   | M20 x 1.5 | 66.5 | 29.0 | 24.0 | 8G12MDH  |
| -8    | 12 | 1/2   | M22 x 1.5 | 68.0 | 30.5 | 24.0 | 8G14MDH  |
| -8    | 12 | 1/2   | M24 x 1.5 | 69.0 | 31.5 | 27.0 | 8G16MDH  |
| -8    | 12 | 1/2   | M30 x 2.0 | 72.5 | 35.0 | 32.0 | 8G20MDH  |
| -10   | 16 | 5/8   | M24 x 1.5 | 69.0 | 31.5 | 27.0 | 10G16MDH |
| -10   | 16 | 5/8   | M30 x 2.0 | 73.0 | 35.5 | 32.0 | 10G20MDH |
| -12   | 20 | 3/4   | M30 x 2.0 | 87.0 | 36.0 | 32.0 | 12G20MDH |
| -12   | 20 | 3/4   | M36 x 2.0 | 91.0 | 40.0 | 41.0 | 12G25MDH |
| -16   | 25 | 1     | M36 x 2.0 | 86.3 | 40.4 | 41.0 | 16G25MDH |
| -16   | 25 | 1     | M42 x 2.0 | 88.3 | 42.4 | 46.0 | 16G30MDH |
| -20   | 32 | 1.1/4 | M52 X 2.0 | 94.4 | 49.1 | 55.0 | 20G38MDH |

**DIN 24° MDH180**

Male DIN parallel. 24° inverted cone.

Heavy series. 180° swept elbow.

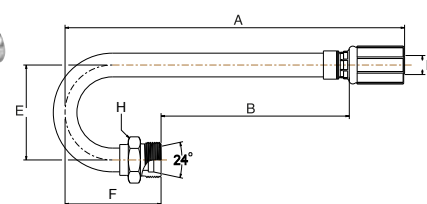

| D     |    |     |           | A     | B     | E    | F    | H    | REF.           |
|-------|----|-----|-----------|-------|-------|------|------|------|----------------|
| -size | DN | "   |           | mm    | mm    | mm   | mm   | mm   | G              |
| -8    | 12 | 1/2 | M24 x 1.5 | 165.0 | 127.5 | 64.0 | 65.0 | 27.0 | 8G16MDH180-110 |

-8: MWP 24.5 MPa (3500 psi).

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.