


COUPLINGS FOR WIRE SPIRAL HYDRAULIC HOSES GLOBALSPIRAL

SAE FLH90L

SAE 'O' ring flange high-pressure. Code 62.
90° swept elbow. Long drop.

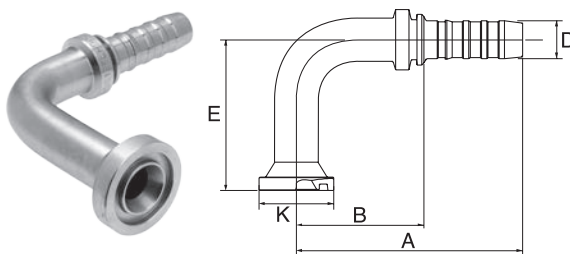


D				A	B	E	K	KIT	KIT	REF.
-size	DN	"		mm	mm	mm	mm			GS
-12	20	3/4	3/4"	112.0	61.0	100.0	41.3	12 PH-FLH	12FLHCFM	12GS12FLH90-100
-16	25	1	1"	135.0	78.2	100.0	47.6	16 PH-FLH	16FLHCFM	16GS16FLH90-100
-16	25	1	1"	134.0	77.6	120.0	47.6	16 PH-FLH	16FLHCFM	16GS16FLH90-120
-20	32	1.1/4	1"	160.0	88.9	100.0	47.6	16 PH-FLH		20GS16FLH90-100
-20	32	1.1/4	1.1/4"	165.0	93.9	120.0	54.0	20 PH-FLH		20GS20FLH90-120
-20	32	1.1/4	1.1/2"	169.0	97.9	150.0	63.5	24 PH-FLH	24FLHCFM	20GS24FLH90-150

Details on flange kits see page 292.

FLK


Komatsu type 'O' ring flange.

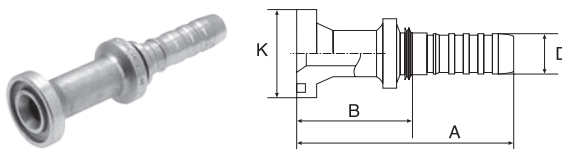

D				A	B	K	REF.
-size	DN	"		mm	mm	mm	GS
-8	12	1/2	5/8"	81.5	44.1	34.2	8GS10FLK
-10	16	5/8	5/8"	114.0	63.7	34.2	10GS10FLK
-12	20	3/4	5/8"	110.0	59.0	34.2	12GS10FLK

FLK45

Komatsu type 'O' ring flange.
45° swept elbow.

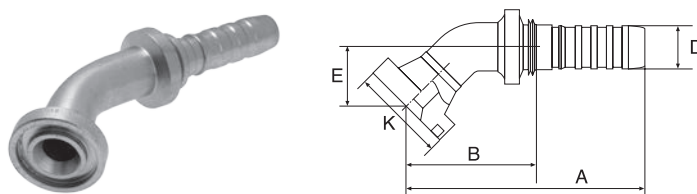

D				A	B	E	K	REF.
-size	DN	"		mm	mm	mm	mm	GS
-10	16	5/8	5/8"	121.0	70.7	26.0	34.2	10GS10FLK45-026

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.