
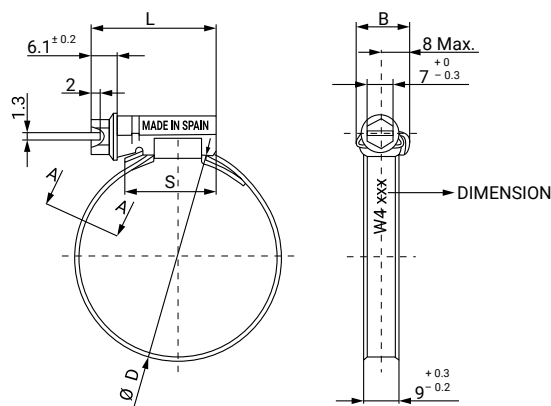




Thanks to the exclusive design of the housing and the high-strength screw, the ASFA L Worm-Drive Clip has excellent performance while being at the same time very compact.

The cold-formed stamped 9 mm band, smoothed on the underside, combined with the bevelled band edges protects the hose from any damage.

DIN 3017. The ASFA LW1 hose clip complies fully with the DIN 3017 norm and also with the directive EU 2002/95/EC.

MATERIAL: Band and support: W4
Stainless steel X5Cr Ni 18/10
DIN 1.4301 AISI 304
Bolt: Stainless steel
AISI 304 Cu

CORROSION RESISTANCE: 400 hours salt spray
(ASTM B-117)

Ø Application mm	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
8-12 (*)	03014000	18,5	0,40	9,2	11,5	15,0	15	200	1.600
8-16	03014019	22,1	0,65	10,5	14,0	15,0	45	200	800
12-22	03014027	22,1	0,65	10,5	14,0	15,0	45	200	800
16-27	03014035	23,6	0,75	10,5	14,0	16,5	42	200	800
20-32	03014043	23,6	0,75	10,5	14,0	16,5	36	200	800
25-40	03014051	25,6	0,75	10,5	14,0	17,1	32	100	400
30-45	03014060	25,6	0,75	10,5	14,0	17,1	28	100	800
32-50	03014078	25,6	0,75	10,5	14,0	17,1	24	100	800
40-60	03014086	25,6	0,75	10,5	14,0	17,1	19	100	400
50-70	03014094	29,6	0,75	10,5	14,0	21,1	17	100	100
60-80	03014107	29,6	0,75	10,5	14,0	21,1	15	100	100
70-90	03014115	29,6	0,75	10,5	14,0	21,1	13	50	400
80-100	03014123	29,6	0,75	10,5	14,0	21,1	11	50	50
90-110	03014140	29,6	0,75	10,5	14,0	21,1	10	25	200
100-120	03014158	29,6	0,75	10,5	14,0	21,1	9	25	200
110-130	03014166	29,6	0,75	10,5	14,0	21,1	8	25	25
120-140	03014174	29,6	0,75	10,5	14,0	21,1	7	25	200
130-150	03014182	29,6	0,75	10,5	14,0	21,1	6	25	25
140-160	03014190	29,6	0,75	10,5	14,0	21,1	5	25	25

(*) ASFA-L 7 mm