




Flow Control, Meter-In A

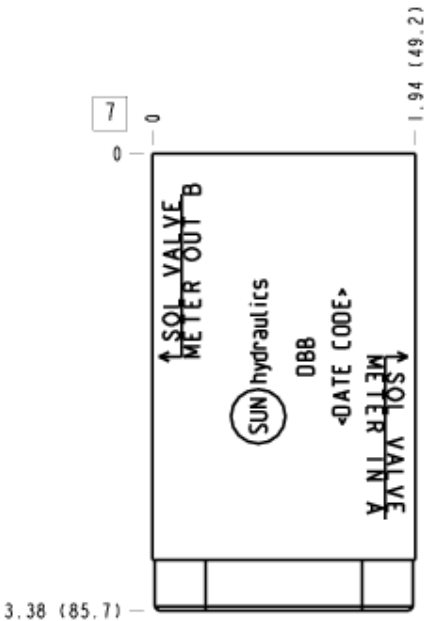

Flow Control, Meter-Out B



**TECHNICAL DATA**

|                                 |                                  |
|---------------------------------|----------------------------------|
| Body Type                       | Sandwich                         |
| Interface                       | ISO 05                           |
| Body Features                   | Flow into workport A or out of B |
| Stack Height                    | 1.99 in.                         |
| Seal Plate Included (see notes) | Yes                              |
| Open Cavities                   | 1                                |
| Cavity                          | T-5A                             |
| Model Weight                    | 1.38 lb.                         |

**NOTES**

- Stack height value in technical data table includes seal retainer plate.
- Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

INCLUDED COMPONENTS

| Part        | Description | Quantity |
|-------------|-------------|----------|
| 500-001-014 | O-Ring      | 5        |
| 700-001     | Seal Plate  | 1        |

CONFIGURATION OPTIONS

Model Code Example: DBB

MODIFIER


|                                                                                      |
|--------------------------------------------------------------------------------------|
| 6061-T651 Aluminum, Buna-N                                                           |
| /11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I  |
| /10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II |
| /V 6061-T651 Aluminum, Viton                                                         |
| /16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I   |
| /15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II  |
| /S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil                                     |
| /S4 65-45-12 Ductile Iron, Buna-N, Chem. Black                                       |
| /S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer              |
| /Y 65-45-12 Ductile Iron, Viton, Dewatering Oil                                      |
| /Y4 65-45-12 Ductile Iron, Viton, Chem. Black                                        |
| /Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer               |

MANIFOLD FACES


FACE GRID

|   |    |    |    |
|---|----|----|----|
| 1 | 2  | 3  | 4  |
| 5 | 6  | 7  | 8  |
| 9 | 10 | 11 | 12 |


Face 6

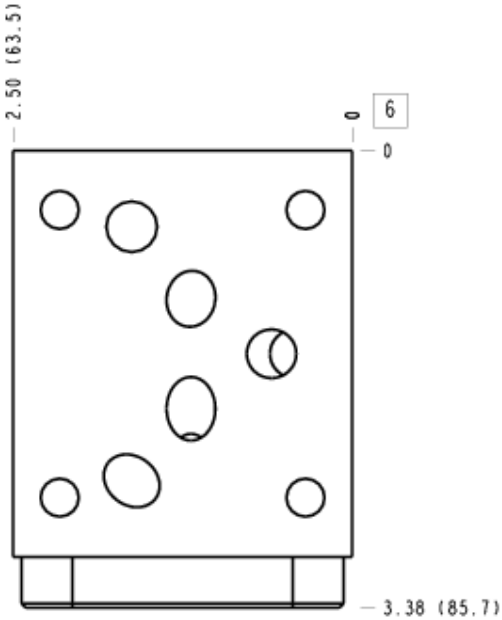

## Face 7

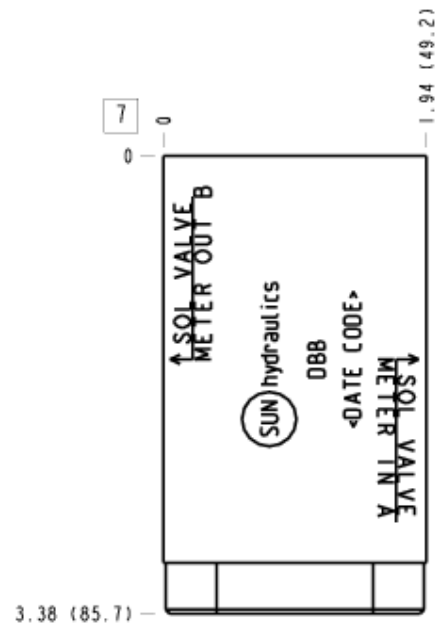

## Face 8

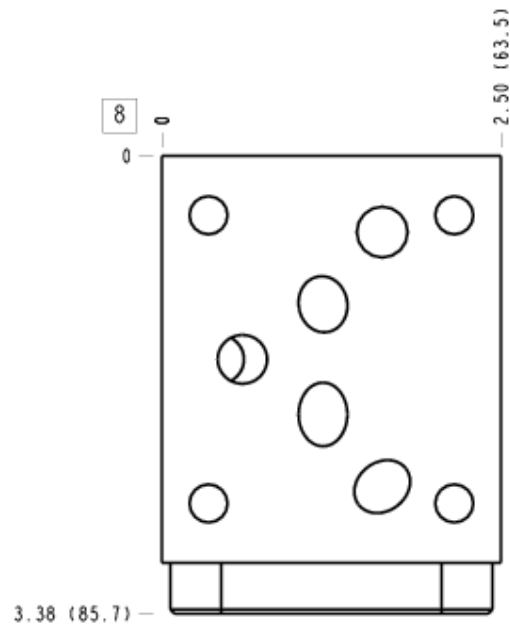

## Face 10

