


SAE 3000 PSI Flare Flange with Threaded Holes, Metric

SAE J518 Code 61 (ISO 6162-1)

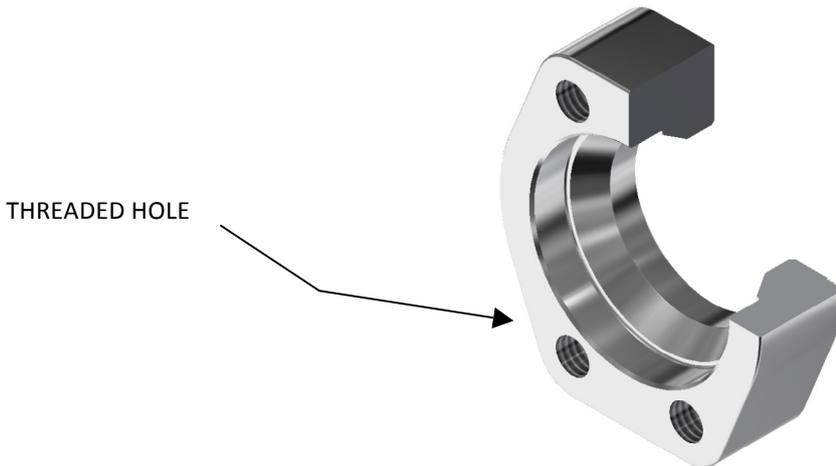

FFTM34 - Flare Flange with Threaded Holes, Metric

Size	Pipe O.D. (mm)	Standard Part Number	Working Pressure PSI (Bar)	Weight lbs (kg)
1/2"	16	FFTM34-050-16MM-*	5000 (350)	0.54 (0.24)
1/2"	18	FFTM34-050-18MM-*	5000 (350)	0.52 (0.24)
1/2"	20	FFTM34-050-20MM-*	5000 (350)	0.49 (0.22)
1/2"	25	FFTM34-050-25MM-*	5000 (350)	0.47 (0.21)
3/4"	20	FFTM34-075-20MM-*	5000 (350)	0.72 (0.33)
3/4"	25	FFTM34-075-25MM-*	5000 (350)	0.70 (0.32)
3/4"	30	FFTM34-075-30MM-*	5000 (350)	0.64 (0.29)
1"	25	FFTM34-100-25MM-*	5000 (350)	0.87 (0.39)
1"	30	FFTM34-100-30MM-*	5000 (350)	0.81 (0.37)
1"	38	FFTM34-100-38MM-*	5000 (350)	0.73 (0.33)
1-1/4"	30	FFTM34-125-30MM-*	4000 (280)	1.29 (0.59)
1-1/4"	38	FFTM34-125-38MM-*	4000 (280)	1.20 (0.54)
1-1/4"	42	FFTM34-125-42MM-*	4000 (280)	1.15 (0.52)
1-1/2"	30	FFTM34-150-30MM-*	4000 (280)	2.18 (0.99)
1-1/2"	38	FFTM34-150-38MM-*	4000 (280)	2.01 (0.91)
1-1/2"	42	FFTM34-150-42MM-*	4000 (280)	1.82 (0.83)
1-1/2"	50	FFTM34-150-50MM-*	4000 (280)	1.67 (0.76)
2"	50	FFTM34-200-50MM-*	4000 (280)	2.68 (1.22)
2"	60	FFTM34-200-60MM-*	4000 (280)	2.45 (1.11)
2-1/2"	60	FFTM34-250-60MM-*	3000 (210)	3.75 (1.70)
2-1/2"	73	FFTM34-250-73MM-*	3000 (210)	3.18 (1.44)
2-1/2"	75	FFTM34-250-75MM-*	3000 (210)	3.18 (1.44)
3"	75	FFTM34-300-75MM-*	3000 (210)	6.17 (2.80)
3"	90	FFTM34-300-90MM-*	3000 (210)	5.13 (2.33)

*** Materials:**

Standard, No Designation = Carbon Steel, Zinc Nickel Plated.

HDG = Carbon Steel, Hot Dip Galvanized.

SS = Stainless Steel, Type 316.

Ordering Example: FFTM34-200-50MM-SS

* Insert Material

3D step models available upon request