
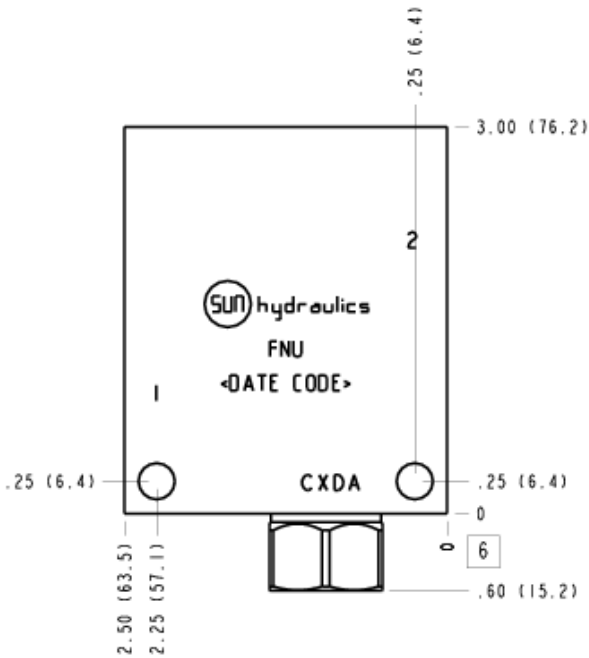




TECHNICAL DATA

Body Type	Line mount
Interface	None
Check Cracking Pressure	4 psi
Body Features	Ninety degree with reverse flow check
Includes integral cartridge(s)	Yes (see Included Components)
Mounting Hole Diameter	.28 in.
Mounting Hole Depth	Through
Mounting Hole Quantity	2
Open Cavities	1
Cavity	T-10A
Port Size	3/8" BSPP
Model Weight	0.92 lb.

NOTES *Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
FNU, /10, /11, /15, /16, /V	All Ports: 3/8" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
CXDAXAN	Cartridge	1

CONFIGURATION OPTIONS
Model Code Example: FNUArray


MODIFIER
6061-T651 Aluminum, Buna-N
/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/V 6061-T651 Aluminum, Viton
/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black
/S5 65-45-12 Ductile Iron, Buna-N, Electroless Nickel
/Y 65-45-12 Ductile Iron, Viton, Dewatering Oil
/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer
/Y4 65-45-12 Ductile Iron, Viton, Chem. Black
/Y5 65-45-12 Ductile Iron, Viton, Electroless Nickel

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 2

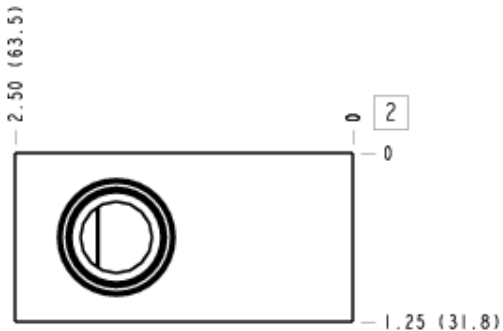


Face 5

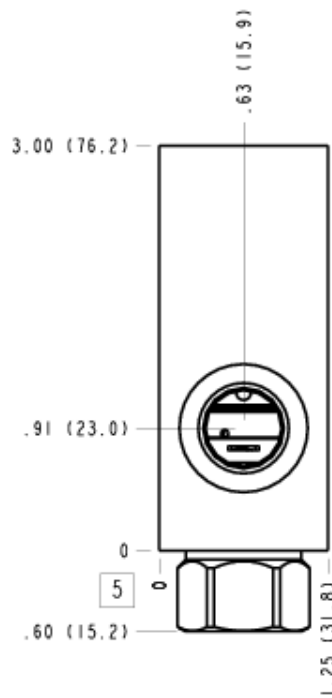


Face 6

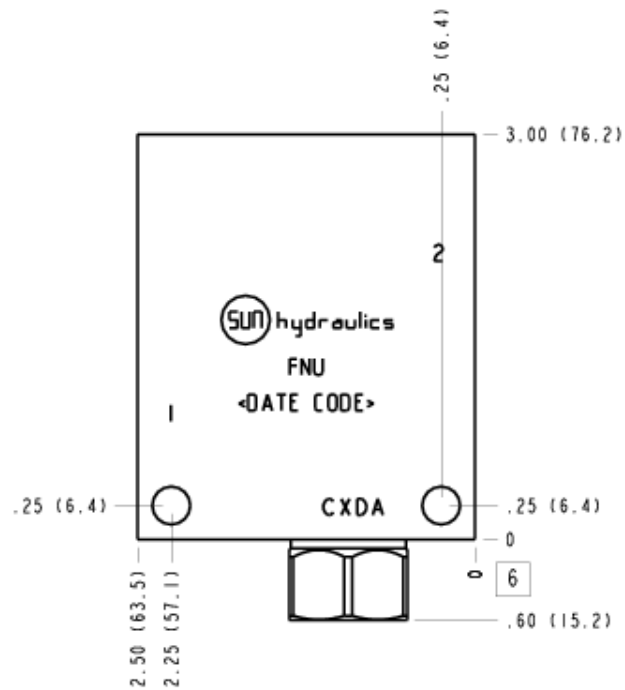

Face 7

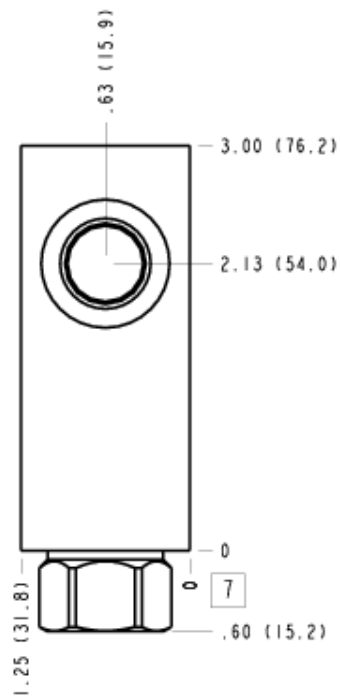

Face 8

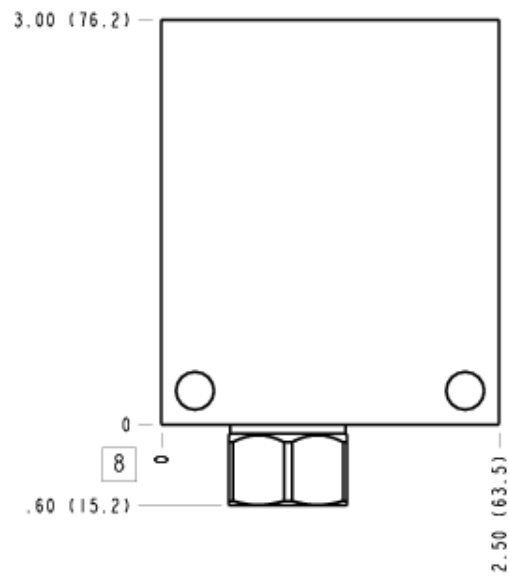

Face 10

