

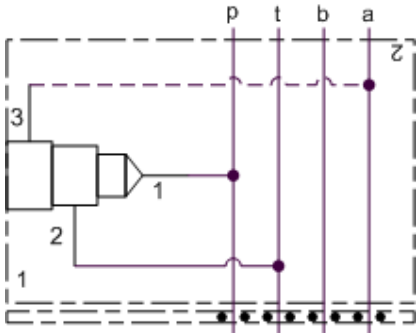


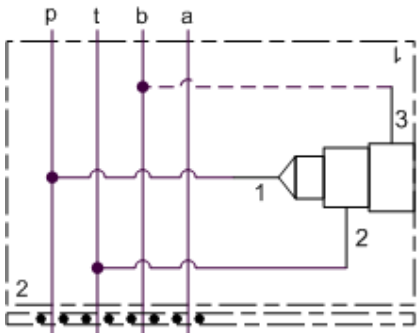

"A" PORT CONTROL

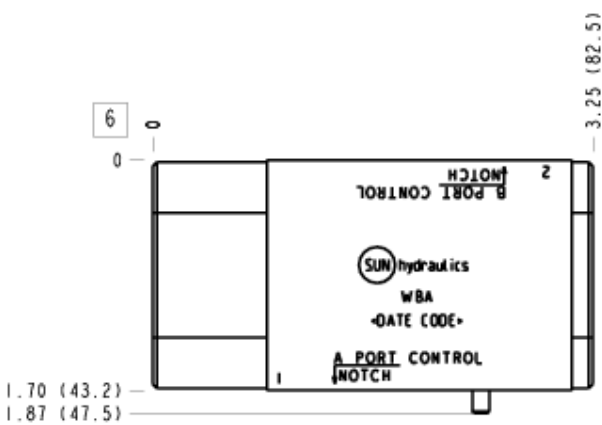

"B" PORT CONTROL

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Body Features	P to T, port 3 to A or B
Stack Height	1.75 in.
Seal Plate Included (see notes)	Yes
Open Cavities	1
Cavity	T-11A
Model Weight	0.75 lb.

NOTES

- Stack height value in technical data table includes seal retainer plate.
- Customer to install locating pin according to functional orientation required.
- **Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-012	O-Ring	4
700-002	Seal Plate	1
811-001-006	Pin	1
850-004-218	Plug	1

CONFIGURATION OPTIONS

Model Code Example: WBA

MODIFIER

- 6061-T651 Aluminum, Buna-N
- /10

6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- /11

6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- /15

6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
- /16

6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
- /N

6061-T651 Aluminum, Viton
- /S

65-45-12 Ductile Iron, Buna-N, Dewatering Oil
- /S3

65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
- /S4

65-45-12 Ductile Iron, Buna-N, Chem. Black
- /S5

65-45-12 Ductile Iron, Buna-N, Electroless Nickel
- /Y

65-45-12 Ductile Iron, Viton, Dewatering Oil
- /Y3

65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer
- /Y4

65-45-12 Ductile Iron, Viton, Chem. Black
- /Y5


65-45-12 Ductile Iron, Viton, Electroless Nickel

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 2

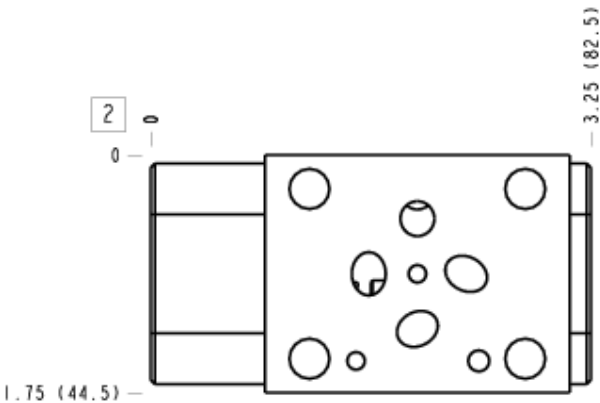


Face 5

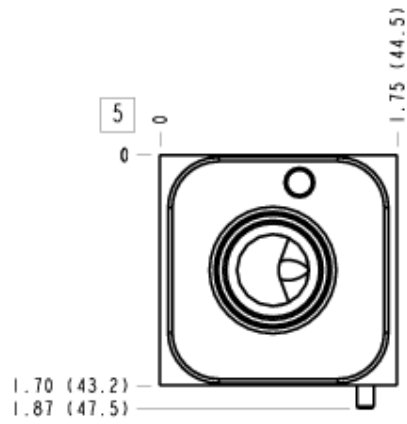

Face 6

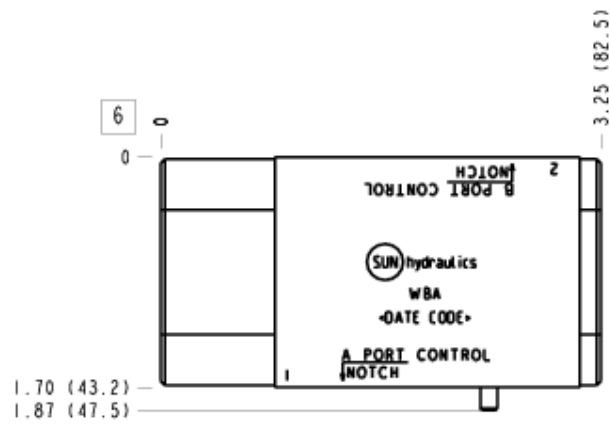

Face 7

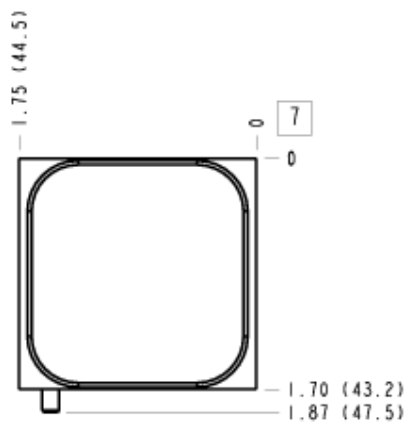

Face 10

