
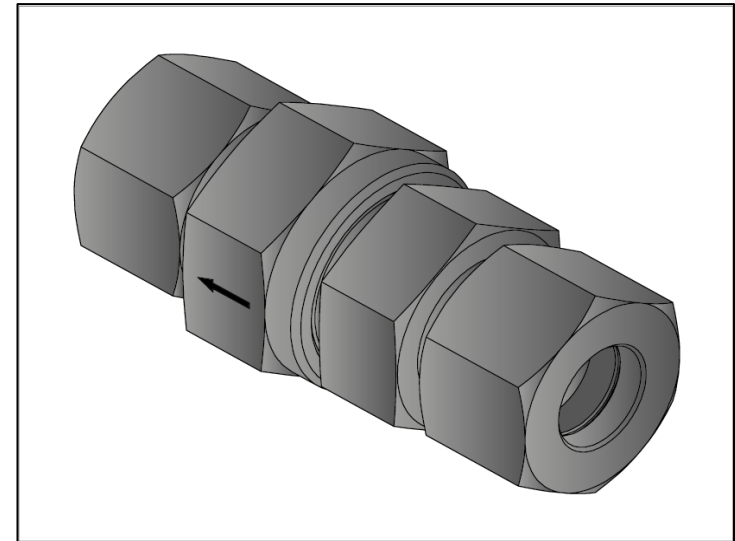


RSV

Schneidringanschluss / Cutting Ring Connection

- Rückschlagventil mit 24° Konus
- L- und S-Reihe
- Gewinde: M
- DIN 2353 / ISO 8434-1

- check valve with 24° cone end
- L- and S-series
- thread: M
- DIN 2353 / ISO 8434-1

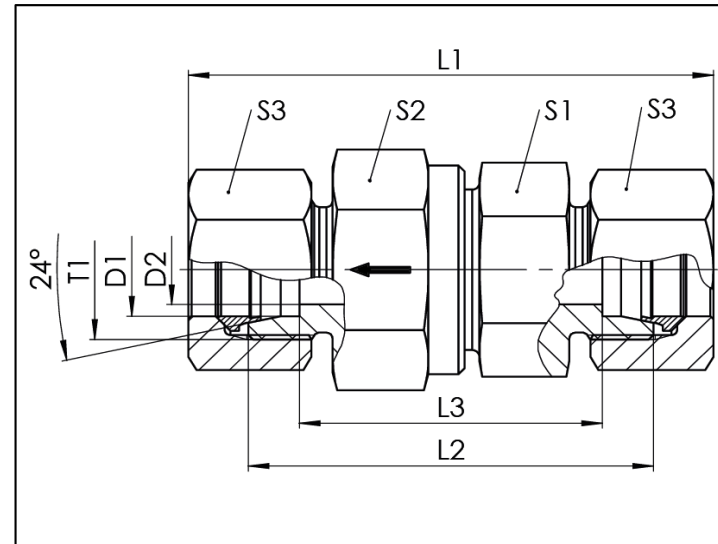

RSV

Baureihe											Gewicht Stutzen	Gesamt- gewicht	Bezeichnung	Artikel-Nr. Stutzen	Artikel-Nr. Komplettteil
series	D1	T1	D2	L1	L2	L3	S1	S2	S3	PB	weight fitting	total weight	Name	Article No. fitting	Article No. complete part
	mm		mm	mm	mm	mm	mm	mm	mm	bar	g	g			
L	6	M12x1,5	4	59	43	29	17	17	14	400	48	74	RSV 06L 1,0bar	229879	103962
	8	M14x1,5	6	60	44	30	17	19	17	400	55	93	RSV 08L 1,0bar	229882	103966
	10	M16x1,5	7	70,5	54,5	40,5	22	24	19	400	110	156	RSV 10L 1,0bar	121256	103970
	12	M18x1,5	9	73,5	57,5	43,5	27	30	22	400	169	231	RSV 12L 1,0bar	218404	103975
	15	M22x1,5	11	78,5	61,5	47,5	27	30	27	315	190	289	RSV 15L 1,0bar	229887	103983
	18	M26x1,5	14	85,5	66,5	51,5	36	36	32	250	321	466	RSV 18L 1,0bar	229889	103988
	22	M30x2	18	97,5	76,5	61,5	41	46	36	160	505	699	RSV 22L 1,0bar	229892	103992
	28	M36x2	23	108,5	86,5	71,5	50	55	41	160	819	1047	RSV 28L 1,0bar	219274	103996
	35	M45x2	30	113,5	89,5	68,5	60	60	50	100	987	1333	RSV 35L 1,0bar	218926	104001
	42	M52x2	36	129	105	83	80	90	60	100	2458	2969	RSV 42L 1,0bar	129701	104005
S	6	M14x1,5	4	64,5	48,5	34,5	19	19	17	630	72	115	RSV 06S 1,0bar	229880	103964
	8	M16x1,5	5	64,5	48,5	34,5	19	22	19	630	85	133	RSV 08S 1,0bar	230636	103968
	10	M18x1,5	7	73,5	55,5	40,5	24	27	22	630	144	216	RSV 10S 1,0bar	229884	103973
	12	M20x1,5	8	75,5	57,5	42,5	27	30	24	400	186	267	RSV 12S 1,0bar	229885	103977
	14	M22x1,5	10	84	64	48	27	32	27	400	219	342	RSV 14S 1,0bar	229886	103981
	16	M24x1,5	12	87,5	67,5	50,5	32	36	30	400	301	451	RSV 16S 1,0bar	208583	103985
	20	M30x2	16	99,5	75,5	54,5	41	46	36	250	509	751	RSV 20S 1,0bar	229890	103990
	25	M36x2	20	108,5	82,5	58,5	46	50	46	250	672	1140	RSV 25S 1,0bar	232988	103994
	30	M42x2	25	124,5	96,5	69,5	55	60	50	250	1104	1622	RSV 30S 1,0bar	107566	103999
	38	M52x2	32	138,5	107,5	75,5	65	70	60	250	1655	2405	RSV 38S 1,0bar	229897	104003

Öffnungsdruck 1,0 bar / opening pressure 1,0 bar

Andere Öffnungsdrücke auf Anfrage / other opening pressures on request

PB mit 2,5-facher Sicherheit / PB with 2.5 times safety

Technische Änderungen vorbehalten / Subject to technical alteration