



Coil options

With ISO4400 connector
(weather protection IP65)

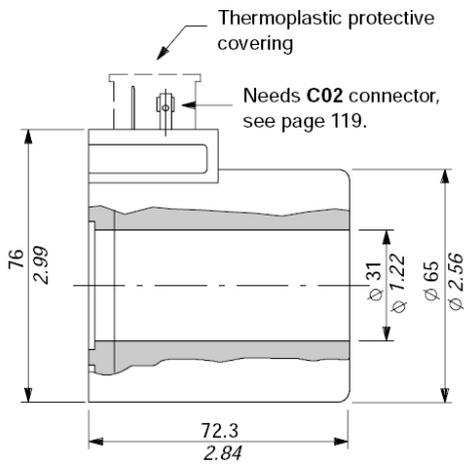

With flying leads and DEUTSCH DT04 connector
(weather protection IP67)

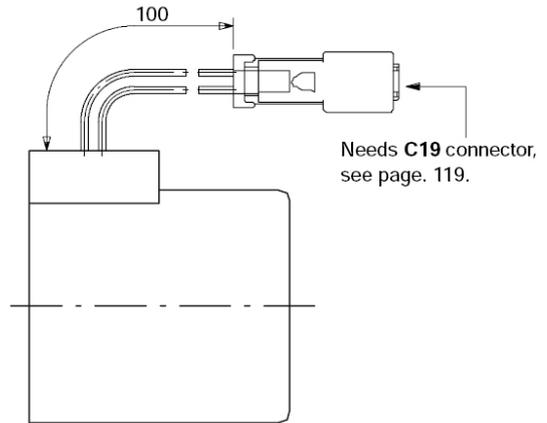

Operating features

- Nominal voltage : 12-20-24-94-192VDC
- Nominal voltage tolerance . . . : ±10%
- Power rating : 60 W
- Duty cycle : 100%
- Weather protection : depending on connector type
- Coil insulation : Class H