
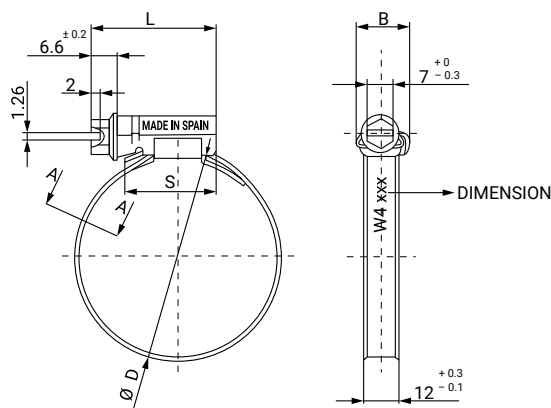




This clamp represents the latest stage in the evolution of the ASFA 12 mm range. One of the main developments in this version is the lateral displacement of the band thread, which reduces the tendency of the band end to exit the housing off-centre when tightened.

Thanks to the combination of the housing, the locking system and the location of the screw within the housing, this clamp offers superior performance at the same torque ratings.

Specially recommended for industrial applications.



DIN 3017. The ASFA S hose clip complies fully with the DIN 3017 norm and also with the directive EU 2002/95/EC.

* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.



MATERIAL: Band and support: W4
Stainless steel X5Cr Ni 18/10
DIN 1.4301 AISI 304
Bolt: Stainless steel
AISI 304 Cu DIN 1.4567

**CORROSION
RESISTANCE:** 400 hours salt spray
(ASTM B-117)

Ø Application mm	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
16-27	03014730	29,6	0,80	11	16,7	19,5	45	50	400
20-32	03014510	29,6	0,80	11	16,7	19,5	45	50	400
25-40	03014529	29,6	0,80	11	16,7	19,5	40	50	400
30-45	03014748	29,6	0,80	11	16,7	19,5	35	50	400
32-50	03014537	29,6	0,80	11	16,7	19,5	35	50	200
40-60	03014545	29,6	0,80	11	16,7	19,5	30	50	400
50-70	03014553	29,6	0,80	11	16,7	19,5	25	50	400
60-80	03014561	29,6	0,80	11	16,7	19,5	20	50	50
70-90	03014570	29,6	0,80	11	16,7	19,5	17	50	50
80-100	03014588	29,6	0,80	11	16,7	19,5	14	25	200
90-110	03014596	29,6	0,80	11	16,7	19,5	12	25	200
100-120	03014609	29,6	0,80	11	16,7	19,5	10	25	200



ASYMETRIC STAMPING

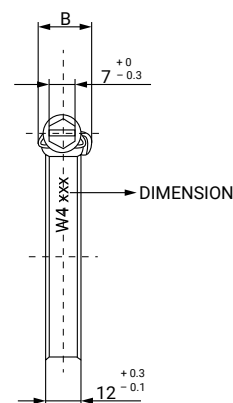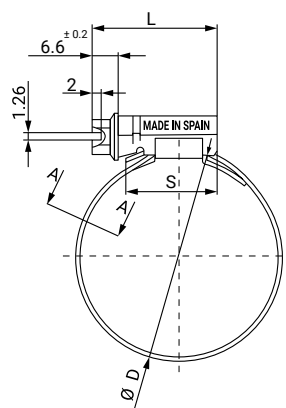

Ø Application mm	Part Number	L +1-0.5	T ±0.1	H Max.	B Max.	S Min.	Max. Pressure Bar	Box Quantity	Outer Box Quantity
110-130	03014617	29,6	0,80	11	16,7	19,5	8	25	25
120-140	03014625	29,6	0,80	11	16,7	19,5	7	25	25
130-150	03014633	31,6	0,80	11	16,7	21,5	6	25	25
140-160	03014641	31,6	0,80	11	16,7	21,5	5	25	25
150-170	03014650	31,6	0,80	11	16,7	21,5	4	25	25
160-180	03014668	31,6	0,80	11	16,7	21,5	3	25	25
170-190	03014676	31,6	0,80	11	16,7	21,5	2	10	10
180-200	03014684	31,6	0,80	11	16,7	21,5	2	10	10
190-210	03014692	31,6	0,80	11	16,7	21,5	1,8	10	10
200-220	03014705	31,6	0,80	11	16,7	21,5	1,8	10	10
210-230	03014713	31,6	0,80	11	16,7	21,5	1,8	10	10
220-240	03014721	31,6	0,80	11	16,7	21,5	1,8	10	10
230-250	03014783	31,6	0,80	11	16,7	21,5	1,6	10	10
240-260	03014751	31,6	0,80	11	16,7	21,5	1,6	10	10
250-270	03014772	31,6	0,80	11	16,7	21,5	1,6	10	10
260-280	03014794	31,6	0,80	11	16,7	21,5	1,6	10	10
270-290	03014923	31,6	0,80	11	16,7	21,5	1,6	10	10
280-300	03014935	31,6	0,80	11	16,7	21,5	1,6	10	10
290-310	03014947	31,6	0,80	11	16,7	21,5	1,6	10	10