


TECHNISCHE ÄNDERUNGEN VORBEHALTEN · NACHDRUCK UND KOPIEN NUR MIT UNSEREM EINVERSTÄNDNIS · Specifications subject to change without notice · Copyright ELAFLEX






GRUPPE 3 Section	GE- WICHT	ABMESSUNGEN ≈ mm		FORM	WERKSTOFFE Materials	GEWINDE- GRÖSSE		BESTELL- NUMMER
	Weight Approx.	Dimensions ≈ mm		Style		Thread Size		Part Number
	≈ kg	d	L			IG	AG	Type
	0,05	13	22	1	Messing — brass	G 1/2	G 1/2	RS 1/2 x 1/2
	0,06	13	23	2		G 1/2	G 3/4	RS 1/2 x 3/4
	0,07	18	24	1		G 3/4	G 3/4	RS 3/4 x 3/4
	0,08	18	22	1		G 3/4	G 1	RS 3/4 x 1
	0,09	18	30	2		G 1	G 3/4	RS 1 x 3/4
	0,08	24	28	1		G 1	G 1	RS 1 x 1
	0,12	25	29	1		G 1	G 1 1/4	RS 1 x 1 1/4 mit Öse / with log
	0,23	23	26	1		G 1	G 1 1/2	RS 1 x 1 1/2
	0,40	24	28	2		G 1	G 2	RS 1 x 2
	0,10	24	32	3		G 1 1/4	G 1	RS 1 1/4 x 1
	0,15	32	29	1		G 1 1/4	G 1 1/4	RS 1 1/4 x 1 1/4
	0,19	32	35	4		G 1 1/4	G 1 1/2	RS 1 1/4 x 1 1/2
	0,31	32	30	7		G 1 1/4	G 2	RS 1 1/4 x 2
	0,25	24	38	2		G 1 1/2	G 1	RS 1 1/2 x 1
	0,23	32	38	2		G 1 1/2	G 1 1/4	RS 1 1/2 x 1 1/4
	0,25	38	40	1		G 1 1/2	G 1 1/2	RS 1 1/2 x 1 1/2
	0,31	38	34	4		G 1 1/2	G 2	RS 1 1/2 x 2
	0,32	32	41	2		G 2	G 1 1/4	RS 2 x 1 1/4
	0,30	38	43	3		G 2	G 1 1/2	RS 2 x 1 1/2
	0,37	48	44	1		G 2	G 2	RS 2 x 2
	0,52	48	40	4		G 2	G 2 1/2	RS 2 x 2 1/2
	0,50	48	43	4		G 2	G 3	RS 2 x 3
	0,56	38	45	2		G 2 1/2	G 1 1/2	RS 2 1/2 x 1 1/2
	0,50	48	40	6		G 2 1/2	G 2	RS 2 1/2 x 2
	0,64	63	46	5		G 2 1/2	G 2 1/2	RS 2 1/2 x 2 1/2
	0,51	65	33	5		G 2 1/2	G 3	RS 2 1/2 x 3
	0,70	48	53	3		G 3	G 2	RS 3 x 2
	0,82	63	51	5		G 3	G 2 1/2	RS 3 x 2 1/2
	0,78	76	52	2		G 3	G 3	RS 3 x 3
	0,87	76	30	4		G 3	G 4	RS 3 x 4
	2,50	76	72	7		G 3	5 1/2" *)	RS 3 x 5 1/2
	1,00	76	51	3		G 4	G 3	RS 4 x 3
	1,87	76	61	3		G 4	G 4	RS 4 x 4
	3,53	100	88	6		G 4	5 1/2" *)	RS 4 x 5 1/2
	0,89	76	72	6	Aluminium — aluminium	G 3	5 1/2" *)	RS 3 x 5 1/2 Al
	1,45	100	88	6		G 4	5 1/2" *)	RS 4 x 5 1/2 Al

Reduzierstücke Type **RS**. Einerseits mit Rohr-Innengewinde mit einliegender Gewindedichtung GD aus Polyurethan. Andererseits mit Rohr-Außengewinde, flachdichtend mit stirnseitiger Dichtfläche (G = DIN EN ISO 228). Die Gewindelängen entsprechen den Mindestlängen der jeweiligen Gewindenorm und Gewindegröße.

*Female/male reducers type **RS**. One end female pipe thread with captive seal GD of polyurethane. Other end male pipe thread, with flat sealing surfaces (G = thread EN ISO 228 / BSP parallel). The thread lengths are acc. to the minimum lengths of the thread standards and sizes.*

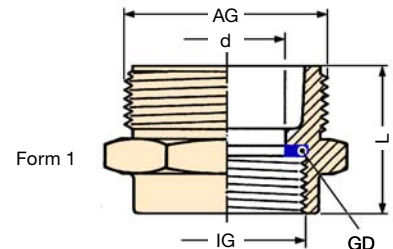

Type RS

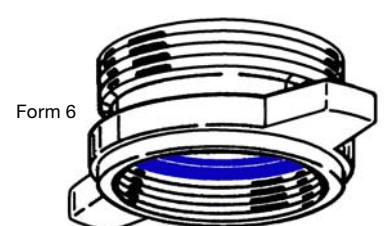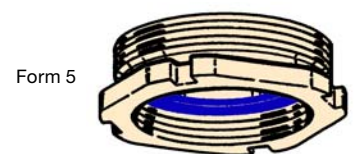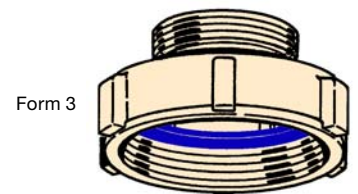

Eisenbahn-Kesselwagengewinde nach DIN 6602 (alte DIN 11)
*) Thread for rail tank cars according to DIN 6602 (old DIN 11)