
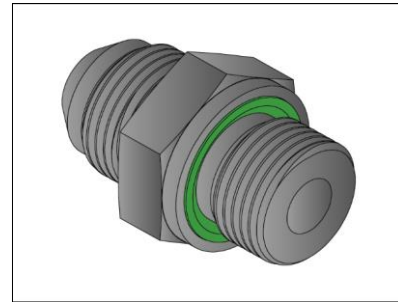


AGJ-M-WD

37° JIC-AG Bördelanschluss - metrisches AG / WD - 37° JIC-m flared tube ends - metric-m / WD

- Gerade Verschraubung
- Abdichtung durch Viton Weichdichtung DIN 3869
- Gewinde: UNF/UN - M
- ISO 8434-2 / SAE J 514 - DIN EN ISO 9974-2

- Straight Connector
- sealing by Viton elastic softseal DIN 3869
- thread: UNF/UN - M
- ISO 8434-2 / SAE J 514 - DIN EN ISO 9974-2

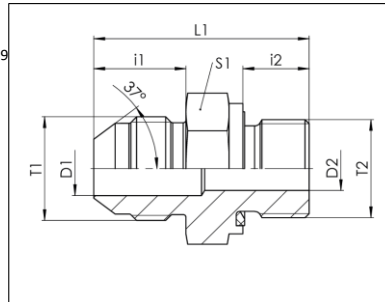

AGJ-M-WD

Dash	Rohr OD Tube OD		T1	T2	D1 mm	D2 mm	L1 mm	i1 mm	i2 mm	S1 mm	PN bar	Gewicht weight g	Bezeichnung Name	Artikel-Nr. Article No.
	mm	inch												
-4-M10x1	6	1/4"	7/16-20 UNF	M10x1	4	4	30	14	8	14	500	20	AGJ 7/16 - M10x1,0 WD	242058
-4-M12x1,5	6	1/4"	7/16-20 UNF	M12x1,5	4,4	4,4	34	14	12	17	500	28	AGJ 7/16 - M12x1,5 WD	242056
-6-M12x1,5	10	3/8"	9/16-18 UNF	M12x1,5	7,5	5	35	14,1	12	17	500	31	AGJ 9/16 - M12x1,5 WD	242288
-6-M14x1,5	10	3/8"	9/16-18 UNF	M14x1,5	7,5	7	36	14,1	12	19	500	38	AGJ 9/16 - M14x1,5 WD	212060
-6-M16x1,5	10	3/8"	9/16-18 UNF	M16x1,5	7,5	7,5	36	14,1	12	22	400	50	AGJ 9/16 - M16x1,5 WD	232675
-8-M18x1,5	12	1/2"	3/4-16 UNF	M18x1,5	9,9	9,9	39	16,7	12	24	400	67	AGJ 3/4 - M18x1,5 WD	233101
-10-M22x1,5	16	5/8"	7/8-14 UNF	M22x1,5	12,3	12,3	45	19,3	14	27	400	100	AGJ 7/8 - M22x1,5 WD	235357
-12-M27x2	18 20	3/4"	1.1/16-12 UN	M27x2	15,5	15,5	51	21,9	16	32	250	159	AGJ 1.1/16 - M27x2 WD	230921

Technische Änderungen vorbehalten / Subject to technical alteration

Zwischengröße auf Anfrage / Intermediate size on request
 Weitere Werkstoffe auf Anfrage / Other materials on request