


Art. 0312C - GAS

- Femmina con tronchetto filettato "GAS/BSTP" zincato e coprifleto
- Femelle avec tube fileté "GAS/BSTP" zingué et couvre-filet
- Galvanized female with "GAS/BSTP" thread and cover-thread
- Verzinkte M-Teil mit "GAS/BSTP" Aussengewinde und Decke
- Hembra con rosca "GAS/BSTP" galvanizada y cubrerrosca


	Ø
0312C050K00S	50x1 1/2"
0312C050K01S	50x2"
0312C076K03S	76x1 1/2"
0312C076K02S	76x2"
0312C076K00S	76x2 1/2"
0312C076K01S	76x3"
0312C089K01S	89x2 1/2"
0312C089K00S	89x3"
0312C108K01S	108x3"
0312C108K00S	108x4"
0312C133K01S	133x4"
0312C133K00S	133x5"
0312C159K02S	159x4"
0312C159K00S	159x6"
0312C194K00S	194x8"



Art. 0312C - NPT

- Femmina con tronchetto filettato "NPT" zincato e coprifleto
- Femelle avec tube fileté "NPT" zingué avec couvre-filet
- Galvanized female with "NPT" thread and cover-thread
- Verzinkte M-Teil mit "NPT" Aussengewinde und Decke
- Hembra con rosca "NPT" galvanizada y cubrerrosca

	Ø
0312C050K03S	50x2"
0312C076K04S	76x3"
0312C108K04S	108x4"
0312C159K04S	159x6"
0312C194K01S	194x8"




Art. 0313C - EN

- Maschio con flangia *EN 1092-1 zincato
- Male avec bride *EN 1092-1 zingué
- Galvanized male with flange *EN 1092-1
- Verzinkte V-Teil mit Flansch *EN 1092-1
- Rotula con brida *EN 1092-1 galvanizada

	Ø EN1092-1	Sp. thickness
0313C050S01B	50x50	8 mm
0313C076S12B	76x65	8 mm
0313C076S01B	76x80	10 mm
0313C089S03B	89x80	10 mm
0313C108S01B	108x100	10 mm
0313C133S01B	133x125	12 mm
0313C159S00B	159x150	12 mm
0313C194S00B	194x200	15 mm
0313C250S51B	**250x250	15 mm
0313C300S50B	**300x300	15 mm
0313C400S50B	**400x400	15 mm
0313C450S50B	**450x450	

** Maniglia non inclusa (art. M304C)
Lever not included (see art. M304C)

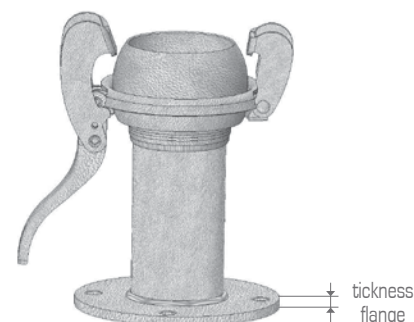

*Per le caratteristiche delle flange consultare il catalogo tecnico
For flanges characteristics please consult technical catalogue