


Test Coupling with Straight 24° Fitting SKK-20 Type G

A

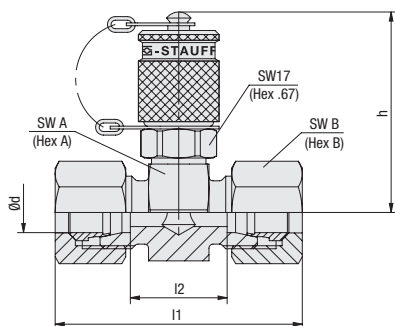

Series	PN (^{bar} /PSI)	Pipe	Dimensions					Weight (^{kg} /lbs) ca. per 100 ¹	Ordering Codes (Standard Option) ²
			Ød	~l1 ³	l2	h	Hex A		
L	315 4568	6	51	21	49	24	14	14,70	SKK-20-06L-G-W3-MS
			2.01	.83	1.93	.94	.55	32.34	
		8	51	21	49	24	17	15,90	SKK-20-08L-G-W3-MS
			2.01	.83	1.93	.94	.67	34.98	
		10	53	23	49	24	19	17,00	SKK-20-10L-G-W3-MS
			2.09	.91	1.93	.94	.75	37.40	
		12	53	23	50,5	27	22	19,80	SKK-20-12L-G-W3-MS
			2.09	.91	1.99	1.06	.87	43.56	
		15	55	25	52	30	27	25,90	SKK-20-15L-G-W3-MS
			2.17	.98	2.05	1.18	1.06	56.98	
		18	57	24	53	32	32	32,00	SKK-20-18L-G-W3-MS
			2.24	.94	2.09	1.26	1.26	70.40	
	160 2320	22	61	28	55	36	36	38,90	SKK-20-22L-G-W3-MS
			2.40	1.10	2.17	1.42	1.42	85.58	
		28	61	28	57,5	41	41	45,00	SKK-20-28L-G-W3-MS
			2.40	1.10	2.26	1.61	1.61	99.00	
		35	69	26	60	46	50	63,80	SKK-20-35L-G-W3-MS
			2.72	1.02	2.36	1.81	1.97	140.36	
S	630 9137	42	71	25	64,5	55	60	88,30	SKK-20-42L-G-W3-MS
			2.80	.98	2.54	2.17	2.36	194.26	
		6	55	25	49	24	17	17,10	SKK-20-06S-G-W3-MS
			2.17	.98	1.93	.94	.67	37.62	
		8	55	25	49	24	19	18,10	SKK-20-08S-G-W3-MS
			2.17	.98	1.93	.94	.75	39.82	
		10	57	24	49	24	22	21,10	SKK-20-10S-G-W3-MS
			2.24	.94	1.93	.94	.87	46.42	
		12	57	24	49	24	24	22,00	SKK-20-12S-G-W3-MS
			2.24	.94	1.93	.94	.94	48.40	
		14	63	27	50,5	27	27	28,20	SKK-20-14S-G-W3-MS
			2.50	1.06	1.99	1.06	1.06	62.17	
	400 5801	16	63	26	52	30	30	32,60	SKK-20-16S-G-W3-MS
			2.50	1.02	2.05	1.18	1.18	71.72	
		20	69	26	55	36	36	47,30	SKK-20-20S-G-W3-MS
			2.72	1.02	2.17	1.42	1.42	104.06	
		25	75	27	57,5	41	46	74,00	SKK-20-25S-G-W3-MS
			2.95	1.06	2.26	1.61	1.81	162.80	
30		81	28	60	46	50	87,70	SKK-20-30S-G-W3-MS	
		3.19	1.10	2.36	1.81	1.97	192.94		
315 4568	38	91	29	64,5	55	60	128,10	SKK-20-38S-G-W3-MS	
3.58	1.14	2.54	2.17	2.36	281.82				

Ordering Codes

***SKK*-20*-18L*-G*-SK*-W3*-MS**

* Type	Test Coupling with Piston Valve	SKK
* Series	STAUFF Test 20 (Connection Thread M16x2)	-20
* Outside Tube Diameter	acc. to dimension table	-18
* Series	Light Series Heavy Series	L S
* Seal Material	FKM (Viton®) EPDM	none -E
* Connection	Straight 24° Fitting	-G
* Protection Cap	Knurled protection cap Hexagonal protection cap Plastic protection cap	- -SK -KK
* Material Code	Steel, zinc/nickel-plated Stainless Steel V2A - 1.4305 (AISI 303) Stainless Steel V4A - 1.4571 (AISI 316 Ti)	-W3 -W4 -W5
* Assembling / Kitting	Fitting body only Fitting body supplied with Cutting rings and union nuts Fitting body supplied with soft-sealing cutting rings and union nuts	- -MS -MSV

¹ Weight including cutting rings and union nuts.

² Standard option: Fitting body supplied with Cutting rings and union nuts.

³ Approximate dimension in assembled condition.

Port acc. to ISO 8434-1 / DIN 2353

Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.

