
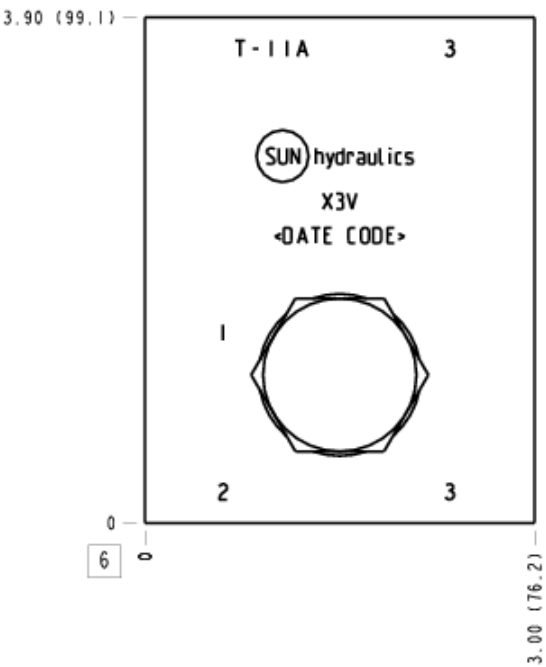




TECHNICAL DATA

Body Type	Line mount
Interface	Banjo Bolt
Body Features	Through port 3
Banjo Bolt Installation Torque	90 lb. ft. to 99 lb. ft. (120 Nm to 132 Nm)
Banjo Bolt Hex	1.18
Open Cavities	1
Cavity	T-11A
Port Size	1/2" BSPP
Model Weight	1.46 lb.

NOTES ***Important:*** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

Modifiers	Ports
X3V, /10, /11, /15, /16, /V	All Ports: 1/2" BSPP;

INCLUDED COMPONENTS

Part	Description	Quantity
330-073-003	Connector	1
505-012-003	O-Ring	1

CONFIGURATION OPTIONS

Model Code Example: X3V

MODIFIER


6061-T651 Aluminum, Buna-N
/11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/V 6061-T651 Aluminum, Viton
/16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
/15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
/S 65-45-12 Ductile Iron, Buna-N, Dewatering Oil
/S4 65-45-12 Ductile Iron, Buna-N, Chem. Black
/S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
/Y 65-45-12 Ductile Iron, Viton, Dewatering Oil
/Y4 65-45-12 Ductile Iron, Viton, Chem. Black
/Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 2

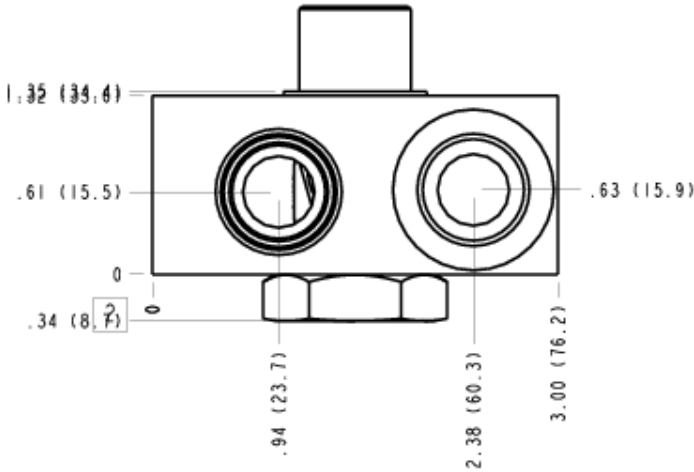


Face 5

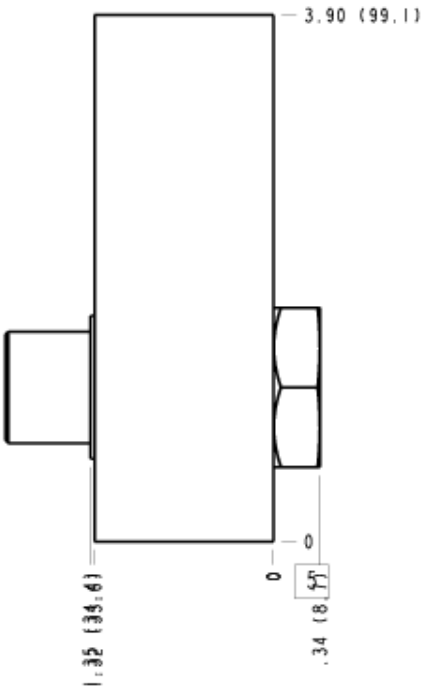


Face 6

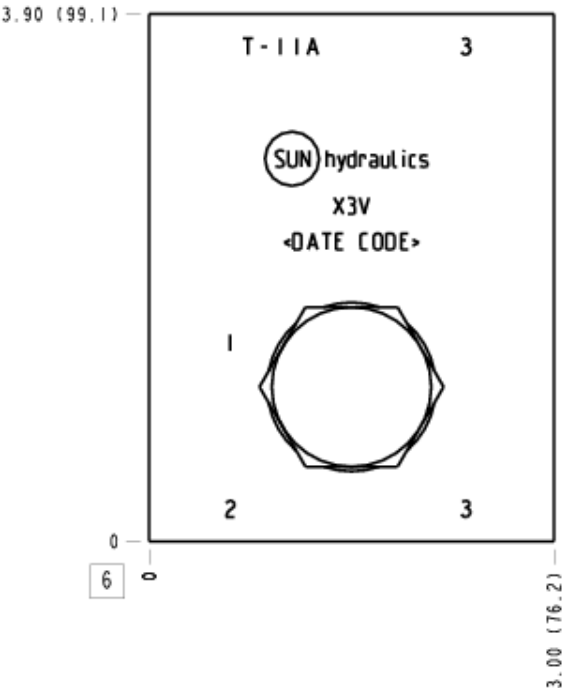

Face 7

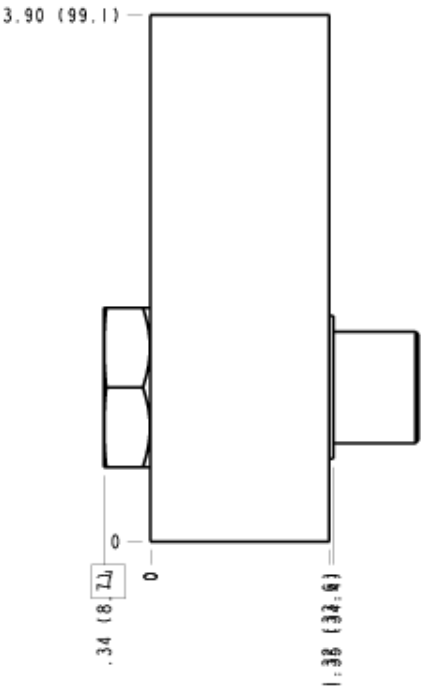

Face 8

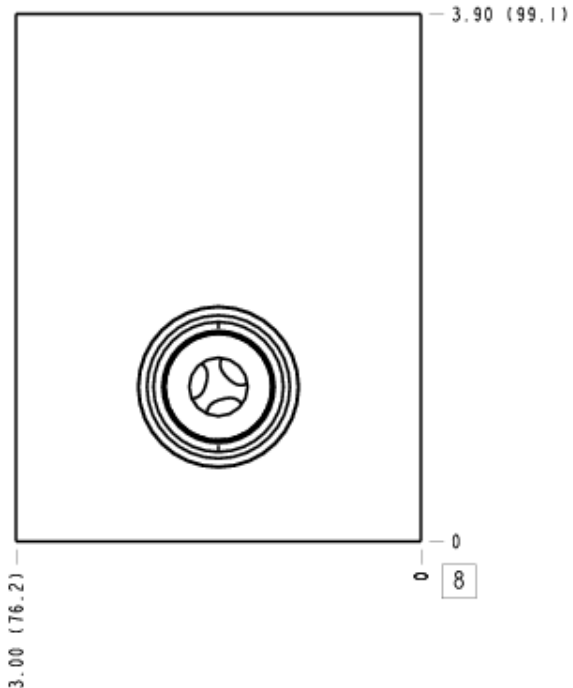

Face 10

