


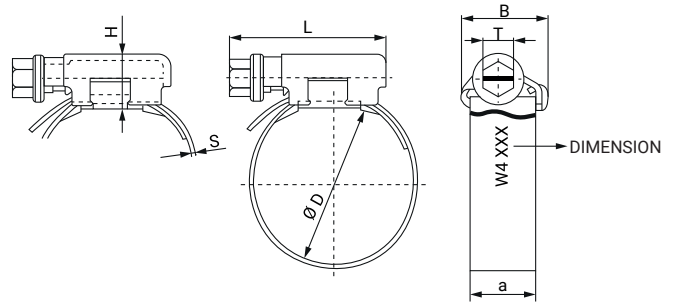

Mikalor High-Torque Clamps were designed to guarantee maximum performance in the most demanding applications. Thanks to the use of an M8 screw and the choice of 16mm bandwidth, torque values can be applied which are far higher than those used with the standard ASFA range, thereby ensuring perfect performance in high-pressure applications.


The High-Torque clamp is particularly popular in industrial and automotive applications due to its outstanding performance. The perfectly rounded bevelled band edges avoid the clamp cutting into or damaging the hose.

MATERIAL: Stainless steel band and housing W4 AISI 304 X5Cr Ni 18/10 (DIN 1.4301)
Stainless steel
W4 AISI 304 Cu screw

CORROSION RESISTANCE: 400 hours Salt Spray (ASTM B-117)

Fully complies with the **AE J1508 Type HD standard and EU Directive 2002/95/EC.*

Part Number	Ø Application mm	a ±0.2	L Max.	S ±0.1	H Max.	B Max.	T	Maximum values		Box Quantity	Outer Box Quantity
								Pressure (Bar)	Par (Nm)		
03067001	25-45	16	40	0,8	14	22	8	55	14	50	200
03067002	32-54	16	40	0,8	14	22	8	50	14	50	200
03067003	45-67	16	40	0,8	14	22	8	45	14	50	50
03067004	57-79	16	40	0,8	14	22	8	40	14	50	50
03067005	70-92	16	40	0,8	14	22	8	30	14	50	50
03067006	83-105	16	40	0,8	14	22	8	20	14	25	25
03067007	95-118	16	40	0,8	14	22	8	17	14	25	25
03067008	108-130	16	40	0,8	14	22	8	14	14	25	25
03067009	121-143	16	40	0,8	14	22	8	11	14	25	25
03067010	133-156	16	40	0,8	14	22	8	8	14	25	25
03067011	146-168	16	40	0,8	14	22	8	6	14	25	25
03067012	159-181	16	40	0,8	14	22	8	5	14	25	25
03067013	172-194	16	40	0,8	14	22	8	4	14	25	25
03067014	184-206	16	40	0,8	14	22	8	3	14	25	25
03067015	197-219	16	40	0,8	14	22	8	2	14	25	25
03067016	210-232	16	40	0,8	14	22	8	2	14	25	25

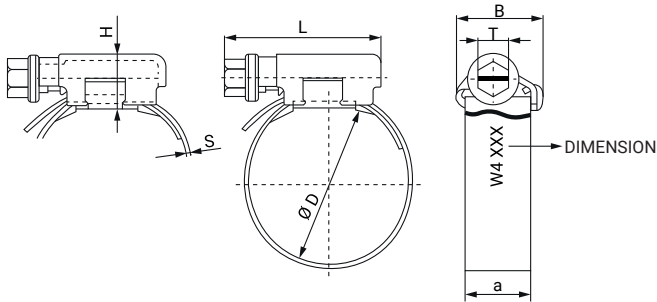

Part Number	Ø Application mm	a ±0.2	L Max.	S ±0.1	H Max.	B Max.	T	Maximum values		Box Quantity	Outer Box Quantity
								Pressure (Bar)	Par (Nm)		
03067017	223-245	16	40	0,85	14	22	8	2	14	25	25
03067018	236-258	16	40	0,85	14	22	8	2	14	25	25
03067019	249-271	16	40	0,85	14	22	8	2	14	25	25
03067020	262-284	16	40	0,85	14	22	8	2	14	25	25
03067021	275-297	16	40	0,85	14	22	8	2	14	25	25
03067022	288-310	16	40	0,85	14	22	8	2	14	25	25