


37° Flared Tube Fitting Set Type FI-AB ■ Series L / S

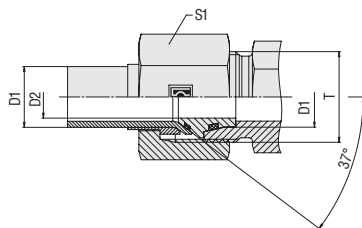

B

Series	Tube OD	PN	Dimensions			Weight	Ordering Codes
	(^{mm} / _{in})	(^{bar} / _{psi})	(^{mm} / _{in})			(^{kg} / _{lbs}) ca.	
	D1		Thread T	D2	S1	per 100	
L	6	500	M 12 x 1,5	3	14	1,74	FI-AB-06L-B-W3
	.24	7250		.12	.55	3.83	
	8	500	M 14 x 1,5	5	17	2,50	FI-AB-08L-B-W3
	.31	7250		.20	.67	5.50	
	10	500	M 16 x 1,5	6	19	3,38	FI-AB-10L-B-W3
	.39	7250		.24	.75	7.43	
	12	400	M 18 x 1,5	8	22	4,83	FI-AB-12L-B-W3
	.47	5800		.31	.87	10.62	
	15	400	M 22 x 1,5	11	27	4,66	FI-AB-15L-B-W3
	.59	5800		.43	1.06	10.24	
	18	400	M 26 x 1,5	14	32	10,11	FI-AB-18L-B-W3
	.71	5800		.55	1.26	22.25	
	22	250	M 30 x 2	17	36	14,25	FI-AB-22L-B-W3
	.87	3625		.67	1.42	31.35	
	28	250	M 36 x 2	23	41	16,47	FI-AB-28L-B-W3
	1.10	3625		.91	1.61	36.23	
	35	250	M 45 x 2	28	50	25,86	FI-AB-35L-B-W3
	1.38	3625		1.10	1.97	56.90	
	42	250	M 52 x 2	35	60	42,85	FI-AB-42L-B-W3
	1.65	3625		1.38	2.36	94.27	
S	6	630	M 14 x 1,5	3	17	2,51	FI-AB-06S-B-W3
	.24	9135		.12	.67	5.53	
	8	630	M 16 x 1,5	5	19	3,39	FI-AB-08S-B-W3
	.31	9135		.20	.75	7.46	
	10	630	M 18 x 1,5	6	22	4,77	FI-AB-10S-B-W3
	.39	9135		.24	.87	10.49	
	12	630	M 20 x 1,5	8	24	5,63	FI-AB-12S-B-W3
	.47	9135		.31	.94	12.39	
	14	630	M 22 x 1,5	9	27	7,77	FI-AB-14S-B-W3
	.55	9135		.35	1.06	17.10	
	16	630	M 24 x 1,5	11	30	10,88	FI-AB-16S-B-W3
	.63	9135		.43	1.18	23.94	
	20	400	M 30 x 2	14	36	15,90	FI-AB-20S-B-W3
	.79	5800		.55	1.42	34.98	
	25	400	M 36 x 2	19	46	29,34	FI-AB-25S-B-W3
	.98	5800		.75	1.81	64.54	
	30	400	M 42 x 2	23	50	33,64	FI-AB-30S-B-W3
	1.18	5800		.91	1.97	74.00	
	38	400	M 52 x 2	30	60	52,40	FI-AB-38S-B-W3
	1.50	5800		1.18	2.36	115.28	

Ordering Codes

***FI-AB*-10*L*-B*-W3**

* 37° Flared Tube Fitting Set **FI-AB**

* Outside Tube Diameter D1 (in mm) **-10**

* Series Light Series **L**
Heavy Series **S**

* Seal Material NBR (Buna-N®) **-B**
FKM (Viton®) **-V**
EPDM **-E**

* Material Code Steel, zinc/nickel-plated **-W3**

Please contact STAUFF for alternative materials and surface finishings.

Spare Parts / Accessories



O-Ring
Type **O-RING**

Page 207

Standard seal material is NBR (Buna-N®).

