

Cavallotti

09

U-Bolts

Abarcones



Materiali Materials Materiales

Materiali standard del cavallotto

- **Acciaio S 275 JR (M3)**
Finitura **zincato** (CL-CM-CP-CD-CQL-CQM-CQP-CQR)
- **Acciaio S 275 JR (M3)**
Finitura **crapal** (CZF)
- **Acciaio Inox AISI 304L (M5)**
Finitura **lavato** (CL, CP)
- **Acciaio Inox AISI 316L (M6)**
Finitura **lavato** (CM)
- **Acciaio S 235 JR (M3)**
Finitura **zincata** (CFP)

Diversi diametri e materiali disponibili a richiesta.

Materiali standard di componenti e accessori

Base in plastica per tubo (su richiesta)
Materiale Polipropilene (PP) o Poliammide (PA)

I cavallotti **CL-CM-CP** sono forniti con 2 dadi e 2 rondelle.
I cavallotti **CZF** sono forniti con 2 dadi flangiati DIN 6923.
I cavallotti **CD** sono forniti con 4 dadi e 2 rondelle.
I cavallotti **CQ** non comprendono dadi e rondelle.
I cavallotti **CFP** sono forniti con 2 dadi e 2 viti.

Per le caratteristiche dei materiali vedi l'**Appendice Tecnica** a pagina 182.

U-Bolt standard materials

- **Steel S 275 JR (M3)**
Finishing **galvanised** (CL-CM-CP-CD-CQL-CQM-CQP-CQR)
- **Steel S 275 JR (M3)**
Finishing **crapal** (CZF)
- **Stainless Steel AISI 304L (M5)**
Finishing **washed** (CL, CP)
- **Stainless Steel AISI 316L (M6)**
Finishing **washed** (CM)
- **Steel S 235 JR (M3)**
Galvanised (CFP)

Different diameters and materials available on request.

Components and accessories standard materials

Plastic pipe saddle (on request)
Material Polypropylene (PP) or Polyamide (PA)

CL-CM-CP U-Bolts are supplied with 2 bolts and 2 washers.
CZF U-Bolts are supplied with 2 flanged nuts DIN 6923.
CD U-Bolts are supplied with 4 nuts and 2 washers.
CQ U-Bolts do not include nuts and washers.
CFP U-Bolts are supplied with 2 nuts and 2 screws.

For material characteristics, see **Technical Appendix** at page 182.

Materiales estándar del abarcón

- **Acero S 275 JR (M3)**
Acabado **zincado** (CL-CM-CP-CD-CQL-CQM-CQP-CQR)
- **Acero S 275 JR (M3)**
Acabado **crapal** (CZF)
- **Acero inoxidable AISI 304L (M5)**
Acabado **lavado** (CL, CP)
- **Acero inoxidable AISI 316L (M6)**
Acabado **lavado** (CM)
- **Acero S 235 JR (M3)**
Acabado **zincado** (CFP)

Diferentes diámetros y materiales disponibles bajo pedido.

Materiales estándar de componentes y accesorios

Base de plástico para tubo (bajo pedido)
Material Polipropileno (PP) o Poliamida (PA)

Abarcones **CL-CM-CP** se suministran con 2 tuercas y 2 arandelas.
Abarcones **CZF** se suministran con 2 tuercas bridadas DIN 6923.
Abarcones **CD** se suministran con 4 tuercas y 2 arandelas.
Abarcones **CQ** no incluyen tuercas ni arandelas.
Abarcones de **CFP** se suministran con 2 tuercas y 2 tornillos.

Para las características de los materiales, consulte el **Apéndice Técnico** en la página 182.

CL Cavallotto leggero


CL Lightweight round U-bolt

CL Abarcón ligero

Con 2 dadi e 2 rondelle

With 2 nuts and 2 washers

Con 2 tuercas y 2 arandelas

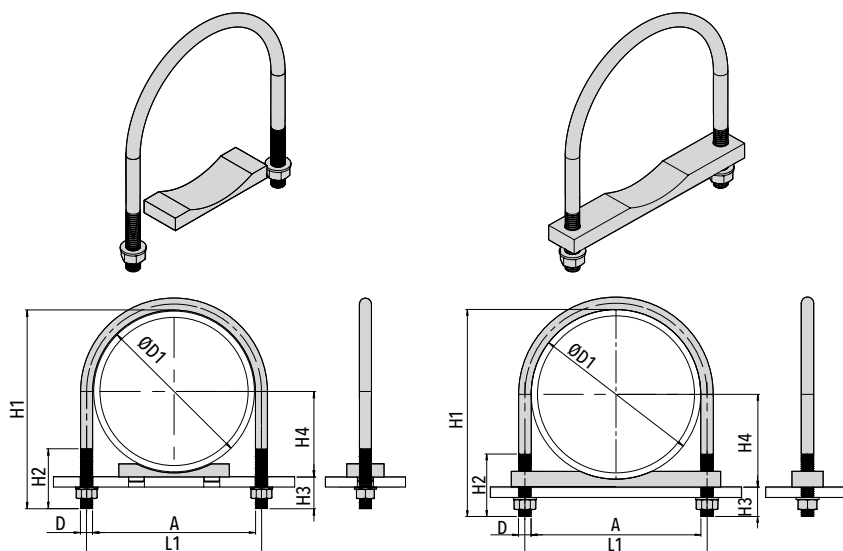

Code	Outside diameter ØD1		DN	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	(DN 6-15 no saddle)	
	(mm)	(in)							H3	H4
CL-10-M3	10	1/8"	6	M6	11 (.43")	17 (.67")	31 (1.22")	19 (.75")	21 (.83")	5 (.20")
CL-13.5-M3	13,5	1/4"	8	M6	14 (.56")	20 (.78")	34 (1.34")	19 (.75")	20,5 (.81")	6,75 (.27")
CL-17.2-M3	17,2	3/8"	10	M6	18 (.70")	24 (.94")	37 (1.46")	19 (.75")	19,8 (.78")	8,6 (.34")
CL-21.3-M3	21,3	1/2"	15	M6	22 (.87")	28 (1.10")	43 (1.70")	25 (.98")	21,7 (.85")	10,65 (.42")

Code	Outside diameter ØD1		DN	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	With short saddle BC		With long saddle BL	
	(mm)	(in)							H3	H4	H3	H4
CL-26.9-M3	26,9	3/4"	20	M6	27 (1.06")	33 (1.30")	47 (1.85")	25 (.98")	15 (.60")	18,45 (.73")	15 (.60")	18,45 (.73")
CL-33.7-M3	33,7	1"	25	M6	34 (1.34")	40 (1.57")	55 (2.17")	25 (.98")	16,43 (.65")	21,85 (1.65")	16,43 (.65")	21,85 (1.65")
CL-42.4-M3	42,4	1.1/4"	32	M6	43 (1.70")	49 (1.93")	63 (2.48")	25 (.98")	15,46 (.61")	26,2 (1.03")	15,46 (.61")	26,2 (1.03")
CL-48.3-M3	48,3	1.1/2"	40	M8	49 (1.93")	57 (2.24")	73 (2.87")	30 (1.18")	19,7 (.78")	29,15 (1.15")	19,7 (.78")	29,15 (1.15")
CL-60.3-M3	60,3	2"	50	M8	61 (2.40")	69 (2.72")	85 (3.35")	30 (1.18")	19,7 (.78")	35,15 (1.38")	19,7 (.78")	35,15 (1.38")
CL-76.1-M3	76,1	2.1/2"	65	M8	77 (3.03")	85 (3.35")	101 (3.98")	30 (1.18")	19,9 (.78")	43 (1.69")	19,9 (.78")	43 (1.69")
CL-88.9-M3	88,9	3"	80	M8	89 (3.50")	97 (3.82")	113 (4.45")	30 (1.18")	16,1 (.63")	52,45 (2.06")	16,1 (.63")	52,45 (2.06")
CL-102-M3	102	3.1/2"	90	M8	102 (4.02")	110 (4.33")	130 (5.12")	35 (1.38")	20 (.79")	59 (2.32")	18 (.71")	61 (2.40")
CL-114.3-M3	114,3	4"	100	M8	115 (4.53")	123 (4.84")	142 (5.59")	35 (1.38")	19,7 (.78")	65,15 (2.56")	17,7 (.70")	67,15 (2.64")
CL-139.7-M3	139,7	5"	125	M8	140 (5.51")	148 (5.83")	169 (6.65")	35 (1.38")	21,3 (.84")	78,85 (3.10")	19,3 (.76")	79,85 (3.14")
CL-168-M3	168	6"	150	M10	168 (6.61")	178 (7.01")	202 (7.95")	45 (1.77")	26 (1.02")	92 (3.62")	24 (.94")	94 (3.70")
CL-219-M3	219	8"	200	M10	220 (8.66")	230 (9.06")	254 (10")	45 (1.77")	27 (1.06")	117,5 (4.63")	25 (.98")	119,5 (4.70")
CL-273-M3	273	10"	250	M10	274 (10.78")	284 (11.18")	308 (12.13")	45 (1.77")	27 (1.06")	144 (5.67")	25 (.98")	146 (5.75")
CL-324-M3	324	12"	350	M16	324 (12.76")	340 (13.39")	368 (14.49")	60 (2.36")	36 (1.42")	170 (6.69")	29 (1.14")	177 (6.97")
CL-356-M3	356	14"	350	M16	356 (14.02")	372 (14.65")	400 (15.75")	60 (2.36")	36 (1.42")	186 (7.32")	29 (1.14")	193 (7.60")
CL-406.4-M3	406,4	16"	400	M16	408 (16.06")	424 (16.69")	452 (17.80")	60 (2.36")	36 (1.42")	211,2 (8.31")	29 (1.14")	218,2 (8.59")

CM Cavallotto medio


CM Medium round U-bolt

CM Abarcón medio

Con 2 dadi e 2 rondelle

With 2 nuts and 2 washers

Con 2 tuercas y 2 arandelas

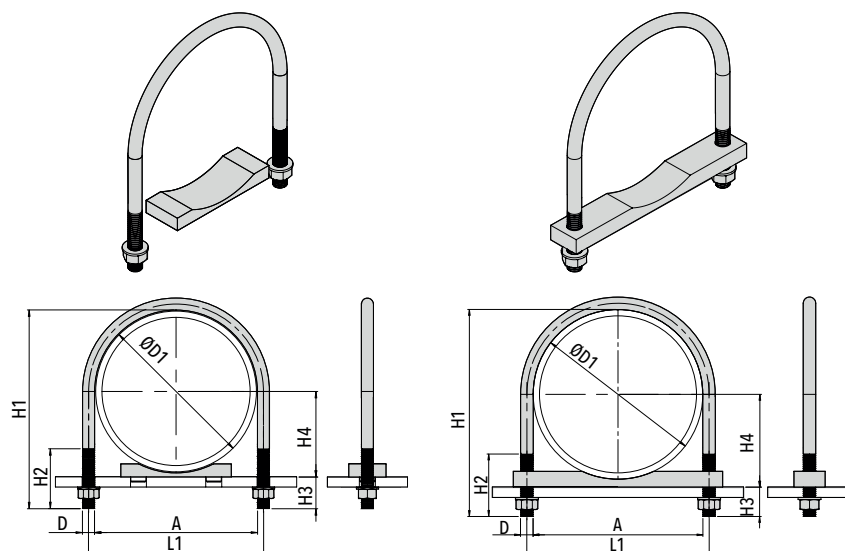

Code	Outside diameter ØD1		DN	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	(DN 6-15 no saddle)	
	(mm)	(in)							H3	H4
CM-21.3-M3	21,3	1/2"	15	M8	22 (.87")	30 (1.18")	52 (2.05")	30 (1.18")	30,7 (1.21")	10,65 (.42")

Code	Outside diameter ØD1		DN	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	With short saddle BC		With long saddle BL	
	(mm)	(in)							H3	H4	H3	H4
CM-26.9-M3	26,9	3/4"	20	M8	27 (1.06")	35 (1.38")	56 (2.20")	30 (1.18")	24,1 (.95")	18,45 (.73")	24,1 (.95")	18,45 (.73")
CM-33.7-M3	33,7	1"	25	M8	34 (1.34")	42 (1.65")	64 (2.52")	30 (1.18")	25,3 (1")	21,85 (.86")	25,3 (1")	21,85 (.86")
CM-42.4-M3	42,4	1.1/4"	32	M8	43 (1.70")	51 (2.01")	72 (2.83")	30 (1.18")	24,6 (.97")	26,2 (1.03")	24,6 (.97")	26,2 (1.03")
CM-48.3-M3	48,3	1.1/2"	40	M10	49 (1.93")	59 (2.32")	82 (3.23")	40 (1.57")	28,7 (1.13")	29,15 (1.15")	28,7 (1.13")	29,15 (1.15")
CM-60.3-M3	60,3	2"	50	M10	61 (2.40")	71 (2.80")	94 (3.70")	40 (1.57")	28,7 (1.13")	35,15 (1.38")	28,7 (1.13")	35,15 (1.38")
CM-76.1-M3	76,1	2.1/2"	65	M10	77 (3.03")	87 (3.43")	110 (4.33")	40 (1.57")	28,9 (1.14")	43 (1.69")	28,9 (1.14")	43 (1.69")
CM-88.9-M3	88,9	3"	80	M10	89 (3.50")	99 (3.90")	122 (4.80")	40 (1.57")	25,1 (.99")	52,45 (2.06")	28,1 (1.11")	49,45 (1.95")
CM-102-M3	102	3.1/2"	90	M12	102 (4.02")	114 (4.49")	142 (5.59")	50 (1.97")	32 (1.26")	59 (2.32")	32 (1.26")	61 (2.40")
CM-114.3-M3	114,3	4"	100	M12	115 (4.53")	127 (5")	156 (6.14")	50 (1.97")	33,7 (1.33")	65,15 (2.56")	31,7 (1.25")	67,15 (2.64")
CM-139.7-M3	139,7	5"	125	M12	140 (5.51")	152 (5.98")	180 (7.09")	50 (1.97")	32,3 (1.27")	78,85 (3.10")	30,3 (1.19")	79,85 (3.14")
CM-168-M3	168	6"	150	M12	168 (6.61")	180 (7.09")	208 (8.19")	50 (1.97")	32 (1.26")	92 (3.62")	30 (1.18")	94 (3.70")
CM-219-M3	219	8"	200	M16	220 (8.66")	236 (9.29")	267 (10.51")	60 (2.36")	40 (1.57")	118 (4.65")	38 (1.50")	120 (4.72")
CM-273-M3	273	10"	250	M16	274 (10.78")	290 (11.42")	321 (12.64")	60 (2.36")	39 (1.54")	145 (5.71")	37 (1.46")	147 (5.79")
CM-324-M3	324	12"	350	M20	324 (12.76")	344 (13.54")	379 (14.92")	70 (2.76")	47 (1.85")	170 (6.69")	40 (1.57")	177 (6.97")
CM-356-M3	356	14"	350	M20	356 (14.02")	376 (14.80")	411 (16.18")	70 (2.76")	47 (1.85")	186 (7.32")	40 (1.57")	193 (7.60")
CM-406.4-M3	406,4	16"	400	M20	408 (16.06")	428 (16.85")	463 (18.23")	70 (2.76")	48,6 (1.91")	211,2 (8.31")	41,6 (1.64")	218,2 (8.59")
CM-457.2-M3	457,2	18"	450	M20	460 (18.11")	480 (18.90")	515 (20.28")	70 (2.76")	49,8 (1.97")	236,6 (9.31")	42,8 (1.69")	243,6 (9.59")
CM-508-M3	508	20"	500	M20	510 (20.08")	530 (20.87")	565 (22.24")	70 (2.76")	49 (1.93")	262 (10.31")	42 (1.65")	269 (10.59")
CM-609.6-M3	609,6	24"	600	M20	612 (24.09")	632 (24.88")	667 (26.26")	70 (2.76")	-	-	42,4 (1.67")	319,8 (12.59")



CP Cavallotto pesante


CP Heavy round U-bolt

CP Abarcón pesado

Con 2 dadi e 2 rondelle

With 2 nuts and 2 washers

Con 2 tuercas y 2 arandelas

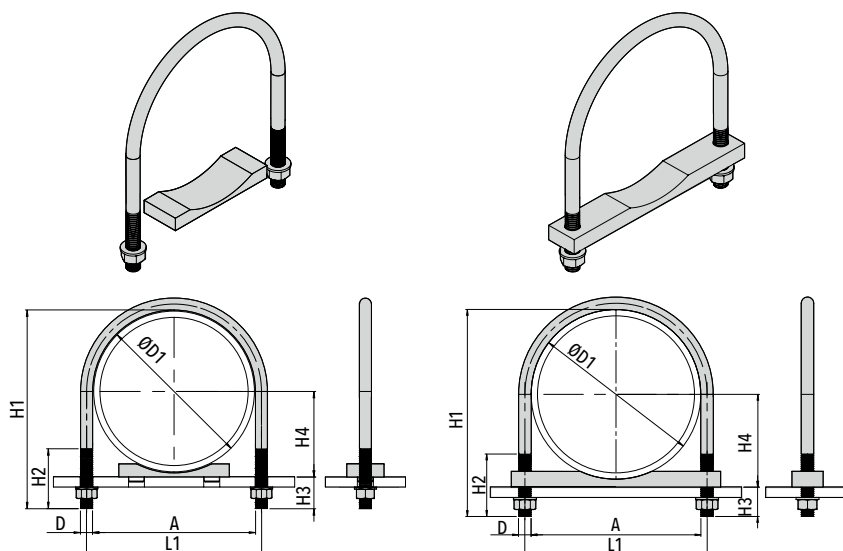

Code	Outside diameter ØD1		DN	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	(DN 6-15 no saddle)	
	(mm)	(in)							H3	H4
CP-21.3-M3	21,3	1/2"	15	M10	22 (.87")	32 (1.26")	60 (2.36")	40 (1.57")	38,7 (1.52")	10,65 (.42")

Code	Outside diameter ØD1		DN	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	With short saddle BC		With long saddle BL	
	(mm)	(in)							H3	H4	H3	H4
CP-26.9-M3	26,9	3/4"	20	M10	27 (1.06")	37 (1.46")	66 (2.60")	40 (1.57")	34,1 (1.34")	18,45 (.73")	34,1 (1.34")	18,45 (.73")
CP-33.7-M3	33,7	1"	25	M10	34 (1.34")	44 (1.73")	72 (2.83")	40 (1.57")	33,3 (1.31")	21,85 (.86")	33,3 (1.31")	21,85 (.86")
CP-42.4-M3	42,4	1.1/4"	32	M10	43 (1.70")	53 (2.08")	82 (3.23")	40 (1.57")	34,6 (1.36")	26,2 (1.03")	34,6 (1.36")	26,2 (1.03")
CP-48.3-M3	48,3	1.1/2"	40	M12	49 (1.93")	61 (2.40")	100 (3.94")	60 (2.36")	46,7 (1.84")	29,15 (1.15")	46,7 (1.84")	29,15 (1.15")
CP-60.3-M3	60,3	2"	50	M12	61 (2.40")	73 (2.87")	112 (4.41")	60 (2.36")	46,7 (1.84")	35,15 (1.38")	46,7 (1.84")	35,15 (1.38")
CP-76.1-M3	76,1	2.1/2"	65	M12	77 (3.03")	89 (3.50")	128 (5.04")	60 (2.36")	46,9 (1.85")	43 (1.69")	46,9 (1.85")	43 (1.69")
CP-88.9-M3	88,9	3"	80	M12	89 (3.50")	101 (3.98")	140 (5.51")	60 (2.36")	43,1 (1.70")	52,45 (2.06")	46,1 (1.81")	49,45 (1.95")
CP-102-M3	102	3.1/2"	90	M16	102 (4.02")	118 (4.65")	159 (6.26")	70 (2.76")	49 (1.93")	59 (2.32")	47 (1.85")	61 (2.40")
CP-114.3-M3	114,3	4"	100	M16	115 (4.53")	131 (5.16")	173 (6.81")	70 (2.76")	50,7 (2")	65,15 (2.56")	48,7 (1.92")	67,15 (2.64")
CP-139.7-M3	139,7	5"	125	M16	140 (5.51")	156 (6.14")	197 (7.76")	70 (2.76")	49,3 (1.94")	78,85 (3.10")	47,3 (1.86")	79,85 (3.14")
CP-168-M3	168	6"	150	M16	168 (6.61")	184 (7.24")	225 (8.86")	70 (2.76")	49 (1.93")	92 (3.62")	47 (1.85")	94 (3.70")
CP-219-M3	219	8"	200	M20	220 (8.66")	240 (9.45")	285 (11.22")	80 (3.15")	57 (2.24")	117,5 (4.63")	55 (2.17")	119,5 (4.70")
CP-273-M3	273	10"	250	M20	274 (10.78")	294 (11.57")	339 (13.35")	80 (3.15")	58 (2.28")	144,5 (5.69")	56 (2.20")	146,5 (5.77")
CP-324-M3	324	12"	350	M24	324 (12.76")	348 (13.70")	396 (15.59")	90 (3.54")	64 (2.52")	170 (6.69")	57 (2.24")	177 (6.97")
CP-356-M3	356	14"	350	M24	356 (14.02")	380 (14.96")	428 (16.85")	90 (3.54")	64 (2.52")	186 (7.32")	57 (2.24")	193 (7.60")
CP-406.4-M3	406,4	16"	400	M24	408 (16.06")	432 (17.01")	480 (18.90")	90 (3.54")	65,6 (2.58")	211,2 (8.31")	58,6 (2.31")	218,2 (8.59")
CP-457.2-M3	457,2	18"	450	M24	460 (18.11")	484 (19.06")	532 (20.94")	90 (3.54")	66,8 (2.63")	236,6 (9.31")	59,8 (2.35")	243,6 (9.59")
CP-508-M3	508	20"	500	M24	510 (20.08")	534 (21.02")	582 (22.91")	90 (3.54")	66 (2.60")	262 (10.31")	59 (2.32")	269 (10.59")
CP-609.6-M3	609,6	24"	600	M24	612 (24.09")	636 (25.04")	684 (26.93")	90 (3.54")	-	-	59,4 (2.34")	319,8 (12.59")

CZF Cavallotto


CZF Round U-bolt

CZF Abarcón

Con 2 dadi flangiati DIN 6923

With 2 flanged nuts DIN 6923

Con 2 tuercas bridadas DIN 6923

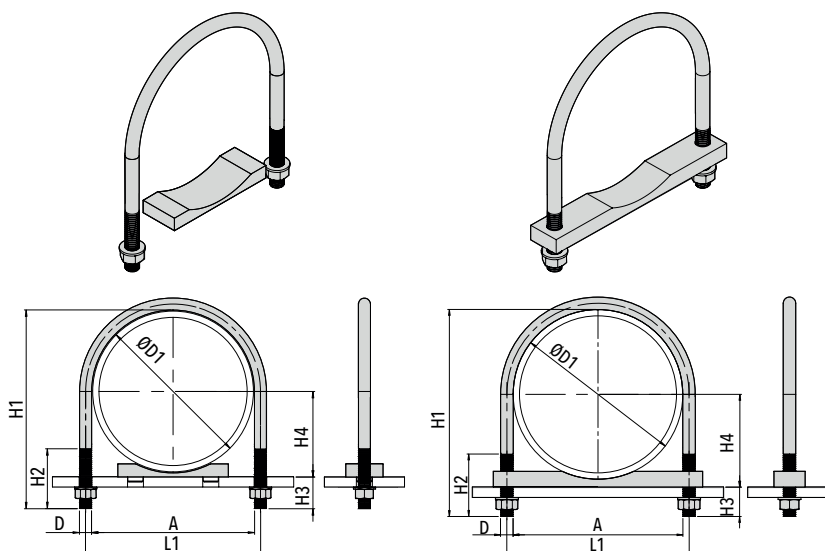

Code	Outside diameter ØD1		DN	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	(DN 6-15 no saddle)	
	(mm)	(in)							H3	H4
CZF-10-M3	10	1/8"	6	M6	11 (.43")	17 (.67")	31 (1.22")	19 (.75")	21 (.83")	5 (.20")
CZF-13.5-M3	13,5	1/4"	8	M6	14 (.56")	20 (.78")	34 (1.34")	19 (.75")	20,5 (.81")	6,75 (.27")
CZF-17.2-M3	17,2	3/8"	10	M6	18 (.70")	24 (.94")	37 (1.46")	19 (.75")	19,8 (.78")	8,6 (.34")
CZF-21.3-M3	21,3	1/2"	15	M6	22 (.87")	28 (1.10")	43 (1.70")	25 (.98")	21,7 (.85")	10,65 (.42")

Code	Outside diameter ØD1		DN	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	With short saddle BC		With long saddle BL	
	(mm)	(in)							H3	H4	H3	H4
CZF-26.9-M3	26,9	3/4"	20	M6	27 (1.06")	33 (1.30")	47 (1.85")	25 (.98")	15 (.60")	18,45 (.73")	15 (.60")	18,45 (.73")
CZF-33.7-M3	33,7	1"	25	M6	34 (1.34")	40 (1.57")	55 (2.17")	25 (.98")	16,43 (.65")	21,85 (.86")	16,43 (.65")	21,85 (.86")
CZF-42.4-M3	42,4	1.1/4"	32	M6	43 (1.70")	49 (1.93")	63 (2.48")	25 (.98")	15,46 (.61")	26,2 (1.03")	15,46 (.61")	26,2 (1.03")
CZF-48.3-M3	48,3	1.1/2"	40	M8	49 (1.93")	57 (2.24")	73 (2.87")	30 (1.18")	19,7 (.78")	29,15 (1.15")	19,7 (.78")	29,15 (1.15")
CZF-60.3-M3	60,3	2"	50	M8	61 (2.40")	69 (2.72")	85 (3.35")	30 (1.18")	19,7 (.78")	35,15 (1.38")	19,7 (.78")	35,15 (1.38")
CZF-76.1-M3	76,1	2.1/2"	65	M8	77 (3.03")	85 (3.35")	101 (3.98")	30 (1.18")	19,9 (.78")	43 (1.69")	19,9 (.78")	43 (1.69")
CZF-88.9-M3	88,9	3"	80	M8	89 (3.50")	97 (3.82")	113 (4.45")	30 (1.18")	16,1 (.63")	52,45 (2.06")	16,1 (.63")	52,45 (2.06")
CZF-102-M3	102	3.1/2"	90	M8	102 (4.02")	110 (4.33")	130 (5.12")	35 (1.38")	20 (.79")	59 (2.32")	18 (.71")	61 (2.40")
CZF-114.3-M3	114,3	4"	100	M10	115 (4.53")	125 (4.92")	142 (5.59")	35 (1.38")	19 (.75")	65,15 (2.56")	17 (.67")	67,15 (2.64")
CZF-139.7-M3	139,7	5"	125	M10	140 (5.51")	150 (5.91")	169 (6.65")	35 (1.38")	21 (.83")	78,85 (3.10")	19 (.75")	79,85 (3.14")
CZF-168-M3	168	6"	150	M10	168 (6.61")	178 (7.01")	202 (7.95")	45 (1.77")	26 (1.02")	92 (3.62")	24 (.94")	94 (3.70")
CZF-219-M3	219	8"	200	M10	220 (8.66")	230 (9.06")	254 (10")	45 (1.77")	27 (1.06")	117,5 (4.63")	25 (.98")	119,5 (4.70")
CZF-273-M3	273	10"	250	M10	274 (10.78")	284 (11.18")	308 (12.13")	45 (1.77")	27 (1.06")	144 (5.67")	25 (.98")	146 (5.75")



XCL Cavallotto leggero


XCL Lightweight round U-bolt

XCL Abarcón ligero

Con 2 dadi e 2 rondelle

With 2 nuts and 2 washers

Con 2 tuercas y 2 arandelas

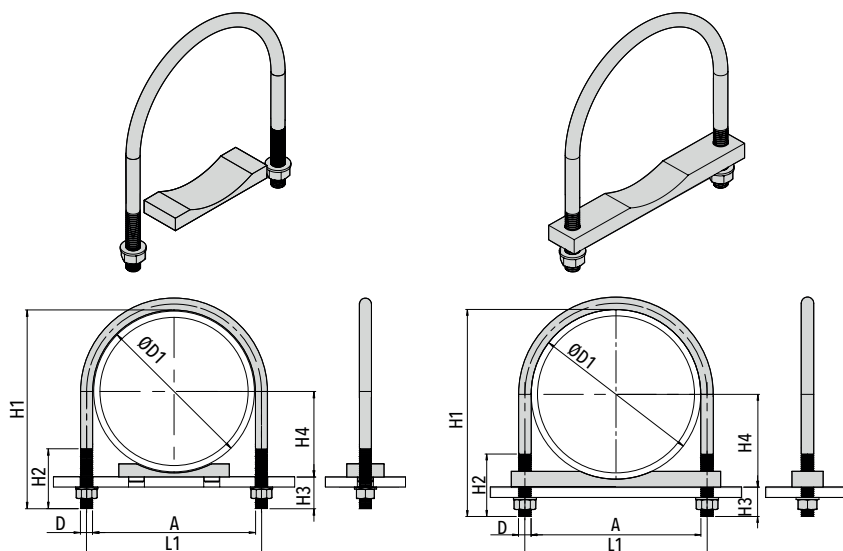

Code	Outside diameter ØD1		DN	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	(DN 6-15 no saddle)	
	(mm)	(in)							H3	H4
CL-10-M5	10	1/8"	6	M6	11 (.43")	17 (.67")	29 (1.14")	16 (.63")	19 (.75")	5 (.20")
CL-13.5-M5	13,5	1/4"	8	M6	14 (.56")	20 (.78")	32 (1.26")	16 (.63")	18,5 (.73")	6,75 (.27")
CL-17.2-M5	17,2	3/8"	10	M6	18 (.70")	24 (.94")	36 (1.42")	16 (.63")	18,8 (.74")	8,6 (.34")
CL-21.3-M5	21,3	1/2"	15	M6	22 (.87")	28 (1.10")	40 (1.57")	18 (.70")	18,7 (.74")	10,65 (.42")

Code	Outside diameter ØD1		DN	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	With short saddle BC		With long saddle BL	
	(mm)	(in)							H3	H4	H3	H4
CL-26.9-M5	26,9	3/4"	20	M6	27 (1.06")	33 (1.30")	45 (1.77")	18 (.71")	13,1 (.52")	18,45 (.73")	13,1 (.52")	18,45 (.73")
CL-33.7-M5	33,7	1"	25	M6	34 (1.34")	40 (1.57")	52 (2.05")	18 (.71")	13,3 (.52")	21,85 (1.65")	13,3 (.52")	21,85 (1.65")
CL-42.4-M5	42,4	1.1/4"	32	M6	43 (1.70")	49 (1.93")	61 (2.40")	18 (.71")	13,6 (.54")	26,2 (1.03")	13,6 (.54")	26,2 (1.03")
CL-48.3-M5	48,3	1.1/2"	40	M8	49 (1.93")	57 (2.24")	70 (2.76")	28 (1.10")	16,7 (.66")	29,15 (1.15")	16,7 (.66")	29,15 (1.15")
CL-60.3-M5	60,3	2"	50	M8	61 (2.40")	69 (2.72")	82 (3.23")	28 (1.10")	16,7 (.66")	35,15 (1.38")	16,7 (.66")	35,15 (1.38")
CL-76.1-M5	76,1	2.1/2"	65	M8	77 (3.03")	85 (3.35")	98 (3.86")	28 (1.10")	16,9 (.67")	43 (1.69")	16,9 (.67")	43 (1.69")
CL-88.9-M5	88,9	3"	80	M8	89 (3.50")	97 (3.82")	110 (4.33")	28 (1.10")	13,1 (.52")	52,45 (2.06")	16,1 (.63")	52,45 (2.06")
CL-102-M5	102	3.1/2"	90	M8	102 (4.02")	110 (4.33")	127 (5")	35 (1.38")	17 (.67")	59 (2.32")	15 (.60")	61 (2.40")
CL-114.3-M5	114,3	4"	100	M8	115 (4.53")	123 (4.84")	139 (5.47")	35 (1.38")	16,7 (.66")	65,15 (2.56")	14,7 (.58")	67,15 (2.64")
CL-139.7-M5	139,7	5"	125	M8	140 (5.51")	148 (5.83")	165 (6.50")	35 (1.38")	17,3 (.68")	78,85 (3.10")	15,3 (.60")	79,85 (3.14")
CL-168-M5	168	6"	150	M10	168 (6.61")	178 (7.01")	196 (7.72")	45 (1.77")	20 (.79")	92 (3.62")	18 (.71")	94 (3.70")
CL-219-M5	219	8"	200	M10	220 (8.66")	230 (9.06")	248 (9.76")	45 (1.77")	20 (.79")	117,5 (4.63")	18 (.71")	119,5 (4.70")
CL-273-M5	273	10"	250	M10	274 (10.78")	284 (11.18")	302 (11.89")	45 (1.77")	21 (.83")	144,5 (5.69")	19 (.75")	146,5 (5.77")

XCM Cavallotto medio


XCM Medium round U-bolt

XCM Abarcón medio

Con 2 dadi e 2 rondelle

With 2 nuts and 2 washers

Con 2 tuercas y 2 arandelas

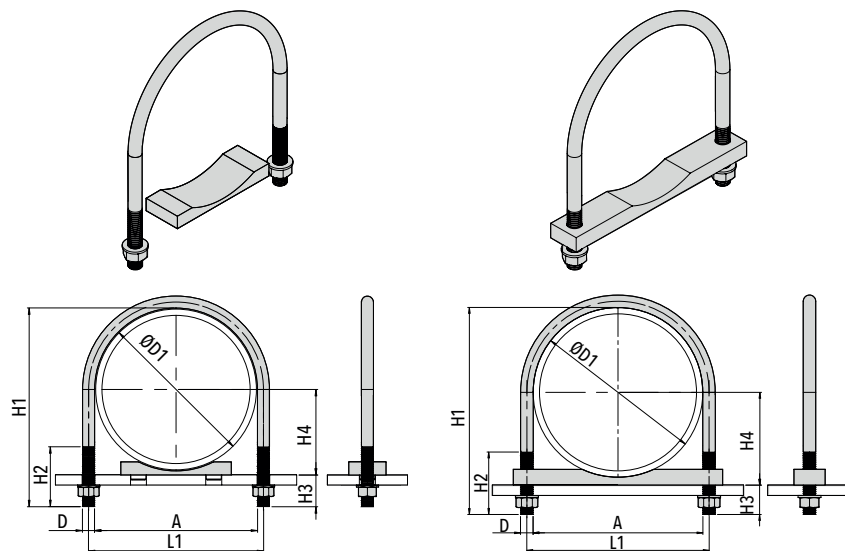

Code	Outside diameter ØD1		DN	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	(DN 6-15 no saddle)	
	(mm)	(in)							H3	H4
CM-21.3-M6	21,3	1/2"	15	M8	22 (.87")	30 (1.18")	48 (1.89")	25 (.98")	26,7 (1.05")	10,65 (.42")

Code	Outside diameter ØD1		DN	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	With short saddle BC		With long saddle BL	
	(mm)	(in)							H3	H4	H3	H4
CM-26.9-M6	26,9	3/4"	20	M8	27 (1.06")	35 (1.38")	52 (2.05")	25 (.98")	20 (.79")	18,45 (.73")	20 (.79")	18,45 (.73")
CM-33.7-M6	33,7	1"	25	M8	34 (1.34")	42 (1.65")	60 (2.36")	25 (.98")	21,3 (.84")	21,85 (.86")	21,3 (.84")	21,85 (.86")
CM-42.4-M6	42,4	1.1/4"	32	M8	43 (1.70")	51 (2.01")	68 (2.68")	25 (.98")	20,6 (.81")	26,2 (1.03")	20,6 (.81")	26,2 (1.03")
CM-48.3-M6	48,3	1.1/2"	40	M10	49 (1.93")	59 (2.32")	78 (3.07")	36 (1.42")	24,7 (.97")	29,15 (1.15")	24,7 (.97")	29,15 (1.15")
CM-60.3-M6	60,3	2"	50	M10	61 (2.40")	71 (2.80")	90 (3.54")	36 (1.42")	24,7 (.97")	35,15 (1.38")	24,7 (.97")	35,15 (1.38")
CM-76.1-M6	76,1	2.1/2"	65	M10	77 (3.03")	87 (3.43")	106 (4.17")	36 (1.42")	24,9 (.98")	43 (1.69")	24,9 (.98")	43 (1.69")
CM-88.9-M6	88,9	3"	80	M10	89 (3.50")	99 (3.90")	118 (4.65")	36 (1.42")	21 (.83")	52,45 (2.06")	24 (.94")	49,45 (1.95")



XCP Cavallotto pesante


XCP Heaby round U-bolt

XCP Abarcón pesado

Con 2 dadi e 2 rondelle

With 2 nuts and 2 washers

Con 2 tuercas y 2 arandelas

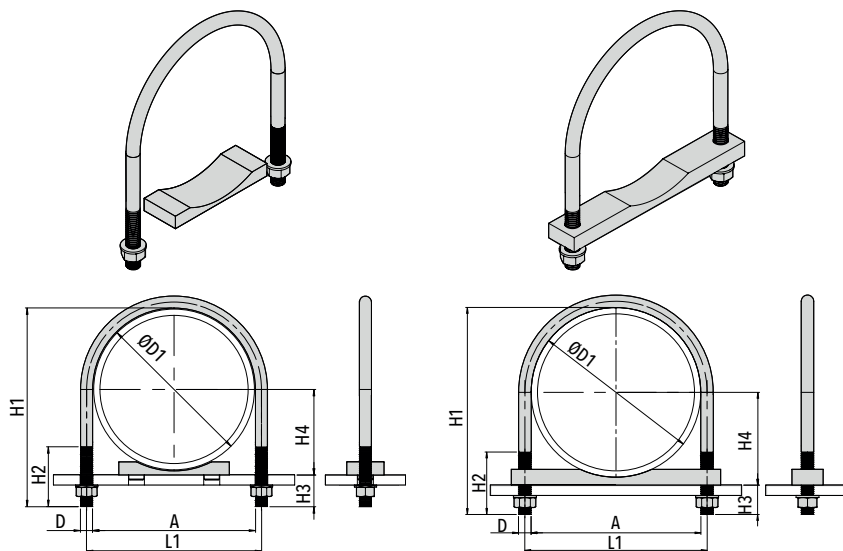

Code	Outside diameter ØD1		DN	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	(DN 6-15 no saddle)	
	(mm)	(in)							H3	H4
CP-21.3-M5	21,3	1/2"	15	M8	22 (.87")	30 (1.18")	48 (1.89")	25 (.98")	26,7 (1.05")	10,65 (.42")


Code	Outside diameter ØD1		DN	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	With short saddle BC		With long saddle BL	
	(mm)	(in)							H3	H4	H3	H4
CP-26.9-M5	26,9	3/4"	20	M8	27 (1.06")	35 (1.38")	52 (2.05")	25 (.98")	20 (.79")	18,45 (.73")	20 (.79")	18,45 (.73")
CP-33.7-M5	33,7	1"	25	M8	34 (1.34")	42 (1.65")	60 (2.36")	25 (.98")	21,3 (.84")	21,85 (.86")	21,3 (.84")	21,85 (.86")
CP-42.4-M5	42,4	1.1/4"	32	M8	43 (1.70")	51 (2.01")	68 (2.68")	25 (.98")	20,6 (.81")	26,2 (1.03")	20,6 (.81")	26,2 (1.03")
CP-48.3-M5	48,3	1.1/2"	40	M10	49 (1.93")	59 (2.32")	78 (3.07")	36 (1.42")	24,7 (.97")	29,15 (1.15")	24,7 (.97")	29,15 (1.15")
CP-60.3-M5	60,3	2"	50	M10	61 (2.40")	71 (2.80")	90 (3.54")	36 (1.42")	24,7 (.97")	35,15 (1.38")	24,7 (.97")	35,15 (1.38")
CP-76.1-M5	76,1	2.1/2"	65	M10	77 (3.03")	87 (3.43")	106 (4.17")	36 (1.42")	24,9 (.98")	43 (1.69")	24,9 (.98")	43 (1.69")
CP-88.9-M5	88,9	3"	80	M10	89 (3.50")	99 (3.90")	118 (4.65")	36 (1.42")	21 (.83")	52,45 (2.06")	24 (.94")	49,45 (1.95")
CP-102-M5	102	3.1/2"	90	M12	102 (4.02")	114 (4.49")	137 (5.39")	45 (1.77")	27 (1.06")	59 (2.32")	25 (.98")	61 (2.40")
CP-114.3-M5	114,3	4"	100	M12	115 (4.53")	127 (5")	151 (5.94")	45 (1.77")	28,7 (1.13")	65,15 (2.56")	26,7 (1.05")	67,15 (2.64")
CP-139.7-M5	139,7	5"	125	M12	140 (5.51")	152 (5.98")	175 (6.89")	45 (1.77")	27,3 (1.07")	78,85 (3.10")	25,3 (1")	79,85 (3.14")




BC Base corta in plastica per tubo

BC Short plastic pipe saddle


BC Base corto de plástico para tubo



TIPO 5-8



TIPO 9-22




Code	Outside diameter ØD1		L2	L3	B	H5	H6	H7	ØD2
	(mm)	(in)	(mm/in)	(mm/in)	(mm/in)	(mm/in)	(mm/in)	(mm/in)	(mm/in)
BC-05-08-PP	26,9 ÷ 48,3	3/4" ÷ 1.1/2"	35 (1.38")	25 (.98")	24 (.94")	5 (.19")	8 (.31")	5 (.19")	8 (.31")
BC-09-10-PP	60,3 ÷ 76,1	2" ÷ 2.1/2"	38 (1.49")	25 (.98")	50 (1.96")	5 (.19")	10 (.39")	6 (.23")	10 (.39")
BC-11-14-PP	88,9 ÷ 139,7	3" ÷ 5"	75 (2.95")	40 PP / 40,5 PA (1.57" PP / 1.59" PA")	70 (2.75")	8 (.31")	17 (.67")	10 (.39")	15 (.59")
BC-15-17-PP	168 ÷ 273	6" ÷ 10"	140 (5.51")	90 PP / 91 PA (1.57" PP / 1.59" PA")	75 (2.95")	8 (.31")	26 (1.02")	10 (.39")	25 (.98")
BC-18-23-PP	324 ÷ 508	12" ÷ 20"	220 (8.66")	150 PP / 152 PA (5.90" PP / 5.98" PA")	75 (2.95")	8 (.31")	32 (1.26")	10 (.39")	30 (1.18")



BL Base lunga in plastica per tubo

BL Long plastic pipe saddle

BC Base largo de plástico para tubo

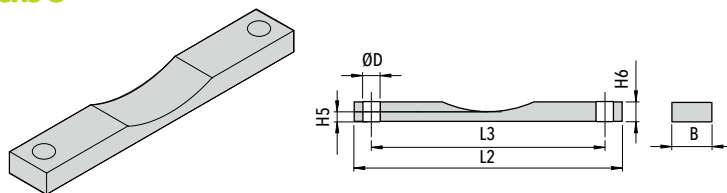

Code	Outside diameter ØD1		L2	L3	B	H5	H6	ØD
	(mm)	(in)	(mm/in)	(mm/in)	(mm/in)	(mm/in)	(mm/in)	(mm/in)
BL-05-PP	26,9	3/4"	70 (2.75")	37 (1.45")	30 (1.18")	5 (.19")	12 (.47")	11 (.43")
BL-06-PP	33,7	1"	75 (2.95")	43 (1.69")	30 (1.18")	5 (.19")	12 (.47")	11 (.43")
BL-07-PP	42,4	1.1/4"	75 (2.95")	52 (2.04")	30 (1.18")	5 (.19")	12 (.47")	11 (.43")
BL-08-PP	48,3	1.1/2"	95 (3.74")	60 (2.36")	35 (1.37")	5 (.19")	15 (.59")	13 (.51")
BL-09-PP	60,3	2"	95 (3.74")	72 (2.83")	35 (1.37")	5 (.19")	15 (.59")	13 (.51")
BL-10-PP	76,1	2.1/2"	115 (4.52")	88 (3.46")	35 (1.37")	5 (.19")	15 (.59")	13 (.51")
BL-11-PP	88,9	3"	135 (5.31")	100 (3.93")	35 (1.37")	5 (.19")	15 (.59")	13 (.51")
BL-12-PP	102	3.1/2"	150 (5.90")	117 (4.60")	40 (1.57")	10 (.39")	20 (.79")	18 (.70")
BL-13-PP	114,3	4"	185 (7.28")	131 (5.15")	40 (1.57")	10 (.39")	20 (.79")	18 (.70")
BL-14-PP	139,7	5"	210 (8.26")	154,5 (6.08")	40 (1.57")	10 (.39")	20 (.79")	18 (.70")
BL-15-PP	168	6"	220 (8.66")	182 (7.16")	40 (1.57")	10 (.39")	20 (.79")	18 (.70")
BL-16-PP	219	8"	280 (11.02")	240 (9.45")	50 (1.96")	10 (.39")	25 (.98")	22 (.86")
BL-17-PP	273	10"	350 (13.77")	294 (11.57")	50 (1.96")	10 (.39")	25 (.98")	22 (.86")
BL-18-PP	324	12"	420 (16.53")	348 (13.70")	60 (2.36")	15 (.59")	30 (1.18")	26 (1.02")
BL-19-PP	356	14"	460 (18.11")	380 (14.96")	60 (2.36")	15 (.59")	30 (1.18")	26 (1.02")
BL-20-PP	406,4	16"	510 (20.07")	432 (17")	60 (2.36")	15 (.59")	30 (1.18")	26 (1.02")
BL-21-PP	457,2	18"	550 (21.65")	484 (19.05")	60 (2.36")	15 (.59")	30 (1.18")	26 (1.02")
BL-22-PP	508	20"	600 (23.62")	534 (21.02")	60 (2.36")	15 (.59")	30 (1.18")	26 (1.02")
BL-23-PP	609,6	24"	700 (27.56")	636 (25.04")	60 (2.36")	15 (.59")	30 (1.18")	26 (1.02")



CD Cavallotto DIN 3570



CD U-bolt DIN 3570

CD Abarcón DIN 3570

Con 4 dadi e 2 rondelle

With 4 nuts and 2 washers

Con 4 tuercas y 2 arandelas

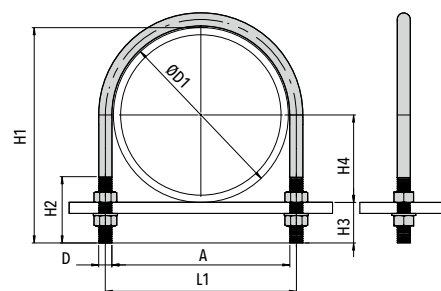

Code	Outside diameter ØD1		DN	A	L1	H1	H2	H3	H4	Thread D
	(mm)	(in)		(mm/in)	(mm/in)	(mm/in)	(mm/in)	(mm/in)	(mm/in)	
CD-26.9-M3	26,9	3/4"	20	30 (1.18")	40 (1.57")	60 (2.36")	40 (1.57")	33,1 (1.30")	13,5 (.53")	M10
CD-33.7-M3	33,7	1"	25	38 (1.49")	48 (1.89")	66 (2.60")	40 (1.57")	32,3 (1.27")	16,9 (.66")	M10
CD-42.4-M3	42,4	1.1/4"	32	46 (.43")	56 (2.20")	76 (2.99")	50 (1.97")	33,6 (1.32")	21,2 (.83")	M10
CD-48.3-M3	48,3	1.1/2"	40	52 (2.04")	62 (2.44")	82 (3.22")	50 (1.97")	33,7 (1.32")	24,2 (.95")	M10
CD-60.3-M3	60,3	2"	50	64 (2.52")	76 (2.99")	97 (3.82")	50 (1.97")	36,7 (1.44")	35,2 (1.38")	M12
CD-76.1-M3	76,1	2.1/2"	65	82 (3.23")	94 (3.70")	113 (4.45")	50 (1.97")	36,9 (1.45")	30,2 (1.19")	M12
CD-88.9-M3	88,9	3"	80	94 (3.70")	106 (4.17")	126 (4.96")	50 (1.97")	37,1 (1.46")	44,5 (1.75")	M12
CD-114.3-M3	114,3	4"	100	120 (4.72")	136 (4.17")	155 (6.10")	60 (2.36")	40,7 (1.60")	57,2 (2.25")	M16
CD-139.7-M3	139,7	5"	125	148 (5.82")	164 (6.45")	175 (6.89")	60 (2.36")	35,3 (1.39")	69,9 (2.75")	M16
CD-168-M3	168	6"	150	176 (6.93")	192 (7.56")	201 (7.91")	60 (2.36")	32,7 (1.28")	84,2 (3.31")	M16
CD-193.7-M3	193,7	7"	175	202 (7.95")	218 (8.58")	233 (9.17")	60 (2.36")	39,3 (1.54")	96,9 (3.81")	M16
CD-219-M3	219	8"	200	228 (8.97")	248 (9.76")	263 (10.35")	70 (2.75")	43,9 (1.73")	109,6 (4.31")	M20
CD-273-M3	273	10"	250	282 (11.10")	302 (11.89")	314 (12.36")	70 (2.75")	41 (1.61")	136,5 (5.37")	M20
CD-324-M3	324	12"	300	332 (13.07")	352 (13.86")	365 (14.37")	70 (2.75")	41 (1.61")	162 (6.37")	M20
CD-356-M3	356	14"	350	378 (14.88")	402 (15.82")	411 (16.18")	70 (2.75")	55 (2.16")	178 (7")	M24
CD-406.4-M3	406,4	16"	400	428 (16.85")	452 (17.79")	463 (18.23")	70 (2.75")	56,6 (2.23")	203,2 (8")	M24
CD-508-M3	508	20"	500	530 (20.86")	554 (21.81")	565 (22.24")	70 (2.75")	57 (2.24")	254 (10")	M24



CQL Cavallotto quadrato leggero



CQL Lightweight square U-bolt

CQL Abarcón cuadrado ligero

Senza dadi DM e rondelle RM (ordinabili a parte)

Without DM nuts and RM washers (available separately)

Sin tuercas DM y arandelas RM (disponibles por separado)

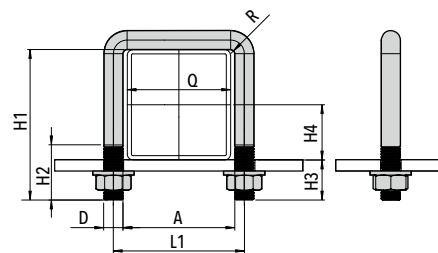

Code	Pipe size Q (mm/in)	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	H3 (mm/in)	H4 (mm/in)	R (mm/in)
CQL-30X30-M3	30x30 (1.18"x1.18")	M8	31 (1.22")	39 (1.54")	50 (1.97")	25 (.98")	20 (.79")	15 (.59")	4 (.16")
CQL-40X40-M3	40x40 (1.57"x1.57")	M8	41 (1.61")	49 (1.93")	60 (2.36")	25 (.98")	20 (.79")	20 (.79")	4 (.16")
CQL-50X50-M3	50x50 (1.97"x1.97")	M8	51 (2.01")	59 (2.32")	70 (2.76")	25 (.98")	20 (.79")	25 (.98")	4 (.16")
CQL-60X60-M3	60x60 (2.36"x2.36")	M10	61 (2.40")	71 (2.80")	82 (3.22")	30 (1.18")	22 (.87")	30 (1.18")	5 (.20")
CQL-70X70-M3	70x70 (2.76"x2.76")	M10	71 (2.80")	81 (3.19")	92 (3.62")	30 (1.18")	22 (.87")	35 (1.38")	5 (.20")
CQL-80X80-M3	80x80 (3.15"x3.15")	M10	81 (3.19")	91 (3.58")	102 (4.02")	30 (1.18")	22 (.87")	40 (1.57")	5 (.20")
CQL-90X90-M3	90x90 (3.54"x3.54")	M10	91 (3.58")	101 (3.98")	112 (4.41")	30 (1.18")	22 (.87")	45 (1.77")	5 (.20")
CQL-100X100-M3	100x100 (3.94"x3.94")	M10	101 (3.98")	111 (4.37")	122 (4.80")	30 (1.18")	22 (.87")	50 (1.97")	5 (.20")

CQM Cavallotto quadrato medio



CQM Medium square U-bolt

CQM Abarcón cuadrado medio

Senza dadi DM e rondelle RM (ordinabili a parte)

Without DM nuts and RM washers (available separately)

Sin tuercas DM y arandelas RM (disponibles por separado)

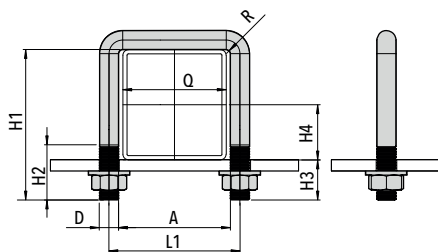

Code	Pipe size Q (mm/in)	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	H3 (mm/in)	H4 (mm/in)	R (mm/in)
CQM-30X30-M3	30x30 (1.18"x1.18")	M10	31 (1.22")	41 (1.61")	52 (2.05")	30 (1.18")	22 (.87")	15 (.59")	5 (.20")
CQM-40X40-M3	40x40 (1.57"x1.57")	M10	41 (1.61")	51 (2.01")	62 (2.44")	30 (1.18")	22 (.87")	20 (.79")	5 (.20")
CQM-50X50-M3	50x50 (1.97"x1.97")	M10	51 (2.01")	61 (2.40")	72 (2.83")	30 (1.18")	22 (.87")	25 (.98")	5 (.20")
CQM-60X60-M3	60x60 (2.36"x2.36")	M12	61 (2.40")	73 (2.87")	86 (3.39")	35 (1.38")	26 (1.02")	30 (1.18")	6 (.24")
CQM-70X70-M3	70x70 (2.76"x2.76")	M12	71 (2.80")	83 (3.27")	96 (3.78")	35 (1.38")	26 (1.02")	35 (1.38")	6 (.24")
CQM-80X80-M3	80x80 (3.15"x3.15")	M12	81 (3.19")	93 (3.66")	106 (4.17")	35 (1.38")	26 (1.02")	40 (1.57")	6 (.24")
CQM-90X90-M3	90x90 (3.54"x3.54")	M12	91 (3.58")	103 (4.06")	116 (4.57")	35 (1.38")	26 (1.02")	45 (1.77")	6 (.24")
CQM-100X100-M3	100x100 (3.94"x3.94")	M12	101 (3.98")	113 (4.45")	126 (4.96")	35 (1.38")	26 (1.02")	50 (1.97")	6 (.24")

CQP Cavallotto quadrato pesante



CQP Heavy square U-bolt

CQP Abarcón cuadrado pesado

Senza dadi DM e rondelle RM (ordinabili a parte)

Without DM nuts and RM washers (available separately)

Sin tuercas DM y arandelas RM (disponibles por separado)

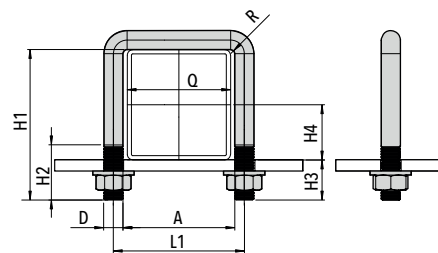

Code	Pipe size Q (mm/in)	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	H3 (mm/in)	H4 (mm/in)	R (mm/in)
CQP-30X30-M3	30x30 (1.18"x1.18")	M12	31 (1.22")	43 (1.69")	56 (2.20")	35 (1.38")	26 (1.02")	15 (.59")	6 (.24")
CQP-40X40-M3	40x40 (1.57"x1.57")	M12	41 (1.61")	53 (2.09")	66 (2.60")	35 (1.38")	26 (1.02")	20 (.79")	6 (.24")
CQP-50X50-M3	50x50 (1.97"x1.97")	M12	51 (2.01")	63 (2.48")	76 (2.99")	35 (1.38")	26 (1.02")	25 (.98")	6 (.24")
CQP-60X60-M3	60x60 (2.36"x2.36")	M14	61 (2.40")	75 (2.95")	90 (3.54")	40 (1.57")	30 (1.18")	30 (1.18")	7 (.28")
CQP-70X70-M3	70x70 (2.76"x2.76")	M14	71 (2.80")	85 (3.35")	100 (3.94")	40 (1.57")	30 (1.18")	35 (1.38")	7 (.28")
CQP-80X80-M3	80x80 (3.15"x3.15")	M14	81 (3.19")	95 (3.74")	110 (4.33")	40 (1.57")	30 (1.18")	40 (1.57")	7 (.28")
CQP-90X90-M3	90x90 (3.54"x3.54")	M14	91 (3.58")	105 (3.13")	120 (4.72")	40 (1.57")	30 (1.18")	45 (1.77")	7 (.28")
CQP-100X100-M3	100x100 (3.94"x3.94")	M14	101 (3.98")	115 (4.53")	130 (5.12")	40 (1.57")	30 (1.18")	50 (1.97")	7 (.28")

CQR Cavallotto quadrato robusto



CQR Robust square U-bolt

CQR Abarcón cuadrado robusto

Senza dadi DM e rondelle RM (ordinabili a parte)

Without DM nuts and RM washers (available separately)

Sin tuercas DM y arandelas RM (disponibles por separado)

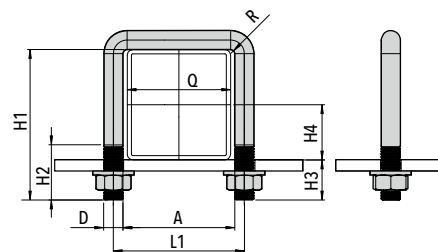

Code	Pipe size Q (mm/in)	Thread D	A (mm/in)	L1 (mm/in)	H1 (mm/in)	H2 (mm/in)	H3 (mm/in)	H4 (mm/in)	R (mm/in)
CQR-60X60-M3	60x60 (2.36"x2.36")	M16	61 (2.40")	77 (3.03")	94 (3.70")	50 (1.97")	34 (1.34")	30 (1.18")	8 (.31")
CQR-70X70-M3	70x70 (2.76"x2.76")	M16	71 (2.80")	87 (3.43")	104 (4.09")	50 (1.97")	34 (1.34")	35 (1.38")	8 (.31")
CQR-80X80-M3	80x80 (3.15"x3.15")	M16	81 (3.19")	97 (3.82")	114 (4.49")	50 (1.97")	34 (1.34")	40 (1.57")	8 (.31")
CQR-90X90-M3	90x90 (3.54"x3.54")	M16	91 (3.58")	107 (4.21")	124 (4.89")	50 (1.97")	34 (1.34")	45 (1.77")	8 (.31")
CQR-100X100-M3	100x100 (3.94"x3.94")	M16	101 (3.98")	117 (4.61")	134 (5.28")	50 (1.97")	34 (1.34")	50 (1.97")	8 (.31")
CQR-110X110-M3	110x110 (4.33"x4.33")	M16	111 (4.37")	127 (5")	144 (4.67")	50 (1.97")	34 (1.34")	55 (2.17")	8 (.31")
CQR-120X120-M3	120x120 (4.72"x4.72")	M16	121 (4.76")	137 (5.39")	154 (6.06")	50 (1.97")	34 (1.34")	60 (2.36")	8 (.31")

CFP Cavallotto a fascia piatta


CFP Flat steel U-bolt

CFP Abarcón con placa plana

Profilo a U in acciaio (DIN 1026) con base corta in plastica BC, 2 dadi e 2 viti

Stainless steel U profile (DIN 1026) with shor plastic saddle BC, 2 nuts and 2 screws

Perfil en U de acero (DIN 1026) con base de plástico corta BC, con 2 tuercas y 2 tornillos

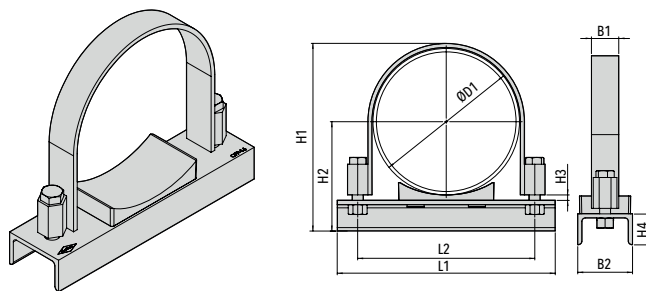

Code	Outside diameter ØD1		L1	L2	H1	H2	H3	B1	B2xH4	Screw DxL
	(mm)	(in)	(mm/in)	(mm/in)	(mm/in)	(mm/in)	(mm/in)	(mm/in)	(mm/in)	
CFP-08-PP	48,3	1.1/2"	100 (3.94")	76 (2.99")	95 (3.74")	67 (2.64")	5 (.20")	20x3 (.78"x.12")	50x38 (1.97"x1.50")	M10x40
CFP-09-PP	60,3	2"	115 (4.53")	88 (3.46")	106 (4.17")	73,2 (2.88")	5 (.20")	20x3 (.78"x.12")	50x38 (1.97"x1.50")	M10x40
CFP-10-PP	76,1	2.1/2"	132 (5.20")	104 (4.09")	122 (4.80")	81 (3.19")	5 (.20")	20x3 (.78"x.12")	50x38 (1.97"x1.50")	M10x40
CFP-11-PP	88,9	3"	160 (6.30")	122 (4.80")	146 (5.75")	97,5 (3.84")	8 (.31")	40x4 (1.57"x.16")	80x45 (3.15"x1.77")	M12x55
CFP-12-PP	102	3.1/2"	170 (6.69")	134 (5.27")	159 (6.26")	104 (4.09")	8 (.31")	40x4 (1.57"x.16")	80x45 (3.15"x1.77")	M12x55
CFP-13-PP	114,3	4"	180 (7.08")	147 (5.79")	171 (6.73")	110 (4.33")	8 (.31")	40x4 (1.57"x.16")	80x45 (3.15"x1.77")	M12x55
CFP-14-PP	139,7	5"	210 (8.27")	172 (6.77")	197 (7.76")	123 (4.84")	8 (.31")	40x4 (1.57"x.16")	80x45 (3.15"x1.77")	M12x55
CFP-15-PP	168	6"	275 (10.83")	211 (8.31")	230 (9.06")	137 (5.39")	8 (.31")	40x6 (1.57"x.24")	80x45 (3.15"x1.77")	M16x75
CFP-16-PP	219	8"	320 (12.60")	261 (10.27")	280 (11.02")	162,5 (6.40")	8 (.31")	40x6 (1.57"x.24")	80x45 (3.15"x1.77")	M16x75
CFP-17-PP	273	10"	385 (15.16")	330 (12.99")	334 (13.15")	189,5 (7.46")	8 (.31")	40x8 (1.57"x.31")	80x45 (3.15"x1.77")	M20x80
CFP-18-PP	324	12"	450 (17.72")	382 (15.04")	390 (15.35")	215 (8.46")	8 (.31")	40x8 (1.57"x.31")	80x45 (3.15"x1.77")	M20x80
CFP-19-PP	356	14"	480 (18.90")	420 (16.54")	421 (16.57")	235 (9.25")	12 (.47")	60x8 (2.36"x.31")	100x50 (3.94"x1.97")	M24x100
CFP-20-PP	406,4	16"	550 (21.65")	470 (18.50")	472 (18.58")	261 (10.28")	12 (.47")	60x8 (2.36"x.31")	100x50 (3.94"x1.97")	M24x100
CFP-21-PP	457,2	18"	585 (23.03")	520 (20.47")	523 (20.59")	286,5 (11.28")	12 (.47")	60x8 (2.36"x.31")	100x50 (3.94"x1.97")	M24x100
CFP-22-PP	508	20"	630 (24.80")	570 (22.40")	574 (22.60")	312 (12.28")	12 (.47")	60x8 (2.36"x.31")	100x50 (3.94"x1.97")	M24x100



