


# SAE 3000 PSI O-Ring Connector Plate

SAE J518 Code 61 (ISO 6162-1)

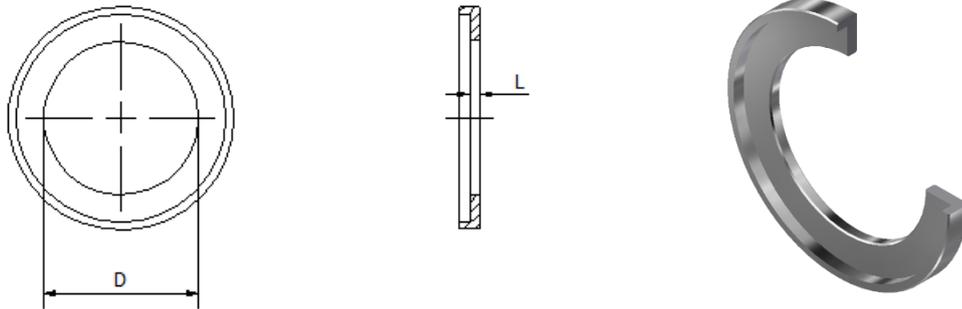

OCP - O-Ring Connector Plate				
Size	Connector Plate Part Number	Dimensions in (mm)		WT lbs (kg)
		D	L	
1/2"	OCP-050-*	0.50 (12.7)	0.13 (3.3)	0.04 (0.02)
3/4"	OCP-075-*	0.75 (19.1)	0.13 (3.3)	0.07 (0.03)
1"	OCP-100-*	0.94 (23.9)	0.13 (3.3)	0.08 (0.04)
1-1/4"	OCP-125-*	1.20 (30.5)	0.13 (3.3)	0.09 (0.04)
1-1/2"	OCP-150-*	1.50 (38.1)	0.13 (3.3)	0.17 (0.08)
2"	OCP-200-*	1.94 (49.3)	0.13 (3.3)	0.15 (0.07)
2-1/2"	OCP-250-*	2.36 (59.9)	0.13 (3.3)	0.17 (0.08)
3"	OCP-300-*	2.88 (73.2)	0.13 (3.3)	0.25 (0.11)

**\* Materials:**

Standard, No Designation = Carbon Steel,  
Zinc Nickel Plated.  
SS = Stainless Steel, Type 316.

Ordering Example: OCP-200-SS

\* Insert Material

3D step models available upon request

Introduction

Technical Data

Pipe Selection Guide

16 bar, 90° Flare

ANSI 150#, 300# Flare

SAE 1000, 70 bar

SAE 3000, 210 bar

SAE 6000, 420 bar

SAE 10000, 690 bar

ISO 6164, 400 bar

ISO 6164, 400 bar F10° Flare

Clamp Supports - Heavy Series

Valves, Ball and Check

