


**JIC MJ-MBSPPWD**

JIC 37° male / male BSPP with captive seal

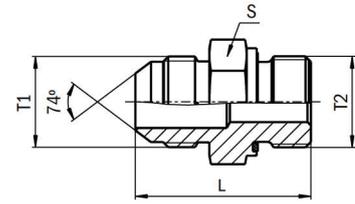

THREAD		LENGTH	HEX/FLATS	WORKING PRESSURE	ADAPTOR
T1	T2	L	S	WP	REF.
JIC	BSPP	mm	mm	bar	JIC
7/16"-20	1/8"-28	29.0	14.0	315	4MJ-2MBSPPWD
7/16"-20	1/4"-19	34.0	19.0	315	4MJ-4MBSPPWD
7/16"-20	3/8"-19	34.0	22.0	315	4MJ-6MBSPPWD
7/16"-20	1/2"-14	39.5	27.0	315	4MJ-8MBSPPWD
1/2"-20	1/8"-28	30.5	17.0	315	5MJ-2MBSPPWD
1/2"-20	1/4"-19	34.0	19.0	315	5MJ-4MBSPPWD
1/2"-20	3/8"-19	36.0	22.0	315	5MJ-6MBSPPWD
9/16"-18	1/8"-28	30.0	17.0	315	6MJ-2MBSPPWD
9/16"-18	1/4"-19	34.0	19.0	315	6MJ-4MBSPPWD
9/16"-18	3/8"-19	34.5	22.0	315	6MJ-6MBSPPWD
9/16"-18	1/2"-14	38.0	27.0	250	6MJ-8MBSPPWD
9/16"-18	3/4"-14	45.0	32.0	250	6MJ-12MBSPPWD
3/4"-16	1/4"-19	38.5	19.0	310	8MJ-4MBSPPWD
3/4"-16	3/8"-19	37.5	22.0	310	8MJ-6MBSPPWD
3/4"-16	1/2"-14	39.5	27.0	250	8MJ-8MBSPPWD
3/4"-16	3/4"-14	46.7	32.0	250	8MJ-12MBSPPWD
3/4"-16	1"-11	48.0	41.0	250	8MJ-16MBSPPWD
7/8"-14	3/8"-19	41.3	24.0	240	10MJ-6MBSPPWD
7/8"-14	1/2"-14	45.0	27.0	240	10MJ-8MBSPPWD
7/8"-14	3/4"-14	49.0	32.0	240	10MJ-12MBSPPWD
7/8"-14	1"-11	50.8	41.0	240	10MJ-16MBSPPWD
1.1/16"-12	1/2"-14	48.0	27.0	240	12MJ-8MBSPPWD
1.1/16"-12	3/4"-14	52.0	32.0	240	12MJ-12MBSPPWD
1.1/16"-12	1"-11	53.5	41.0	240	12MJ-16MBSPPWD
1.1/16"-12	1.1/4"-11	56.0	50.0	160	12MJ-20MBSPPWD
1.5/16"-12	3/4"-14	52.5	36.0	210	16MJ-12MBSPPWD
1.5/16"-12	1"-11	55.0	41.0	210	16MJ-16MBSPPWD
1.5/16"-12	1.1/4"-11	57.5	50.0	160	16MJ-20MBSPPWD
1.5/8"-12	3/4"-14	54.5	46.0	170	20MJ-12MBSPPWD
1.5/8"-12	1"-11	58.5	46.0	170	20MJ-16MBSPPWD
1.5/8"-12	1.1/4"-11	58.5	50.0	160	20MJ-20MBSPPWD
1.5/8"-12	1.1/2"-11	63.5	55.0	160	20MJ-24MBSPPWD