


## Flange welding adaptor for metric tube

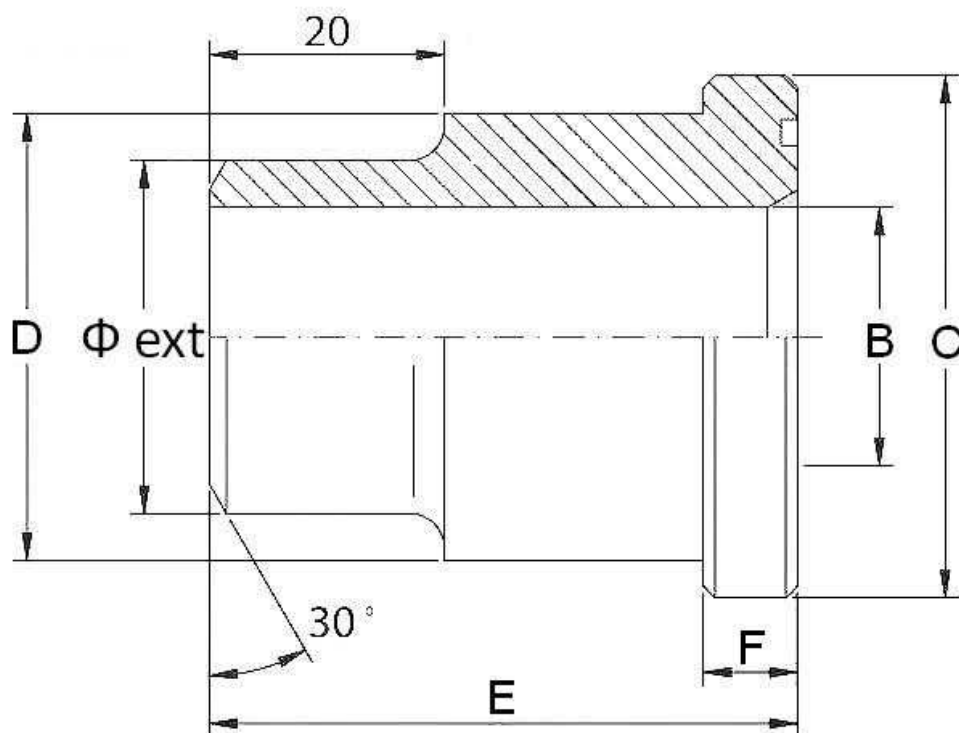

| Part nº            | Serie    | Ø outer | Size  | O'Ring | ØB  | C     | D     | E  | F     |
|--------------------|----------|---------|-------|--------|-----|-------|-------|----|-------|
| <b>BSM310816</b>   | 3000 PSI | 16      | 1/2"  | 4075   | 12  | 30,2  | 24    | 41 | 6,73  |
| <b>BSM311225</b>   | 3000 PSI | 25      | 3/4"  | 4100   | 19  | 38,1  | 32    | 50 | 6,73  |
| <b>BSM311630</b>   | 3000 PSI | 30      | 1"    | 4131   | 22  | 44,4  | 38    | 50 | 8,00  |
| <b>BSM3132038</b>  | 3000 PSI | 38      | 1"1/4 | 4150   | 28  | 50,8  | 43    | 55 | 8,00  |
| <b>BSM312445</b>   | 3000 PSI | 45      | 1"1/2 | 4187   | 35  | 60,3  | 50    | 57 | 8,00  |
| <b>BSM313260</b>   | 3000 PSI | 60      | 2"    | 4225   | 50  | 71,4  | 62    | 57 | 9,53  |
| <b>BSM314070</b>   | 3000 PSI | 70      | 2"1/2 | 4275   | 55  | 84,1  | 74    | 58 | 9,53  |
| <b>BSM314880</b>   | 3000 PSI | 80      | 3"    | 4337   | 68  | 101,6 | 90    | 60 | 9,53  |
| <b>BSM3156100</b>  | 3000 PSI | 100     | 3"1/2 | 4387   | 89  | 114,3 | 102   | 80 | 11,20 |
| <b>BSM31641143</b> | 3000 PSI | 114.3   | 4"    | 4437   | 99  | 127   | 114,3 | 80 | 11,20 |
| <b>BSM31801397</b> | 3000 PSI | 139.7   | 5"    | 4537   | 120 | 152,4 | 139,7 | 80 | 11,20 |
| <b>BSM610816</b>   | 6000 PSI | 16      | 1/2"  | 4075   | 12  | 31,8  | 24    | 34 | 7,75  |
| <b>BSM611225</b>   | 6000 PSI | 25      | 3/4"  | 4100   | 18  | 41,3  | 32    | 38 | 8,76  |
| <b>BSM611630</b>   | 6000 PSI | 30      | 1"    | 4131   | 22  | 47,6  | 38    | 40 | 9,53  |
| <b>BSM612038</b>   | 6000 PSI | 38      | 1"1/4 | 4150   | 27  | 54    | 44    | 45 | 10,29 |
| <b>BSM612445</b>   | 6000 PSI | 45      | 1"1/2 | 4187   | 32  | 63,5  | 51    | 50 | 12,57 |
| <b>BSM613260</b>   | 6000 PSI | 60      | 2"    | 4225   | 45  | 79,4  | 67    | 58 | 12,57 |