



Couplings for *MF* High Pressure


Couplings with surface treatment in Zinc-Nickel

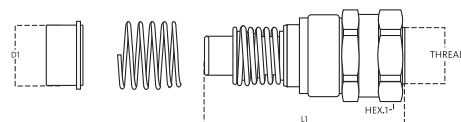


Size			Thread Details			COUPLINGS FOR FIXED PLATE								
dash	mm	inch	Thread Type	Standard	Thread	Part Number	L1 (L1+ thread)		D1		HEX 1		Available for series	
							mm	inch	mm	inch	mm	inch		
06	10	3/8"	F BSPP	ISO 1179-1	BSPP 3/8" FEMALE	KITFHB06-38GF	75	3	30	1.2	30	1.2	PH	
08	12,5	1/2"	F BSPP	ISO 1179-1	BSPP 1/2" FEMALE	KITFHB08-12GF	80,5	3,2	37	1,5	37	1,5	PH	
12	20	3/4"	F BSPP	ISO 1179-1	BSPP 3/4" FEMALE	KITFHB12-34GF	100	3,9	47	1,9	42	1,6	PH	
16	25	1"	F BSPP	ISO 1179-1	BSPP 1" FEMALE	KITFHB16-1GF	99,8	3,9	55	2,2	55	2,1	PH	

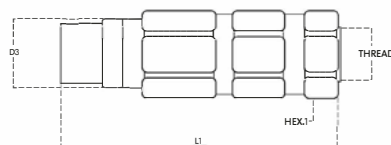

Size			Thread Details			COUPLINGS FOR MOBILE PLATE								Available for series
dash	mm	inch	Thread Type	Standard	Thread	Part Number	Pressure eliminator	L1 (L1+ thread)		D3		HEX 1		
								mm	inch	mm	inch	mm	inch	
06	10	3/8"	F BSPP	ISO 1179-1	BSPP 3/8" FEMALE	KIT3FHP06-38GM	YES	96.4	3.8	19.6	0.8	30	1.2	PH
08	12.5	1/2"	F BSPP	ISO 1179-1	BSPP 1/2" FEMALE	KIT3FHP08-12GM	YES	115.7	4.6	24.9	1.0	34	1.3	PH
12	20	3/4"	O/ BSPP	BS 5380	BSPP 3/4 FEMALE ORB	KIT3FHP12-34GM	YES	129	5.1	29.9	1.2	42	1.6	PH
16	25	1"	F BSPP	ISO 1179-1	BSPP 1" FEMALE	KIT3FHP16-1GM	YES	145	5.7	36	1.4	34	1.3	PH



F



O/