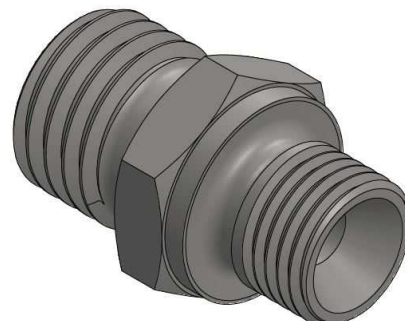
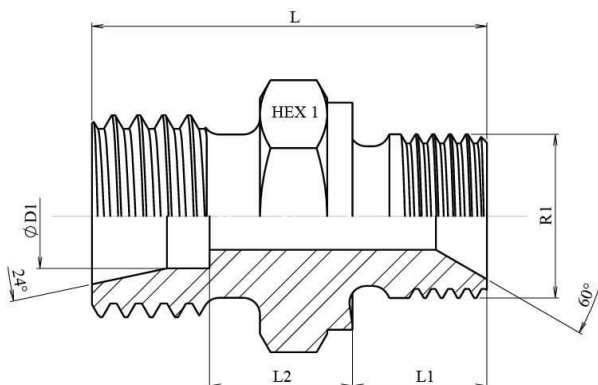


Straight male stud coupling BSP cyl. 60°

Stainless Steel AISI 316-L

1/2

Part n°	ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1
Z STA AL 6 RC 1/8	6	L	1/8"	315	23,5	8	8,5	14
Z STA AL 6 RC 1/4	6	L	1/4"	315	28	11	10	19
Z STA AL 6 RC 3/8	6	L	3/8"	315	30	12	11	22
Z STA AL 6 RC 1/2	6	L	1/2"	315	32,5	14	11,5	27
Z STA AL 8 RC 1/8	8	L	1/8"	315	24,5	8	9,5	14
Z STA AL 8 RC 1/4	8	L	1/4"	315	29	11	11	19
Z STA AL 8 RC 3/8	8	L	3/8"	315	30,5	14,5	9	22
Z STA AL 8 RC 1/2	8	L	1/2"	315	32,5	14	11,5	27
Z STA AL 10 RC 1/8	10	L	1/8"	315	24,5	8	9,5	17
Z STA AL 10 RC 1/4	10	L	1/4"	315	30	11	12	19
Z STA AL 10 RC 3/8	10	L	3/8"	315	31	12	12	22
Z STA AL 10 RC 1/2	10	L	1/2"	315	33,5	14	12,5	27
Z STA AL 12 RC 1/4	12	L	1/4"	315	31	11	13	19
Z STA AL 12 RC 3/8	12	L	3/8"	315	31,5	12	11,5	22
Z STA AL 12 RC 1/2	12	L	1/2"	315	35	15	12	27
Z STA AL 15 RC 3/8	15	L	3/8"	315	32,5	12	13,5	24
Z STA AL 15 RC 1/2	15	L	1/2"	315	32,5	14	9,5	27
Z STA AL 15 RC 3/4	15	L	3/4"	315	38	16	15	32
Z STA AL 18 RC 3/8	18	L	3/8"	315	33	12	13,5	27
Z STA AL 18 RC 1/2	18	L	1/2"	315	36	14	15	27
Z STA AL 18 RC 3/4	18	L	3/4"	315	38,5	16	15	32
Z STA AL 22 RC 3/8	22	L	3/8"	160	36	15	13,5	32
Z STA AL 22 RC 1/2	22	L	1/2"	160	38	14	17	32
Z STA AL 22 RC 3/4	22	L	3/4"	160	40	16	16,5	32
Z STA AL 22 RC 1	22	L	1"	160	44,5	19	18	41
Z STA AL 28 RC 3/4	28	L	3/4"	160	41	16	17,5	41
Z STA AL 28 RC 1	28	L	1"	160	43	19	16,5	41

Straight male stud coupling BSP cyl. 60°

Stainless Steel AISI 316-L

2/2

Part nº	ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1
Z STA AL 35 RC 1 1/4	35	L	1" 1/4	160	48	20	17,5	50
Z STA AL 35 RC 1 1/2	35	L	1" 1/2	160	52	22	19,5	55
Z STA AL 42 RC 1 1/4	42	L	1" 1/4	160	50	20	19	55
Z STA AL 42 RC 1 1/2	42	L	1" 1/2	160	52	22	19	55
Z STA AS 6 RC 1/4	6	S	1/4"	630	32	11	14	19
Z STA AS 6 RC 3/8	6	S	3/8"	630	35	12,5	15,5	22
Z STA AS 8 RC 1/4	8	S	1/4"	630	34	11	16	19
Z STA AS 8 RC 3/8	8	S	3/8"	630	35	12	16	22
Z STA AS 8 RC 1/2	8	S	1/2"	630	37	14	16	27
Z STA AS 10 RC 1/4	10	S	1/4"	630	34	11	15,5	19
Z STA AS 10 RC 3/8	10	S	3/8"	630	34,5	12	15	22
Z STA AS 10 RC 1/2	10	S	1/2"	630	39,5	14	18	27
Z STA AS 12 RC 1/4	12	S	1/4"	630	34	11	15	22
Z STA AS 12 RC 3/8	12	S	3/8"	630	37	12	17,5	22
Z STA AS 12 RC 1/2	12	S	1/2"	630	39	14	17,5	27
Z STA AS 14 RC 3/8	14	S	3/8"	630	39	12	19	24
Z STA AS 14 RC 1/2	14	S	1/2"	630	41	14	19	27
Z STA AS 16 RC 3/8	16	S	3/8"	400	39	12	18,5	27
Z STA AS 16 RC 1/2	16	S	1/2"	400	41,5	15	16	27
Z STA AS 16 RC 3/4	16	S	3/4"	400	43,5	16	19	32
Z STA AS 20 RC 3/8	20	S	3/8"	400	43	14	20,5	32
Z STA AS 20 RC 1/2	20	S	1/2"	400	45	14	20,5	32
Z STA AS 20 RC 3/4	20	S	3/4"	400	47,5	16	21	32
Z STA AS 20 RC 1	20	S	1"	400	52	19	22,5	41
Z STA AS 25 RC 3/4	25	S	3/4"	400	50,5	16	22,5	41
Z STA AS 25 RC 1	25	S	1"	400	53,5	19	22,5	41
Z STA AS 25 RC 1 1/4	25	S	1" 1/4"	400	55	20	23	50
Z STA AS 30 RC 1	30	S	1"	400	55,5	19	23	46
Z STA AS 30 RC 1 1/4	30	S	1" 1/4	400	57	20	23,5	50
Z STA AS 30 RC 1 1/2	30	S	1" 1/2	400	62	22	24	55
Z STA AS 38 RC 1 1/4	38	S	1" 1/4	315	62	20	26	55
Z STA AS 38 RC 1 1/2	38	S	1" 1/2	315	64	22	26	55