


Twin Weld Plate for 2 Clamp Bodies Type DSP



STAUFF Group 1

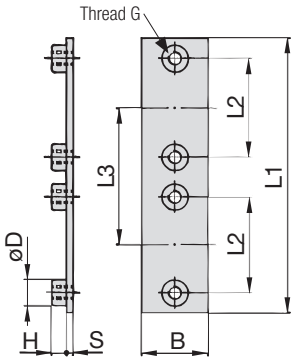

STAUFF Group 1A to 8



Group STAUFF	DIN	Dimensions (mm/in) Thread G	L1	L2	L3	B	S	H	ØD	Ordering Codes (Standard Options)
1	0	M6	87	40	40	30	3	6.5	12	DSP-1-40-M-W2
		1/4–20 UNC	3.43	1.57	1.57	1.18	.12	.26	.47	DSP-1-40-U-W2
1A	1	M6	77	20	37	30	3	6.5	12	DSP-1A-37-M-W2
		1/4–20 UNC	3.03	.79	1.46	1.18	.12	.26	.47	DSP-1A-37-U-W2
2	2	M6	86	26	44	30	3	6.5	12	DSP-2-44-M-W2
		1/4–20 UNC	3.39	1.02	1.73	1.18	.12	.26	.47	DSP-2-44-U-W2
3	3	M6	102	33	52	30	3	6.5	12	DSP-3-52-M-W2
		1/4–20 UNC	4.02	1.30	2.05	1.18	.12	.26	.47	DSP-3-52-U-W2
4	4	M6	120	40	60	30	3	6.5	12	DSP-4-60-M-W2
		1/4–20 UNC	4.72	1.57	2.36	1.18	.12	.26	.47	DSP-4-60-U-W2
5	5	M6	145	52	75	30	3	6.5	12	DSP-5-75-M-W2
		1/4–20 UNC	5.71	2.05	2.95	1.18	.12	.26	.47	DSP-5-75-U-W2
6	6	M6	178	66	90	30	3	6.5	12	DSP-6-90-M-W2
		1/4–20 UNC	7.01	2.60	3.54	1.18	.12	.26	.47	DSP-6-90-U-W2


All threaded parts are available with Metric ISO thread or unified coarse (UNC) thread according to dimension table.
Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.

Ordering Codes


Weld Plate ***DSP-*1-*40-*M-*W2**

* Twin Weld Plate for 2 Clamp Bodies		DSP
* STAUFF Group		1
* Pipe center spacing L3 (mm)		40
* Thread code	Metric ISO thread	M
	Unified coarse (UNC) thread	U
* Material code	Carbon Steel, phosphated	W2
	Carbon Steel, zinc/nickel-plated	W3
	Stainless Steel V2A 1.4301 / 1.4305 (AISI 304 / 303)	W4
	Stainless Steel V4A 1.4401 / 1.4571 (AISI 316 / 316 Ti)	W5


Group Weld Plate for 5 or 10 Clamp Bodies Type RAP



STAUFF Group 1



STAUFF Group 1A to 8

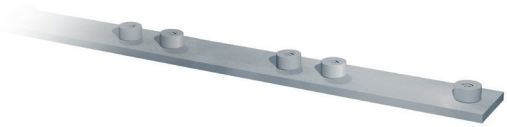

Group STAUFF	DIN	Dimensions (mm/in) Thread G	L1	L2	L3	B	S	H	ØD	Ordering Codes (Standard Options)
1	0	M6	314	31	31	30	4	6,5	12	RAP-1-31-10-M-W1
		1/4–20 UNC	12.36	1.22	1.22	1.18	.16	.26	.47	RAP-1-31-10-U-W1
1A	1	M6	373	20	37	30	4	6,5	12	RAP-1A-37-10-M-W1
		1/4–20 UNC	14.69	.79	1.46	1.18	.16	.26	.47	RAP-1A-37-10-U-W1
2	2	M6	442	26	44	30	4	6,5	12	RAP-2-44-10-M-W1
		1/4–20 UNC	17.40	1.02	1.73	1.18	.16	.26	.47	RAP-2-44-10-U-W1
3	3	M6	521	33	52	30	4	6,5	12	RAP-3-52-10-M-W1
		1/4–20 UNC	20.51	1.30	2.05	1.18	.16	.26	.47	RAP-3-52-10-U-W1
4	4	M6	300	40	60	30	4	6,5	12	RAP-4-60-5-M-W1
		1/4–20 UNC	11.81	1.57	2.36	1.18	.16	.26	.47	RAP-4-60-5-U-W1
5	5	M6	378	52	75	30	4	6,5	12	RAP-5-75-5-M-W1
		1/4–20 UNC	14.88	2.05	2.95	1.18	.16	.26	.47	RAP-5-75-5-U-W1
6	6	M6	450	66	90	30	4	6,5	12	RAP-6-90-5-M-W1
		1/4–20 UNC	17.72	2.60	3.54	1.18	.16	.26	.47	RAP-6-90-5-U-W1

All threaded parts are available with Metric ISO thread or unified coarse (UNC) thread according to dimension table.
Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.

Ordering Codes

Weld Plate ***RAP-*1-*31-*10-*M-*W1**

* Group Weld Plate for 5 or 10 Clamp Bodies		RAP
* STAUFF Group		1
* Pipe center spacing L3 (mm)		31
* Number of clamps		10
* Thread code	Metric ISO thread	M
	Unified coarse (UNC) thread	U
* Material code	Carbon Steel, phosphated	W2
	Carbon Steel, zinc/nickel-plated	W3
	Stainless Steel V2A 1.4301 / 1.4305 (AISI 304 / 303)	W4
	Stainless Steel V4A 1.4401 / 1.4571 (AISI 316 / 316 Ti)	W5

Dimensional drawings: All dimensions in mm (in).