


## Rubrik 3.21

### Straight

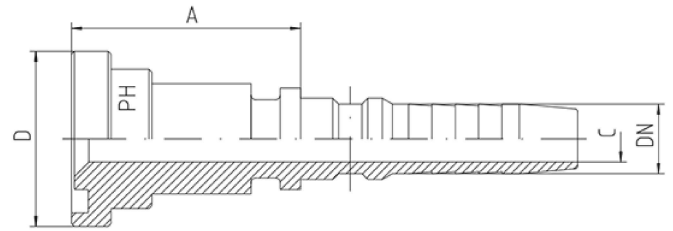

With Wire Trap Area - Heavy Series Interlock Series SAE-ISO-Flange SFL 3 = 3.000 PSI - Straight SFS 6 = 6.000 PSI - Straight Other sizes on request!

| Hose | Bore | Flange Dimensions |     | Approx. Dimensions |   | Order-Code |
|------|------|-------------------|-----|--------------------|---|------------|
| DN   | in.  | D                 | in. | A                  | C |            |

#### Series 3.000 P.S.I.

|    |        |      |        |      |      |                     |
|----|--------|------|--------|------|------|---------------------|
| 19 | 3/4"   | 38,1 | 3/4"   | 41,0 | 14,5 | I-SFL3-3/4"-DN 19   |
| 19 | 3/4"   | 44,5 | 1"     | 44,5 | 14,5 | I-SFL3-1"-DN 19     |
| 25 | 1"     | 44,5 | 1"     | 52,5 | 20,0 | I-SFL3-1"-DN 25     |
| 25 | 1"     | 50,8 | 1 1/4" | 53,0 | 20,0 | I-SFL3-1 1/4"-DN 25 |
| 31 | 1 1/4" | 50,8 | 1 1/4" | 53,0 | 25,0 | I-SFL3-1 1/4"-DN 31 |
| 31 | 1 1/4" | 60,3 | 1 1/2" | 50,5 | 25,0 | I-SFL3-1 1/2"-DN 31 |
| 38 | 1 1/2" | 60,3 | 1 1/2" | 77,5 | 31,5 | I-SFL3-1 1/2"-DN 38 |
| 38 | 1 1/2" | 71,4 | 2"     | 72,0 | 31,5 | I-SFL3-2"-DN 38     |
| 51 | 2"     | 71,4 | 2"     | 72,0 | 42,0 | I-SFL3-2"-DN 51     |

#### Series 6.000 P.S.I.

|    |        |      |        |      |      |                     |
|----|--------|------|--------|------|------|---------------------|
| 19 | 3/4"   | 41,3 | 3/4"   | 52,0 | 14,5 | I-SFS6-3/4"-DN 19   |
| 25 | 1"     | 41,3 | 3/4"   | 47,0 | 20,0 | I-SFS6-3/4"-DN 25   |
| 19 | 3/4"   | 47,6 | 1"     | 44,5 | 14,5 | I-SFS6-1"-DN 19     |
| 25 | 1"     | 47,6 | 1"     | 63,0 | 20,0 | I-SFS6-1"-DN 25     |
| 31 | 1 1/4" | 47,6 | 1"     | 60,0 | 25,0 | I-SFS6-1"-DN 31     |
| 25 | 1"     | 54,0 | 1 1/4" | 54,0 | 20,0 | I-SFS6-1 1/4"-DN 25 |
| 31 | 1 1/4" | 54,0 | 1 1/4" | 75,0 | 25,0 | I-SFS6-1 1/4"-DN 31 |



|    |        |      |        |       |      |                     |
|----|--------|------|--------|-------|------|---------------------|
| 38 | 1 1/2" | 54,0 | 1 1/4" | 105,0 | 25,0 | I-SFS6-1 1/4"-DN 38 |
| 31 | 1 1/4" | 63,5 | 1 1/2" | 75,5  | 25,0 | I-SFS6-1 1/2"-DN 31 |
| 38 | 1 1/2" | 63,5 | 1 1/2" | 103,0 | 31,5 | I-SFS6-1 1/2"-DN 38 |
| 38 | 1 1/2" | 79,4 | 2"     | 75,0  | 31,5 | I-SFS6-2"-DN 38     |
| 51 | 2"     | 79,4 | 2"     | 85,0  | 42,0 | I-SFS6-2"-DN 51     |