
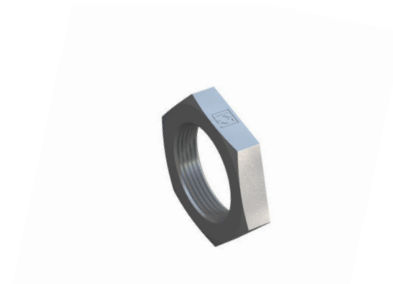


Hexagon Lock Nut Type FI-SKM • Series L / S



for Straight Bulkhead Fittings / Bulkhead Elbows

Series	Dimensions mm			Weight kg ca. per 100	Ordering Codes
	Thread T	L1	S1		
L	M 12 x 1,5	6	17	0,66	FI-SKM-06L-W3
	M 14 x 1,5	6	19	0,76	FI-SKM-08L/06S-W3
	M 16 x 1,5	6	22	1,04	FI-SKM-10L/08S-W3
	M 18 x 1,5	6	24	1,17	FI-SKM-12L/10S-W3
	M 22 x 1,5	7	30	2,25	FI-SKM-15L/14S-W3
	M 26 x 1,5	8	36	3,75	FI-SKM-18L-W3
	M 30 x 2	8	41	4,79	FI-SKM-22L/20S-W3
	M 36 x 2	9	46	5,90	FI-SKM-28L/25S-W3
	M 45 x 2	9	55	7,60	FI-SKM-35L-W3
S	M 52 x 2	10	65	12,20	FI-SKM-42L/38S-W3
	M 14 x 1,5	6	19	0,76	FI-SKM-08L/06S-W3
	M 16 x 1,5	6	22	1,04	FI-SKM-10L/08S-W3
	M 18 x 1,5	6	24	1,17	FI-SKM-12L/10S-W3
	M 20 x 1,5	6	27	1,54	FI-SKM-12S-W3
	M 22 x 1,5	7	30	2,25	FI-SKM-15L/14S-W3
	M 24 x 1,5	7	32	2,40	FI-SKM-16S-W3
	M 30 x 2	8	41	4,79	FI-SKM-22L/20S-W3
	M 36 x 2	9	46	5,90	FI-SKM-28L/25S-W3
	M 42 x 2	9	50	5,70	FI-SKM-30S-W3
	M 52 x 2	10	65	12,20	FI-SKM-42L/38S-W3

Ordering Codes

FI-SKM-06*L*-W3

* Hexagon Lock Nut for Bulkhead Fittings	FI-SKM
* Outside Tube Diameter D1 (in mm)	-06
* Series	Light Series L Heavy Series S
* Material Code	Steel, zinc/nickel-plated -W3

Please contact STAUFF for alternative materials and surface finishings.

