


ELEMENTI DI TENUTA PER NIPPLI

Nipple retention system

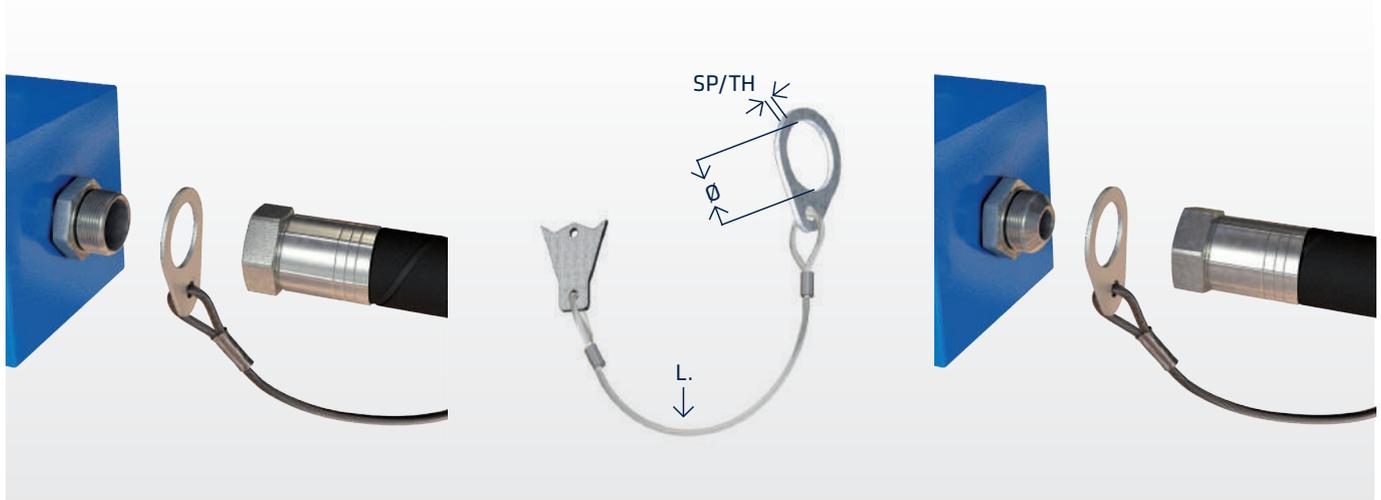

RACCORDI CONICI A 24° (DIN)

24° cone connectors (DIN)

CODICE CODE	ø M	ø mm ø inches	SP/TH mm inches	L. mm inches	Nr. Pezzi No. of PCS	Pressione Massima di lavoro bar - psi Max operating Pressure bar-psi	Piastrina incisione Cutting Plate
STOPFUDIN145	M6	14,5 0,571	2 0,079	300 11,811	10	450 6525	small
STOPFUDIN17	M6	17 0,669	2 0,079	300 11,811	10	445 6453	small
STOPFUDIN185	M6	18,5 0,728	2 0,079	300 11,811	10	420 6090	small
STOPFUDIN205	M6	20,5 0,807	2 0,079	300 11,811	10	420 6090	small
STOPFUDIN225	M6	22,5 0,886	2 0,079	300 11,811	10	420 6090	small
STOPFUDIN245	M6	24,5 0,965	2 0,079	300 11,811	10	420 6090	small
STOPFUDIN265	M6	26,5 1,043	2 0,079	300 11,811	10	420 6090	small
STOPFUDIN305	M6	30,5 1,201	2,5 0,098	300 11,811	10	420 6090	small
STOPFUDIN34	M8	34 1,339	2,5 0,098	450 17,717	10	420 6090	large
STOPFUDIN365	M8	36,5 1,437	2,5 0,098	450 17,717	10	420 6090	large
STOPFUDIN2365	M6	36,5 1,437	2,5 0,098	450 17,717	10	420 6090	large
STOPFUDIN425	M8	42,5 1,673	2,5 0,098	450 17,717	10	420 6090	large
STOPFUDIN455	M8	45,5 1,791	2,5 0,098	450 17,717	10	420 6090	large
STOPFUDIN2455	M6	45,5 1,791	2,5 0,098	450 17,717	10	420 6090	large
STOPFUDIN49	M8	49 1,929	2,5 0,098	450 17,717	10	420 6090	large
STOPFUDIN525	M8	52,5 2,067	2,5 0,098	450 17,717	10	385 5583	large
STOPFUDIN60	M8	60 2,362	2,5 0,098	450 17,717	10	350 5075	large

RACCORDI CON SVASATURA A 37° (JIC)

37° flared connectors (JIC)

CODICE CODE	ø M	ø mm ø inches	SP/TH mm inches	L. mm inches	Nr. Pezzi No. of PCS	Pressione Massima di lavoro bar - psi Max operating Pressure bar-psi	Piastrina incisione Cutting Plate
STOPFUJIC115	M6	11,5 0,452	2 0,079	300 11,811	10	450 6525	small
STOPFUJIC132	M6	13,2 0,519	2 0,079	300 11,811	10	450 6525	small
STOPFUJIC148	M6	14,8 0,452	2 0,079	300 11,811	10	450 6525	small
STOPFUJIC195	M6	19,5 0,767	2 0,079	300 11,811	10	420 6090	small
STOPFUJIC228	M6	22,8 0,897	2 0,079	300 11,811	10	420 6090	small
STOPFUJIC275	M6	27,5 1,082	2,5 0,098	300 11,811	10	420 6090	small
STOPFUJIC307	M6	30,7 1,208	2,5 0,098	300 11,811	10	420 6090	small
STOPFUJIC345	M6	34 1,339	2,5 0,098	450 17,717	10	420 6090	small
STOPFUJIC34	M8	34 1,339	2,5 0,098	450 17,717	10	420 6090	large
STOPFUJIC415S	M6	41,5 1,633	2,5 0,098	450 17,717	10	420 6090	small
STOPFUJIC415	M8	41,5 1,633	2,5 0,098	450 17,717	10	420 6090	large
STOPFUJIC48S	M6	48 1,889	2,5 0,098	450 17,717	10	420 6090	small
STOPFUJIC48	M8	48 1,889	2,5 0,098	450 17,717	10	420 6090	large
STOPFUJIC64	M8	64 2,519	2,5 0,098	450 17,717	10	350 5075	large