



TECHNICAL FEATURES AND OPTIONS



	Interchange ISO 14540 (High Pressure)		Sealing description Nitrile NBR		Connection system Screw
	Available sizes from 1/4" to 3/8"		Material/treatment Carbon steel /Cr3		Available threads NPT
	Operating pressure Up to 700 bar		Locking mechanism Screw to connect		Flow rate Up to 23 l/min
	Temperature (°C) -20°C / +100°C		Valving style Ball		Connection under pressure Connection: not allowed Disconnection: not allowed

BENEFITS

- Ball valves in hardened steel provide a good wearing resistance.
- Compact slim design.
- Simple to use.

HOW TO USE

- Before to connect, clean the mating surface of the couplings to avoid dirt inclusion in the circuit.
- To connect insert the male coupling in the female coupling, move forward the sleeve of the female coupling and screw it manually on the male coupling till it blocks.
- To disconnect unscrew totally the sleeve from the male coupling.

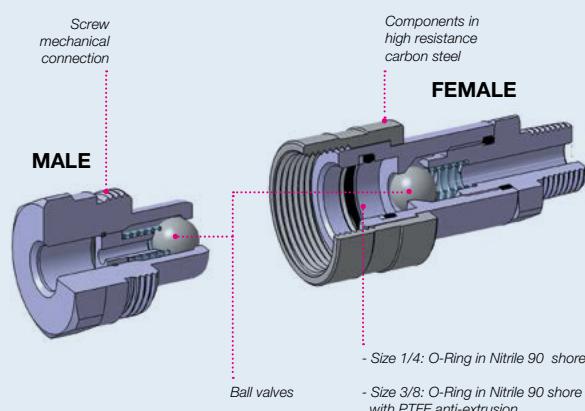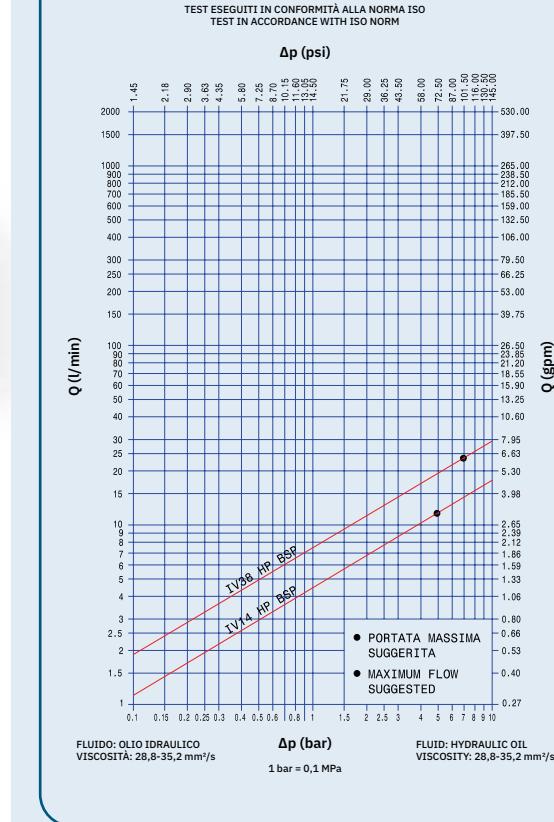

MAIN APPLICATIONS



PERFORMANCES

Size	Series/Size	Max. flow suggested		Max. operating pressure	
in		l/min	gpm	MPa	psi
1/4	IV14HP	12	3,18	70	10150
3/8	IV38HP	23	6,10	70	10150

Temperature range:

Standard seals NBR (Nitrile): from -20 °C to +100 °C (from -4 °F to +212 °F).

Please read carefully Instructions and warnings for proper selection of the products.

Different possible configurations:

Different threads available upon request.



WARNING

A defect, a wrong choice or an improper use of products, can cause injury to persons, animals and objects.

Never connect or disconnect with dynamic pressure (e.g. pump on).

Do not use the coupling disconnected with high impulse pressure.

Do not couple-uncouple with flow and/or pressure in the circuit.

Do not couple-uncouple when the temperature inside of the circuit is higher than 80 °C (176 °F).

Check the maximum allowable working pressure of the port in use.

Make sure that the medium used is compatible with seal and material as indicated for each series.



In case of doubt please contact Stucchi Technical Support.

The interchangeability is mentioned under the assumption that the manufacturer of the considered products has not changed any dimension.

It is mandatory to carefully read and closely follow the instructions before selecting or using any Stucchi products.

Always refer to the version uploaded in the Instructions and warning section of stucchigroup.com website for the latest release.

For specific, product-related, instructions, please contact Stucchi technical service.

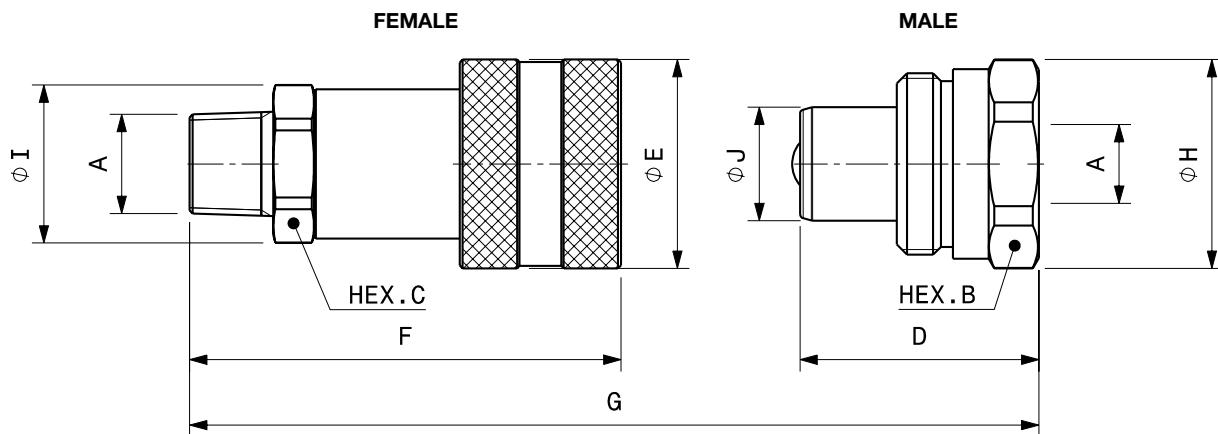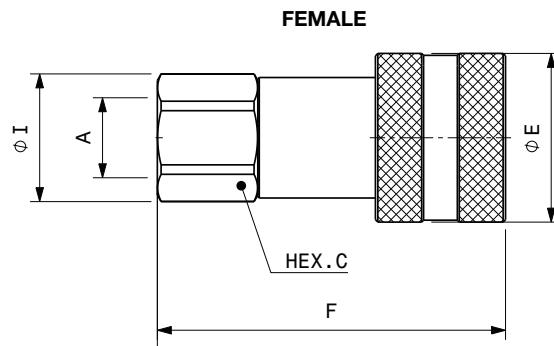Female with external thread

Female with internal thread

**Port description: FEMALE THREAD NPT (ANSI B1.20.1)
- MALE THREAD NPT (ANSI B1.20.1)**

BODY SIZE	Descriptive Code	Item Code	PORT (A)	Overall Length		Length		Hex		Diameter		Diameter		Weight kg	Weight lb						
				mm	in	mm	in	mm	in	mm	in	mm	in								
1/4"	F IV14HP 1/4 NPT EXT	Female	800201008	1/4"		F	60,8	2,39	C	22,0	0,87	I	24,5	0,96	E	28,0	1,10	0,14	0,30		
1/4"	F IV14HP 1/4 NPT	Female	800201034	1/4"	G	74,5	2,93	F	60,8	2,39	C	22,0	0,87	I	24,5	0,96	E	28,0	1,10	0,14	0,30
1/4"	M IV14HP 1/4 NPT	Male	800201009	1/4"		D	32,5	1,28	B	19,0	0,75	H	28,0	1,10	J	15,8	0,62	0,07	0,16		
3/8"	F IV38HP 1/4 NPT EXT	Female	800201006	1/4"		F	72,3	2,85	C	24,0	0,94	I	26,5	1,04	E	35,0	1,38	0,21	0,47		
3/8"	F IV38HP 1/4 NPT	Female	800201022	1/4"	G	F+D-18,8	F+D-0,74	F	69,9	2,75	C	24,0	0,94	I	26,5	1,04	E	35,0	1,38	0,22	0,49
3/8"	M IV38HP 1/4 NPT	Male	800201023	1/4"		D	40,0	1,57	B	32,0	1,26	H	35,0	1,38	J	19,0	0,75	0,15	0,33		
3/8"	F IV38HP 3/8 NPT EXT	Female	800201004	3/8"		F	72,2	2,84	C	24,0	0,94	I	26,5	1,04	E	35,0	1,38	0,22	0,49		
3/8"	F IV38HP 3/8 NPT	Female	800201014	3/8"	G	F+D-25,4	F+D-1,00	F	72,3	2,85	C	24,0	0,94	I	26,5	1,04	E	35,0	1,38	0,24	0,52
3/8"	M IV38HP 3/8 NPT	Male	800201005	3/8"		D	40,0	1,57	B	32,0	1,26	H	35,0	1,38	J	19,0	0,75	0,14	0,31		





SPARE KIT SEAL FOR FEMALE

Repair kit / OR (+BK)		
Body Size	Description	Part Number
1/4"	OR F IV14HP	815700652
3/8"	OR+BK F IV38HP	815700650

1/4" OR F IV14HP 815700652

3/8" OR+BK F IV38HP 815700650


O-Ring in NBR
Backup in Teflon®

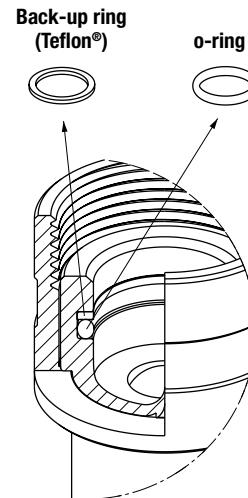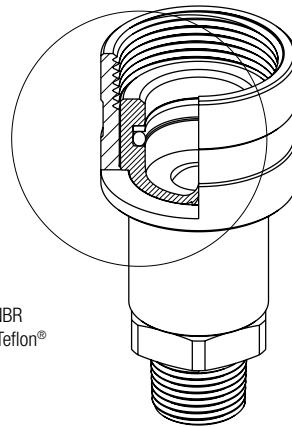


PROTECTIVE CAPS FOR IV-HP SERIES

Protective caps are always recommended to protect the couplings from damage, dirt inclusion, and will increase the product life. For the IV-HP series are available two kind of materials:


- Plastic caps with lanyard (standard color: black)
- Cr3 steel with lanyard (standard colors: natural)



Plug for
FEMALE coupling
Plastic




Cap for
MALE coupling
Plastic




Protective Cap			
Body Size/Description		Part Number	
		Plug for Female	Cap for Male
1/4" IV14HP		815603010	815603011
3/8" IV38HP		815603012	815603013

Plug for FEMALE coupling
Carbon Steel



Cap for MALE coupling
Carbon Steel



Protective Cap			
Body Size/Description		Part Number	
		Plug for Female	Cap for Male
1/4" IV14HP		815605004	815605005
3/8" IV38HP		815605002	815605003

STUCCHI Quick Couplings Catalog - December 2024 - All right reserved.
Texts, data and illustrations mentioned in this catalogue may be changed by Stucchi at any time, without notice; always refer to the version uploaded on the English version of stucchigroup.com/en website for the latest release. In case of doubt, please contact Stucchi technical service.