


SAE FFORX


Female SAE Flat Face 'O' ring swivel.

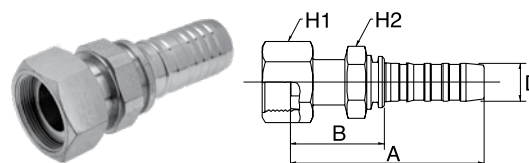

D				A	B	H1	H2	REF.
-size	DN	"		mm	mm	mm	mm	GSP
-24	40	1.1/2	2" - 12 UN	137.0	63.4	60.0	55.0	24GSP24FFORX

SAE FL

SAE 'O' ring flange. Code 61.

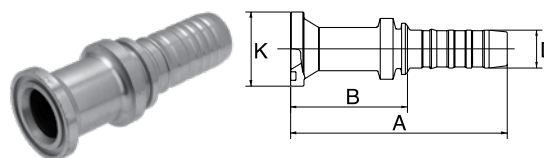


D				A	B	K	KIT	REF.
-size	DN	"		mm	mm	mm		GSP
-24	40	1.1/2	1.1/2"	152.9	79.3	60.3	24 PA-FL	24GSP24FL
-24	40	1.1/2	2"	152.9	79.3	71.4	32 PA-FL	24GSP32FL
-32	50	2	2"	159.3	67.3	71.4	32 PA-FL	32GSP32FL

Details on flange kits see page 250.

SAE FL22

SAE 'O' ring flange. Code 61.

22° swept elbow.

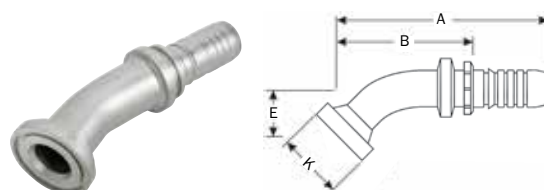

D				A	B	E	K	KIT	REF.
-size	DN	"		mm	mm	mm	mm		GSP
-24	40	1.1/2	1.1/2"	211.0	137.5	18.0	60.3	24 PA-FL	24GSP24FL22M
-24	40	1.1/2	2"	214.0	140.2	22.0	71.4	24 PA-FL	24GSP32FL22M

Details on flange kits see page 250. / M: Short drop per ISO 12151-3.

Unless otherwise stated the coupling meets the pressure rating requirements of the respective international standard.