



STAUFF Group 1

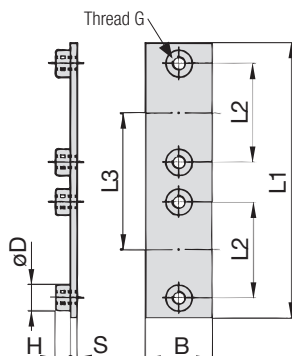

STAUFF Group 1A to 8

Twin Weld Plate for 2 Clamp Bodies Type DSP




Group STAUFF	DIN	Dimensions (mm/in) Thread G	L1	L2	L3	B	S	H	ØD	Ordering Codes (Standard Options)
1	0	M6	87	40	40	30	3	6.5	12	DSP-1-40-M-W2
		1/4-20 UNC	3.43	1.57	1.57	1.18	.12	.26	.47	DSP-1-40-U-W2
1A	1	M6	77	20	37	30	3	6.5	12	DSP-1A-37-M-W2
		1/4-20 UNC	3.03	.79	1.46	1.18	.12	.26	.47	DSP-1A-37-U-W2
2	2	M6	86	26	44	30	3	6.5	12	DSP-2-44-M-W2
		1/4-20 UNC	3.39	1.02	1.73	1.18	.12	.26	.47	DSP-2-44-U-W2
3	3	M6	102	33	52	30	3	6.5	12	DSP-3-52-M-W2
		1/4-20 UNC	4.02	1.30	2.05	1.18	.12	.26	.47	DSP-3-52-U-W2
4	4	M6	120	40	60	30	3	6.5	12	DSP-4-60-M-W2
		1/4-20 UNC	4.72	1.57	2.36	1.18	.12	.26	.47	DSP-4-60-U-W2
5	5	M6	145	52	75	30	3	6.5	12	DSP-5-75-M-W2
		1/4-20 UNC	5.71	2.05	2.95	1.18	.12	.26	.47	DSP-5-75-U-W2
6	6	M6	178	66	90	30	3	6.5	12	DSP-6-90-M-W2
		1/4-20 UNC	7.01	2.60	3.54	1.18	.12	.26	.47	DSP-6-90-U-W2

All threaded parts are available with Metric ISO thread or unified coarse (UNC) thread according to dimension table.
Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.


Ordering Codes

Weld Plate *DSP-*1-*40-*M-*W2

* Twin Weld Plate for 2 Clamp Bodies	DSP
* STAUFF Group	1
* Pipe center spacing L3 (mm)	40
* Thread code	Metric ISO thread Unified coarse (UNC) thread
	M U
* Material code	Carbon Steel, phosphated Carbon Steel, zinc/nickel-plated
	W2 W3
	Stainless Steel V2A 1.4301 / 1.4305 (AISI 304 / 303)
	Stainless Steel V4A 1.4401 / 1.4571 (AISI 316 / 316 Ti)
	W4 W5




STAUFF Group 1



STAUFF Group 1A to 8

Group Weld Plate for 5 or 10 Clamp Bodies Type RAP



Group STAUFF	DIN	Dimensions (mm/in) Thread G	L1	L2	L3	B	S	H	ØD	Ordering Codes (Standard Options)
1	0	M6	314	31	31	30	4	6.5	12	RAP-1-31-10-M-W1
		1/4-20 UNC	12.36	1.22	1.22	1.18	.16	.26	.47	RAP-1-31-10-U-W1
1A	1	M6	373	20	37	30	4	6.5	12	RAP-1A-37-10-M-W1
		1/4-20 UNC	14.69	.79	1.46	1.18	.16	.26	.47	RAP-1A-37-10-U-W1
2	2	M6	442	26	44	30	4	6.5	12	RAP-2-44-10-M-W1
		1/4-20 UNC	17.40	1.02	1.73	1.18	.16	.26	.47	RAP-2-44-10-U-W1
3	3	M6	521	33	52	30	4	6.5	12	RAP-3-52-10-M-W1
		1/4-20 UNC	20.51	1.30	2.05	1.18	.16	.26	.47	RAP-3-52-10-U-W1
4	4	M6	300	40	60	30	4	6.5	12	RAP-4-60-5-M-W1
		1/4-20 UNC	11.81	1.57	2.36	1.18	.16	.26	.47	RAP-4-60-5-U-W1
5	5	M6	378	52	75	30	4	6.5	12	RAP-5-75-5-M-W1
		1/4-20 UNC	14.88	2.05	2.95	1.18	.16	.26	.47	RAP-5-75-5-U-W1
6	6	M6	450	66	90	30	4	6.5	12	RAP-6-90-5-M-W1
		1/4-20 UNC	17.72	2.60	3.54	1.18	.16	.26	.47	RAP-6-90-5-U-W1

All threaded parts are available with Metric ISO thread or unified coarse (UNC) thread according to dimension table.
Alternative materials and surface finishings are available upon request. Contact STAUFF for further information.

Ordering Codes

Weld Plate *RAP-*1-*31-*10-*M-*W1

* Group Weld Plate for 5 or 10 Clamp Bodies	RAP
* STAUFF Group	1
* Pipe center spacing L3 (mm)	31
* Number of clamps	10
* Thread code	Metric ISO thread Unified coarse (UNC) thread
	M U
* Material code	Carbon Steel, phosphated Carbon Steel, zinc/nickel-plated
	W2 W3
	Stainless Steel V2A 1.4301 / 1.4305 (AISI 304 / 303)
	Stainless Steel V4A 1.4401 / 1.4571 (AISI 316 / 316 Ti)
	W4 W5